

POINT I/O Modules

Bulletin 1734
Selection Guide



Important User Information

Solid state equipment has operational characteristics differing from those of electromechanical equipment. Safety Guidelines for the Application, Installation and Maintenance of Solid State Controls (publication [SGI-1.1](http://literature.rockwellautomation.com) available from your local Rockwell Automation sales office or online at <http://literature.rockwellautomation.com>) describes some important differences between solid state equipment and hard-wired electromechanical devices. Because of this difference, and also because of the wide variety of uses for solid state equipment, all persons responsible for applying this equipment must satisfy themselves that each intended application of this equipment is acceptable.





In no event will Rockwell Automation, Inc. be responsible or liable for indirect or consequential damages resulting from the use or application of this equipment.

The examples and diagrams in this manual are included solely for illustrative purposes. Because of the many variables and requirements associated with any particular installation, Rockwell Automation, Inc. cannot assume responsibility or liability for actual use based on the examples and diagrams.

No patent liability is assumed by Rockwell Automation, Inc. with respect to use of information, circuits, equipment, or software described in this manual.

Reproduction of the contents of this manual, in whole or in part, without written permission of Rockwell Automation, Inc., is prohibited.

Throughout this manual, when necessary, we use notes to make you aware of safety considerations.

| | |
|--|--|
| WARNING  | Identifies information about practices or circumstances that can cause an explosion in a hazardous environment, which may lead to personal injury or death, property damage, or economic loss. |
| IMPORTANT | Identifies information that is critical for successful application and understanding of the product. |
| ATTENTION  | Identifies information about practices or circumstances that can lead to: personal injury or death, property damage, or economic loss. Attentions help you identify a hazard, avoid a hazard, and recognize the consequence. |
| SHOCK HAZARD  | Labels may be on or inside the equipment, such as a drive or motor, to alert people that dangerous voltage may be present. |
| BURN HAZARD  | Labels may be on or inside the equipment, such as a drive or motor, to alert people that surfaces may reach dangerous temperatures. |

Allen-Bradley, Rockwell Automation, POINT I/O, POINT Guard I/O, POINTBus, GuardLogix, , RSLogix 5000, DeviceLogix, and TechConnect are trademarks of Rockwell Automation, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

| | | |
|--|--|----|
| POINT I/O Family | Chapter 1 | |
| | Overview..... | 5 |
| | The POINT I/O System..... | 6 |
| | POINT I/O Features | 7 |
| | Specify a POINT I/O System..... | 8 |
| Select POINT I/O Communication Interfaces | Chapter 2 | |
| | Overview..... | 9 |
| | NetLinx Open Network Architecture..... | 9 |
| | Select a Network | 10 |
| | EtherNet I/P Network | 11 |
| | ControlNet Network | 12 |
| | Memory Requirements | 14 |
| | DeviceNet Network..... | 15 |
| | PROFIBUS DP Network | 17 |
| | Communication Adapter Environmental Specifications | 18 |
| Select POINT I/O Modules | Chapter 3 | |
| | Select POINT I/O Modules | 19 |
| | Digital I/O Modules | 20 |
| | Digital AC Input Modules..... | 21 |
| | Digital AC Output Modules | 21 |
| | Digital DC Input Modules..... | 22 |
| | Digital DC Output Modules | 22 |
| | Digital Contact Modules | 23 |
| | Digital I/O Modules Environmental Specifications | 24 |
| | Self-Configurable Modules | 24 |
| | Self-Configurable Modules Environmental Specifications | 25 |
| | Analog and Temperature I/O Modules | 26 |
| | Analog Input Modules..... | 27 |
| | Temperature Input Modules | 28 |
| | Analog Output Modules | 31 |
| | Analog and Temperature I/O Modules Environmental Specifications | 32 |
| | Specialty I/O Modules..... | 32 |
| | 1734-232ASC and 1734-485ASC Serial Interface Modules..... | 32 |
| | 1734-SSI Synchronous Serial Interface Module with Absolute Encoder | 33 |
| | 1734-ARM Address Reserve Module | 35 |
| | 1734-CTM Common Terminal and 1734-VTM Voltage Terminal Modules | 35 |
| | 1734-4IOL 4 Channel IO-Link Master Module..... | 36 |
| | Specialty I/O Modules Environmental Specifications..... | 37 |
| | Counter Modules | 38 |
| | Counter Modules Environmental Specifications | 41 |
| | Safety I/O Modules | 41 |
| | POINT I/O Accessories..... | 48 |

| | | |
|--|--|----|
| | Chapter 4 | |
| Select a Terminal Base Assembly | Terminal Base Assembly | 51 |
| | One-piece Terminal Bases | 53 |
| | Chapter 5 | |
| Select a Power Supply Unit | POINT I/O Communication Adapters | 55 |
| | Expansion Power Supplies | 56 |
| | Field Power Distributor | 59 |
| | Chapter 6 | |
| Mounting Requirements | Power Supply Distance Rating | 63 |
| | Mount the POINT I/O System | 64 |
| | Approximate Mounting Dimensions | 65 |
| | Chapter 7 | |
| Related Documentation | | |

POINT I/O Family


Overview



The POINT I/O family has modular I/O modules that are ideal for applications where flexibility and low-cost of ownership are key for successful control system design and operation. As a key element in the Rockwell Automation Integrated Architecture, its comprehensive diagnostics and configurable features allow the product to be easily applied to any automation system and reduce engineering costs through standardization. It can be used in remote device panels, local control panels, and can be accessed from many locations including the Internet. This product has just-what-you-need granularity in 1 to 8 points to reduce system cost and size.

Available features include Channel Level Diagnostics for quick troubleshooting, multiple termination options and flexibility to save money, cabinet space and commissioning/troubleshooting time, the ability to mix/match Safety I/O on the same bus, and available DeviceLogix for local control, fast response time. Self-Configuring modules are also available to reduce/simplify your design and your inventory.

The POINT I/O System

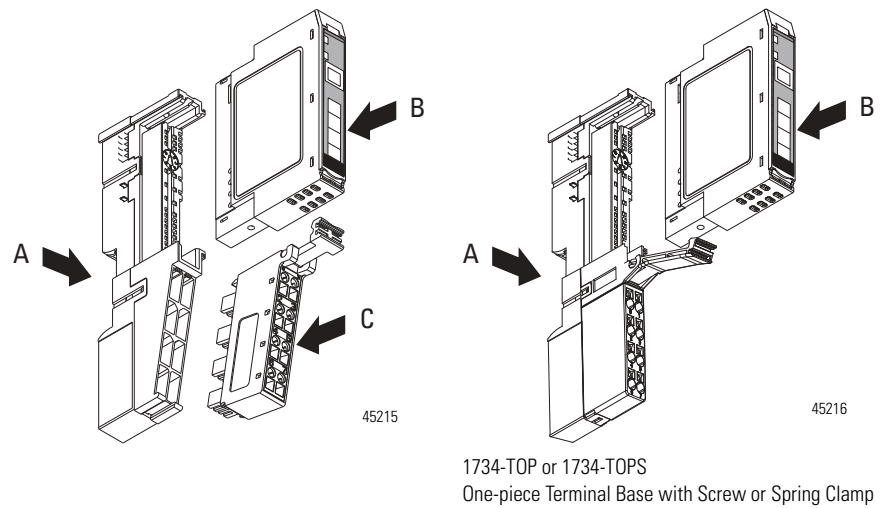

The base (A) mounts onto the DIN rail and provides the backplane. The POINT I/O module (B) snaps into the base. The removable terminal block (C) also snaps into the base and provides the wiring and terminations for field-side connections, as well as system power for the backplane.

POINT I/O has 4 major components:

- I/O modules provide the field interface and system-interface circuitry
- Communication interface modules provide the network-interface circuitry
- Terminal base units provide the wiring and signal termination for field-side connections and system power for the backplane
- Power distribution modules provide the expandability of the POINT I/O system and the flexibility to mix a variety of signal types

1734 POINT I/O modules offer 1 to 8 points per module. The I/O modules are interfaced to a network through a communication interface, which includes a built-in power supply that converts incoming 24V DC power to 5V DC backplane power. Each type of communication interface (Network Adaptor) supports a maximum of 13 to 17 I/O modules, with a maximum of 10 A field power. The I/O modules receive power from the power supply through the backplane. With an external power supply, you can expand a POINT I/O assembly up to a maximum of 63 I/O modules or 504 channels.

POINT I/O Features

| | |
|-----------------------|--|
| Adapters | <ul style="list-style-type: none"> • ControlNet • DeviceNet • EtherNet I/P • Profibus |
| I/O Types | <ul style="list-style-type: none"> • Digital • Analog • AC/DC • Thermocouple • RTD • Specialty |
| Module Density | 1...8 points |
| Specialty Modules | <ul style="list-style-type: none"> • Encoder • 1 MHz Counter In • Counter In with Outputs • Serial RS232 • RS485 • RS422 • Channel Isolated Thermocouple • RTD • Serial Synchronous Interface (SSI) • Address Reserve • 4 Channel IO-Link Master |
| Module Features | <ul style="list-style-type: none"> • Channel-level diagnostics (LED indicator and electronic) • Channel-level alarm and annunciation (electronic) • Channel-level open-wire detection with electronic feedback • Channel-level short-circuit detection with electronic feedback • Parameter-level explicit messaging • Removal and insertion under power (RIUP) • Horizontal or vertical mounting without derating • Automatic Device Replacement • Add-On-Profiles in RSLogix 5000 |
| Network Connectivity | <ul style="list-style-type: none"> • DeviceNet (including SubNet connectivity) • ControlNet (Logix controller only) • EtherNet/IP (Logix controller only) • PROFIBUS DP • OPC/DDE Data Monitoring" |
| Environmental Style | Class I, Division 2/Zone 2, Marine Certification, European ATEX Zone 2 3G |
| Modules per Node, max | Up to 63 |

Specify a POINT I/O System

Follow these steps as you specify your POINT I/O system:

| | Step | Remember to select |
|---|--|--|
| ✓ | 1 Select a communication interface Choose the interface module for your operating system. | <ul style="list-style-type: none"> the appropriate interface module a communication interface that meets the power requirements of your system |
| ✓ | 2 Select I/O devices based on field devices <ul style="list-style-type: none"> location of the device number of points needed appropriate catalog number number of points available per module number of modules | <ul style="list-style-type: none"> I/O modules – some have diagnostic features, electronic fusing, isolated inputs/outputs, and unique configurable features |
| ✓ | 3 Select a wiring base assembly Choose the appropriate wiring base assembly | <ul style="list-style-type: none"> the appropriate wiring base assembly: Single piece screw, single piece spring, or RTB (Removable Terminal Base) |
| ✓ | 4 Select optional power components Choose optional components to extend backplane power or change the field power distribution source. | <ul style="list-style-type: none"> additional power components as necessary adequate power capacity to meet I/O module backplane current requirements |
| ✓ | 5 Determine mounting requirements Determine needed dimensions based on the communication interface chosen. | <ul style="list-style-type: none"> the appropriate number of DIN rails based on the number of modules and the physical locations of those modules horizontal or vertical mounting with no thermal derating |

Select POINT I/O Communication Interfaces

Step 1 - Select:

- a communication interface module

| | |
|---|---------|
| NetLinx Open Network Architecture | page 9 |
| EtherNet I/P Network..... | page 11 |
| ControlNet Network..... | page 12 |
| DeviceNet Network..... | page 15 |
| PROFIBUS DP Network..... | page 17 |

Overview


Separate communication interface adapters are available for different networks. Install adapters into the POINTBus backplane to allow POINT I/O modules to communicate with a controller.

NetLinx Open Network Architecture

NetLinx Open Network Architecture is the Rockwell Automation strategy of using open networking technology for seamless, top-floor to shop-floor integration. The NetLinx-based networks – DeviceNet, ControlNet, and EtherNet/IP – all use the Common Industrial Protocol (CIP), so they speak a common language and share a universal set of communication services. NetLinx architecture, part of the Integrated Architecture platform, seamlessly integrates all the components in an automation system from a few devices on one network to multiple devices on multiple networks including access to the Internet – helping you to improve flexibility, reduce installation costs, and increase productivity.

- The EtherNet/IP network is an open industrial-networking standard that supports implicit and explicit messaging and uses commercial, off-the-shelf Ethernet equipment and physical media.
- The ControlNet network allows intelligent, high-speed control devices to share the information required for supervisory control, work-cell coordination, operator interface, remote device configuration, programming, and troubleshooting.

- The DeviceNet network offers low-cost, high-speed access to plant-floor data from a broad range of plant-floor devices and a significant reduction in wiring.

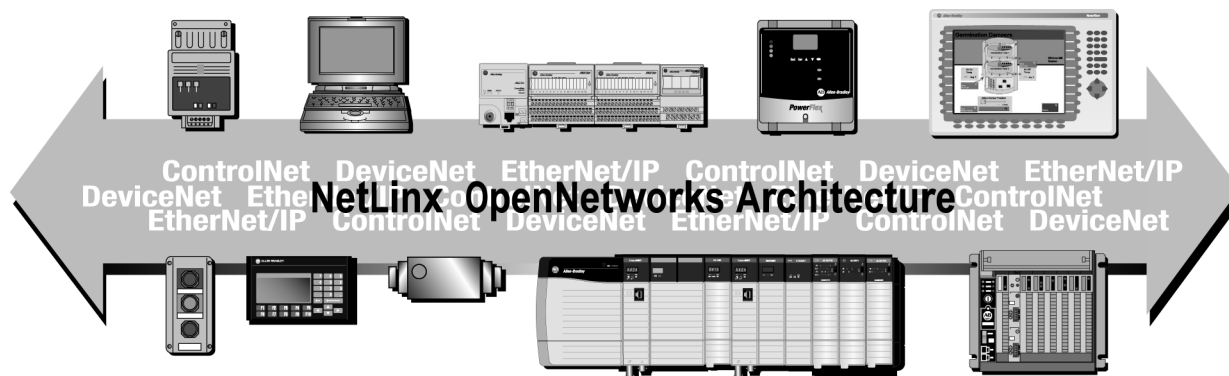

Select a Network

You can configure your system for information exchange between a range of devices and computing platforms and operating systems.

| Application requirements | Network | Select |
|---|-------------|-------------------------------------|
| <ul style="list-style-type: none"> • Plant management (material handling) • Configuration, data collection, and control on a single, high-speed network • Time-critical applications with no established schedule • Data sent regularly • Internet/Intranet connection • Close IT & Manufacturing Integration • Built-in switch, or high availability requirement (2-port AENTR) | EtherNet/IP | 1734-AENT 1734-AENTR |
| <ul style="list-style-type: none"> • High-speed transfer of time-critical data between controllers and I/O devices • Deterministic and repeatable data delivery • Media redundancy • Controller redundancy • Intrinsic safety | ControlNet | 1734-ACNR |
| <ul style="list-style-type: none"> • Connections of low-level devices directly to plant-floor controllers, without interfacing them • Data sent as needed • More diagnostics for improved data collection and fault detection • Less wiring and reduced start-up time than a traditional, hard-wired system • High noise resistance, and power over network | DeviceNet | 1734-ADN 1734-ADN(X) 1734-PDN |
| <ul style="list-style-type: none"> • Connecting to an existing PROFIBUS DP 5 m (16.4 ft) bus, 12 MB network | PROFIBUS | 1734-APB |

EtherNet I/P Network


The Ethernet Industrial (EtherNet/IP) network protocol is an open industrial-networking standard that supports both real-time I/O messaging and message exchange. It emerged due to the high demand for using the Ethernet network for control applications. The EtherNet/IP network uses off-the-shelf Ethernet communication chips and physical media. The EtherNet/IP network provides excellent drive and I/O control performance along with HMI information processing and many commercial technologies.

EtherNet/IP Network Considerations

| Adapter | Considerations |
|-------------------------|---|
| 1734-AENT 1734-AENTR | <p>A total of 63 POINT I/O modules can be assembled on a single EtherNet/IP node.</p> <p>Expansion power supplies may be used to provide additional POINTBus backplane current.</p> <p>Refer to the User Manual to determine the ratings for direct and rack connections allowed.</p> |

The 1734-AENT/1734-AENTR adapter supports direct-, rack-, and enhanced rack-optimized connections. A direct connection is a real-time data transfer link between the controller and whatever module occupies the slot that the configuration data references. Direct-connection messaging occurs at a cyclic rate specified by the requested packet interval (RPI) during configuration. A rack-optimized connection is a grouping of data from more than one digital I/O module into a single block of data sent over a single connection at the same data rate. Rack-optimized connections reduce the total number of connections needed to transfer data when using many digital I/O modules in a system.

Assume a system contains 8 digital I/O modules interfaced to a 1734-AENT/1734-AENTR adapter. If you used direct connections to transfer data to each of these modules, you need 8 connections — one to each of the 8 I/O modules. If you use a rack-optimized connection to transfer the data, you need only a single connection — the connection to the 1734-AENT/1734-AENTR adapter.

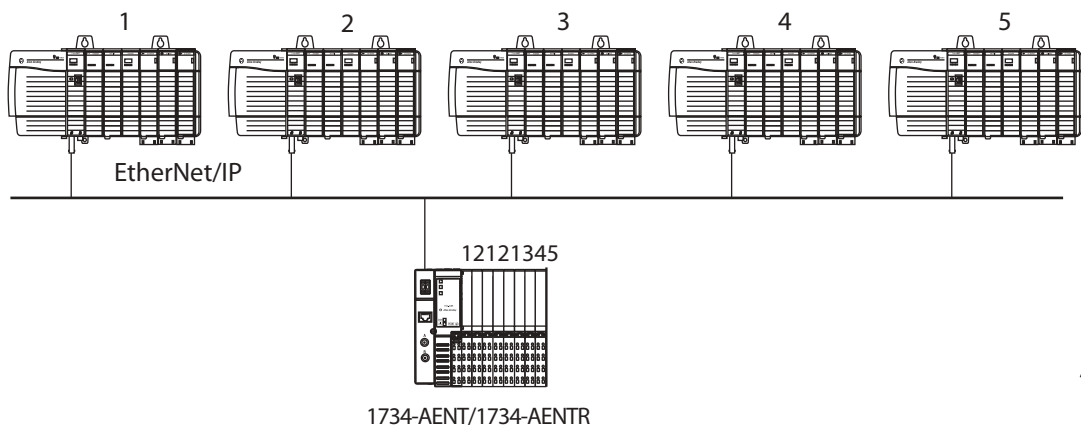

45102

1734-AENT/1734-AENTR Technical Specifications

| | 1734-AENT/1734-AENTR |
|-------------------------------|--|
| Input voltage, nom. | 24V DC |
| Input voltage range | 10...28.8V DC |
| Field side power requirements | 400 mA @ 24V DC (+20% = 28.8V DC) |
| Inrush current | 6 A for 10 ms |
| POINTBus current (mA) | 800 (1734-AENTR) 1000 (1734-AENT) |
| Power consumption @ 24V | 4.5 W |
| Power dissipation, max. | 2.8 W @ 28.8V |
| Input overvoltage protection | Reverse polarity protected |
| Interruption | Output voltage will stay within specifications when input drops out for 10 ms @ 10V with max load. |

ControlNet Network

The ControlNet network is an open, state-of-the-art control network that meets the demands of real-time, high-throughput applications. The ControlNet network uses the proven Common Industrial Protocol (CIP) to combine the functionality of an I/O network and a peer-to-peer network providing high-speed performance for both functions. The ControlNet

network gives you deterministic, repeatable transfers of all mission-critical control data in addition to supporting transfers of non-time-critical data.

ControlNet Network Considerations

| Adapter | Considerations |
|-----------|---|
| 1734-ACNR | <p>A total of 63 POINT I/O modules can be assembled on a single ControlNet node.</p> <p>Expansion power supplies may be used to provide additional POINTBus backplane current.</p> <p>Up to 25 direct connections and 5 rack connections are allowed.</p> |

The 1734-ACNR ControlNet adapter provides high-speed transfer of time critical data between controllers and I/O devices. It manages data transfers between controllers on the ControlNet network and POINT I/O modules plugged into the POINTBus backplane. The ControlNet network allows the exchange of messages between ControlNet products compliant with the ControlNet International specification. The 1734-ACNR adapter features include a variety of control system solutions, local communication network access through the network access port (NAP), and redundant media. It requires Series C POINT I/O modules or later.


The 1734-ACNR adapter requires a typical 24V DC power supply with a maximum of 10.2 W of power. It provides a maximum backplane current of 1.0 A at 5V DC. Backplane current can be extended beyond 1.0 A with a 1734-EP24DC backplane extension power supply. The 1734-EP24DC can supply up to an additional 1.3 A of backplane current. Multiple 1734-EP24DC power supplies can be used to reach the maximum limit of 63 POINT I/O modules if 25 or fewer of these modules are analog or specialty modules.

The adapter supports 25 direct and 5 rack I/O connections to the POINT I/O modules. From a single 1734-ACNR adapter, multiple controllers establish I/O connections, up to a maximum of 5 rack I/O connections per adapter. Direct connections must be used with analog and specialty modules. Multiple rack connections permit multiple controllers to connect to I/O over a single 1734-ACNR adapter. The number of connections that can be supported on a network depends on the ControlNet parameters (NUT, RPI, and API) and the POINT I/O configuration by itself (number and types of I/O modules).

The following example shows a single POINT I/O ControlNet adapter with 5 connections and 8 I/O modules. The POINT I/O modules are monitored by the 5 controllers on the ControlNet network. The POINT I/O modules in:

- slots 1, 3, and 5 are controlled by the first controller.
- slots 2 and 4 by the second controller.
- slot 6 by the third controller.
- slot 7 by the fourth controller.

- slot 8 by the fifth controller.

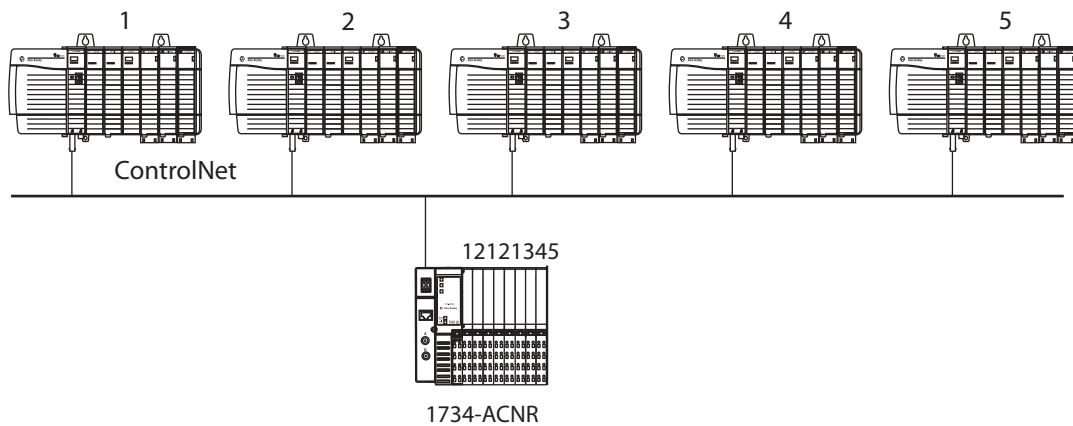

Memory Requirements

The 1734-ACNR adapter has 586 bytes of memory available for scheduled transmit data. When developing an application, the amount of data used by an individual connection must also include a small amount of overhead (I/O bytes per connection).

The following formula tracks the amount of available scheduled transmit data.

Available Memory = 586 - [(Number of connections * 10) + Sum of all connection sizes]

In the following example, the system uses a 1734-ACNR adapter with five 1734-232ASC modules.

| | Application Data Size (number of bytes) | Memory Required |
|------------------|--|-----------------|
| 1734-232ASC - 1 | 100 | 110 |
| 1734-232ASC - 2 | 88 | 98 |
| 1734-232ASC - 3 | 96 | 106 |
| 1734-232ASC - 4 | 96 | 106 |
| 1734-232ASC - 5 | 92 | 102 |
| Total Bytes Used | 472 | 522 |

In this example, a sixth module could be added if it used less than 54 bytes of application data. There are 64 bytes of memory left. $64 = 586 - [(5 * 10) + 472]$

For more information about the 1734-ACNR adapter, see the POINT I/O ControlNet Adapter User Manual, publication [1734-UM008](#).

1734-ACNR Technical Specifications

| | 1734-ACNR |
|-------------------------------|---|
| Input voltage, nom | 24V DC |
| Input voltage range | 10...28.8V DC |
| Field side power requirements | 425 mA @ 24V DC (+20% = 28.8V DC) |
| Inrush current | 6 A for 10 ms |
| POINTBus current | 1000 mA ⁽¹⁾ |
| Power consumption at 24V | 8.0 W |
| Power dissipation, max. | 2.8 W @ 28.8V |
| Input overvoltage protection | Reverse polarity protected |
| Interruption | Output voltage will stay within specifications when input drops out for 10 ms at 10V with max load. |

⁽¹⁾ 1000 mA @ 5V DC $\pm 5\%$ (4.75...5.25V).

DeviceNet Network

The DeviceNet network is an open low-level network that provides connections between simple industrial devices (such as sensors and actuators) and higher-level devices (such as PLC controllers and computers). The DeviceNet network uses the proven Common Industrial Protocol (CIP) to provide the control, configure, and data collection capabilities for industrial devices. The POINT I/O family offers four interfaces for connecting to the DeviceNet network.

DeviceNet Network Considerations

| Adapter | Consideration |
|----------------|--|
| 1734-ADN | <ul style="list-style-type: none"> • All POINT I/O modules count as a single node on the main network. A total of 63 POINT I/O modules can be assembled on a single DeviceNet node. • Behaves as a slave device on the main network and a master on the POINTBus backplane. • RSNetWorx for DeviceNet software is needed for configuration of the 1734-ADN adapter on the main network and the POINTBus backplane • Expansion power supplies may be used to provide additional POINTBus backplane current. |

DeviceNet Network Considerations

| Adapter | Consideration |
|----------------|---|
| 1734-ADNX | <ul style="list-style-type: none"> • Acts like a 1734-ADN adapter, with additional capabilities. • All POINT I/O modules, and some third-party field devices, count as a single node on the main network. • Has a second, Phoenix-style connector that extends the subnet off the module, so that any DeviceNet-capable device could be connected to a subnet and scanned by the 1734-ADNX adapter. • Network on the second connector is electrically isolated from the main network and can be used to extend the total DeviceNet trunk line distance.⁽¹⁾ • Node numbers of the devices on the POINTBus backplane and subnet would not count against the 63 slave nodes allowed on the main network. • Devices on the subnet and the main network need to be connected at different communication rates or use different sampling methods (for example, change-of-state or polled). • Data from these devices would be included in the data being sent to/from the 1734-ADNX adapter on the main network. • POINT I/O expansion power supplies are permitted and may be required to add more modules. |
| 1734-PDN | <ul style="list-style-type: none"> • Each POINT I/O module on the main network counts as a separate node. • Electrically connects the main network to the I/O modules, which are connected on the POINTBus backplane. • No configuration to the 1734-PDN communication interface necessary since it is transparent to the main network. • Total POINTBus backplane current of I/O modules cannot exceed 1.3 A. • Expansion power supplies may not be used. |

⁽¹⁾ For example: with thick round media at 125 Kbps, you could run a maximum of 500 m (1640 ft) to a 1734-ADNX adapter on the main network. You could then wire an additional 500 m (1640 ft) of cable on the subnet connector and double the distance of the network. **Remember that this subnet needs terminating resistors and a 24V DC power connection, the same as any other DeviceNet network.**

It is important that the total amount of data coming from the subnet does not exceed the data capability of either the 1734-ADN or 1734-ADNX adapter.

- 250 bytes (248 data + 2 bytes command info) for output data (used as either COS, cyclic, or poll)
- 250 bytes (248 data + 2 bytes status info) for polled input data
- 250 bytes (248 data + 2 bytes status info) for COS/cyclic input data
- 8 bytes (6 data + 2 status info) for strobe input data

The data coming through the 1734 adapter combined with the other data from the main network cannot exceed the data capability of the main network master scanner. If this occurs, you will need multiple master scanners on the main network and the I/O modules on the subnet will need to be split between multiple 1734-ADN or 1734-ADNX adapters.

With the 1734-PDN communication interface, the multiple masters on the main network will be able to communicate to separate groups of modules on its subnet through the same 1734-PDN communication interface, so no additional adapter would be necessary.

1734 DeviceNet Adapter Specifications

| Attribute | 1734-PDN | 1734-ADN/X |
|-------------------------------|-------------------------------------|---|
| Input voltage, nom | 24V DC | |
| Input voltage range | 11...25V DC DeviceNet specification | 10...28.8V DC |
| Field side power requirements | 400 mA @ 24V DC (+4% = 25V DC) | 400 mA @ 24V DC (+20% = 28.8V DC) |
| Inrush current | 6 A for 5 ms | 6 A for 10 ms |
| POINTBus current | 1300 ⁽¹⁾ mA | 1000 mA |
| Power consumption @ 24V | 8.0 W | 8.1 W |
| Power dissipation, max. | 1.2 W @ 25V | 2.8 W @ 28.8V |
| Input overvoltage protection | Reverse polarity protected | |
| Interruption | — | Output voltage will stay within specifications when input drops out for 10 ms @ 10 V with max load. |

⁽¹⁾ 1300 mA @ 5V DC $\pm 5\%$ (4.75...5.25V).

PROFIBUS DP Network

PROFIBUS for Decentralized Peripherals is a standard in field bus communication in automation. that helps eliminate hard wiring, and reduces costs associated with design and installation.

PROFIBUS DP Network Considerations

| Adapter | Considerations |
|----------|---|
| 1734-APB | <p>A total of 63 POINT I/O modules can be assembled on a single PROFIBUS DP node.</p> <p>Expansion power supplies may be used to provide additional POINTBus backplane current.</p> |

Other considerations when using the APB adapter. Example, if needed (see EtherNet/IP section).

1734-APB Technical Specifications

| Attribute | Value |
|-------------------------------|-----------------------------------|
| Input voltage, nom | 24V DC |
| Input voltage range | 10...28.8V DC |
| Field side power requirements | 400 mA @ 24V DC (+20% = 28.8V DC) |
| Inrush current | 6 A for 10 ms |

1734-APB Technical Specifications

| Attribute | Value |
|------------------------------|--|
| POINTBus current | 1000 mA ⁽¹⁾ |
| Power consumption at 24V | 8.0 W |
| Power dissipation, max. | 2.8 W @ 28.8V |
| Input overvoltage protection | Reverse polarity protected |
| Interruption | Output voltage will stay within specifications when input drops out for 10 ms @ 10V with max load. |

⁽¹⁾ 1000 mA @ 5V DC $\pm 5\%$ (4.75...5.25V).

Communication Adapter Environmental Specifications

| Attribute | Value |
|---|---|
| Operating temperature | -20...55° C (-4...131° F) |
| Nonoperating temperature | -40...85° C (-40...185° F) |
| Relative humidity | 5...95% noncondensing |
| Operating shock | 30 g |
| Nonoperating shock | 50 g |
| Vibration | 5 g @ 10...500Hz |
| Enclosure type rating | None (open-style) |
| Mounting | DIN Rail |
| Certifications (when product is marked) | c-UL-us, Ex, CE, C-Tick, CI / EtherNet/IP / DeviceNet |

Select POINT I/O Modules

Step 2 - Select:

- I/O modules – some modules have diagnostic features, electronic fusing, or individually isolated inputs/outputs

| | |
|---|---------|
| Digital I/O Modules..... | page 20 |
| Analog and Temperature I/O Modules..... | page 26 |
| Specialty I/O Modules | page 32 |
| Counter Modules..... | page 38 |
| Safety I/O Modules | page 41 |
| POINT I/O Accessories | page 48 |

Select POINT I/O Modules

The POINT I/O family provides a wide range of input and output modules to span many applications, from high-speed digital to process control. POINT I/O modules support producer/consumer technology, which allows input information and output status to be shared among multiple Logix controllers.



Each POINT I/O module mounts adjacent to the network adapter or another I/O module and removable terminal block (RTB) to connect all field-side wiring. The RTBs are part of the terminal base assembly. They are not included with the I/O modules and must be ordered separately.

The POINT family of I/O modules includes:

- 1734 digital I/O modules.
- 1734 analog I/O modules.
- 1734 specialty I/O modules.
- 1734 wiring systems.
- 1734 network communication adapters.
- 1734 POINT Guard I/O modules.

Digital I/O Modules

Choose digital I/O modules when you need:

- a wide variety of voltage interface capabilities
- isolated and non-isolated module types
- point-level output fault states
- choice of direct-connect or rack-optimized communications
- field-side diagnostics (on select modules)

Most output modules have built-in surge suppression to reduce the effects of high-voltage transients. However, we recommend that you use an additional suppression device if an output is being used to control inductive devices, such as:

- relays
- motor starters
- solenoids
- motors

Additional suppression is especially important if your inductive device is in series with or parallel to hard contacts, such as push buttons or selector switches.

Digital AC Input Modules

1734 Digital AC Input Modules Technical Specifications

| | 1734-IA2 | 1734-IA4 | 1734-IM2 | 1734-IM4 |
|-------------------------------|---|------------------|-------------------------|------------------|
| Number of inputs | 2 (1 group of 2) | 2 (1 group of 4) | 2 (1 group of 2) | 2 (1 group of 4) |
| Voltage, on-state input, nom | 120V AC | | 220V AC | |
| Voltage, on-state input, min | 65V AC | | 159V AC | |
| Voltage, on-state input, max | 132V AC | | 264V AC | |
| Input delay time, on to off | 20 ms hardware filter plus 0...65 ms digital filter programmable in increments of 1 ms ⁽¹⁾ | | | |
| Current, on-state input, min | 4.0 mA @ 65V AC, 60 Hz | | 6.2 mA @ 159V AC, 60 Hz | |
| Input impedance, nom | 10.6 kΩ | | 22.3 kΩ | |
| Current, off-state input, max | 2.7 mA @ 43V AC | | 2.9 mA | |
| POINTBus current | 75 mA @ 5V DC | | | |
| Power dissipation, max | 0.1 W @ 132V AC | | | |
| Thermal dissipation, max | 3.4 BTU @ 132V AC | | | |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | | | |

⁽¹⁾ Input ON-to-OFF delay time is the time from a valid input signal to recognition by the module.

Digital AC Output Modules

1734 Digital AC Output Modules Technical Specifications

| | 1734-OA2 | 1734-OA4 |
|-------------------------------|---|---|
| Number of outputs | 2 | 4 |
| Voltage, on-state output, nom | 120V AC; 220V AC | |
| Voltage, on-state output, min | 74V AC | |
| Voltage, on-state output, max | 264V AC | |
| Output current rating | 1.5 A (2 channels @ 0.75 A each) | 2.0 A (750 mA per output, 2.0 A max per module) |
| POINTBus current | 75 mA @ 5V DC | |
| Power dissipation, max | 2 W @ 264V AC | 3.5 W @ 264V AC |
| Thermal dissipation, max | 6.8 BTU @ 264V AC | 11.69 BTU @ 264V AC |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | |

Digital DC Input Modules

1734 Digital DC Input Modules Technical Specifications

| | 1734-IB2 | 1734-IB4 | 1734-IB4D | 1734-IB8 | 1734-IV2 | 1734-IV4 | 1734-IV8 |
|-------------------------------|---|-----------------------|-----------------------|-----------------------|-------------------------------|-----------------------|-----------------------|
| | Sinking Input Modules | | | | Sourcing Input Modules | | |
| Number of inputs | 2 | 4 | 4 | 8 | 2 | 4 | 8 |
| Diagnostics | — | — | Yes | — | — | — | — |
| Voltage, on-state input, nom | 24V DC | | | | | | |
| Voltage, on-state input, min | 10V DC | | | | | | |
| Voltage, on-state input, max | 28.8V DC | | | | | | |
| Input delay time, on to off | 0.5 ms hardware + (0...65 ms selectable) ⁽¹⁾ | | | | | | |
| Current, on-state input, min | 2 mA | | | | | | |
| Current, on-state input, max | 5 mA | | | | | | |
| Current, off-state input, max | 1.5 mA | | | | | | |
| POINTBus current (mA) | 75 mA max @ 5V DC | | 50 mA max @ 5V DC | 75 mA max @ 5V DC | | | |
| Power dissipation, max | 0.7 W @ 28.8V DC | 1.0 W @ 28.8V DC | 0.6 W max @ 28.8V DC | 1.6 W @ 28.8V DC | 0.7 W @ 28.8V DC | 1.0 W @ 28.8V DC | 1.6 W @ 28.8V DC |
| Thermal dissipation, max | 2.4 BTU/hr @ 28.8V DC | 3.4 BTU/hr @ 28.8V DC | 1.9 BTU/hr @ 28.8V DC | 5.5 BTU/hr @ 28.8V DC | 2.4 BTU/hr @ 28.8V DC | 3.4 BTU/hr @ 28.8V DC | 5.5 BTU/hr @ 28.8V DC |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | | | | | | |

⁽¹⁾ Input ON-to-OFF delay time is the time from a valid input signal to recognition by the module.

Digital DC Output Modules

1734 Digital DC Output Modules Technical Specifications

| | 1734-OB2 ⁽¹⁾ | 1734-OB2E | 1734-OB2EP | 1734-OB4 ⁽¹⁾ | 1734-OB4E | 1734-OB8 ⁽¹⁾ | 1734-OB8E | 1734-OV2E | 1734-OV4E | 1734-OV8E |
|-------------------------------|--------------------------------|-----------|------------|-------------------------|-----------|-------------------------|-----------|-------------------------------|-----------|-----------|
| | Sourcing Output Modules | | | | | | | Sinking Output Modules | | |
| Number of outputs | 2 | | | 4 | 4 | 8 | | 2 | 4 | 8 |
| Diagnostics | — | Yes | Yes | — | Yes | — | Yes | Yes | Yes | Yes |
| Electronically protected | Yes | | | | | | | | | |
| Voltage, on-state output, nom | 24V DC | | | | | | | | | |
| Voltage, on-state output, min | 10V DC | | | | | | | | | |

1734 Digital DC Output Modules Technical Specifications

| | 1734-OB2 ⁽¹⁾ | 1734-OB2E | 1734-OB2EP | 1734-OB4 ⁽¹⁾ | 1734-OB4E | 1734-OB8 ⁽¹⁾ | 1734-OB8E | 1734-0V2E | 1734-0V4E | 1734-0V8E |
|-------------------------------|---|-----------|-------------------------------------|-------------------------------------|-----------|-------------------------|-----------|--|------------------------------------|-------------------------------------|
| Voltage, on-state output, max | 28.8V DC | | | | | | | | | |
| Output current rating, max | 2.0 A per module, 1.0 A per channel | | 4.0 A per module, 2.0 A per channel | 3.0 A per module, 1.0 A per channel | | | | 2.0 A max per module, 1.0 A per output | 3.0 A per module, 1.0 A per output | 3.0 A per module, 1.0 A per channel |
| POINTBus current (mA) | 75 | | | | | | | | | |
| Power dissipation, max | 0.8 W @ 28.8V DC | | 3.4 W @ 28.8V DC | 1.2 W @ 28.8V DC | | 2.0 W @ 28.8V DC | | 0.8 W max @ 28.8V DC | 1.2 W max @ 28.8V DC | 2.0 W max @ 28.8V DC |
| Thermal dissipation, max | 2.7 BTU/hr @ 28.8V DC | | 11.6 BTU/hr @ 28.8V DC | 4.1 BTU/hr @ 28.8V DC | | 6.8 BTU/hr @ 28.8V DC | | 2.7 BTU/hr @ 28.8V DC | 4.1 BTU/hr @ 28.8V DC | 6.8 BTU/hr @ 28.8V DC |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | | | | | | | | | |

⁽¹⁾ Non-diagnostic, standard output modules.

Digital Contact Modules

1734 Digital Contact Modules Technical Specifications

| | 1734-0W2 | 1734-0W4 | 1734-0X2 |
|--|---|-----------------|---|
| Number of outputs | 2 N.O. relays | 4 N.O. relays | 2 Form C (N.O./N.C.) relays, isolated |
| Output delay time, on to off, max | 26 ms ⁽¹⁾ | | 10 ms ⁽¹⁾ |
| Contact resistance, initial | 30 mΩ | | |
| Leakage current, off-state output, max | 1.2 mA and bleed resistor through snubber circuit @ 240V AC | | 1.2 mA and bleed resistor through snubber circuit @ 240V AC |
| POINTBus current (mA) | 80 | | 100 |
| Power dissipation, max | 0.5 W | | |
| Thermal dissipation, max | 1.7 BTU/hr | | |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | | |

⁽¹⁾ Time from valid output off signal to relay deenergization by module.

Digital I/O Modules Environmental Specifications

1734 Digital I/O Modules Environmental Specifications

| Attribute | Value |
|---|----------------------------|
| Operating temperature | -20...55 °C (-4...131 °F) |
| Nonoperating temperature | -40...85 °C (-40...185 °F) |
| Relative humidity | 5...95% noncondensing |
| Operating shock | 30 g |
| Nonoperating shock | 50 g |
| Vibration | 5 g at 10...500 Hz |
| Enclosure type rating | None (open-style) |
| Mounting type | DIN-rail |
| Certifications (when product is marked) | CE, C-Tick, c-UL-us |

Self-Configurable Modules

1734 DC Configurable Input/Output Modules Technical Specifications

| | 1734-8CFG | 1734-8CFGDLX (with DeviceLogix) |
|-------------------------------|---|---------------------------------|
| Number of inputs/iutputs | 8 | 8 |
| Voltage, on-state input, nom | | |
| Voltage, on-state input, min | 11V DC | |
| Voltage, on-state input, max | | |
| Current, on-state input, min | 2.0 mA | |
| Current, on-state input, max | 5.0 mA | |
| Input filter | Each input independently settable in 1 ms intervals (truncated to 1 ms resolution). Default value is 1000 ms. | |
| Voltage, on-state output, nom | 24V DC | |
| Voltage, on-state output, min | 10V DC | |
| Voltage, on-state output, max | 28.8V DC | |
| POINTBus current | 100 mA @ 5V DC | |
| Power dissipation, max | 2.6 W @ 28.8V DC | |
| Thermal dissipation, max | 8.9 BTU/hr @ 28.8V DC | |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | |

Self-Configurable Modules Environmental Specifications

1734 DC Configurable Input/Output Modules Environmental Specifications

| Attribute | Value |
|---|----------------------------|
| Operating temperature | -20...55 °C (-4...131 °F) |
| Nonoperating temperature | -40...85 °C (-40...185 °F) |
| Relative humidity | 5...95% noncondensing |
| Operating shock | 30 g |
| Nonoperating shock | 50 g |
| Vibration | 5 g at 10...500 Hz |
| Enclosure type rating | None (open-style) |
| Mounting type | DIN-rail |
| Certifications (when product is marked) | CE, C-Tick |

Analog and Temperature I/O Modules

The POINT I/O analog and temperature I/O modules support: on-board, channel-level data alarming (four set-points per channel); scaling to engineering units; channel-level diagnostics (electronic bits and LED indicators); and integer format.

Analog and temperature input modules support the following configurable parameters and diagnostics:

- open-wire detection with LED and electronic reporting
- four-alarm and annunciation set-points: low alarm; high alarm; low/low alarm; high/high alarm calibration mode detection and electronic reporting
- underrange detection and electronic reporting
- overrange detection and electronic reporting
- channel signal range and on-board scaling (scaling to any 16-bit integer under-/over-range alarms)
- filter type (notch for A/D, or first-order low-pass digital filter)
- temperature scale (Celsius, Fahrenheit, Kelvin, Rankine, or custom)
- channel update rate (step response plus 0...10,000 ms filter setting)

Choose analog or temperature I/O modules when you need:

- On-board scaling eliminates the need to scale the data in the controller, preserving controller processing time and power for more important tasks, such as I/O control, communications, or other user-driven functions.
- Over- and underrange detections and indications eliminate the need to test values in the control program, saving valuable processing power of the controller.
- Ability to individually configure each channel of the output module to hold its last value or assume a user-defined value on a fault condition.
- Ability to individually enable and disable channels improves module performance.
- Selectable input filters lets you select from several different filter frequencies for each channel that best meets the performance needs of your application based on environmental limitations
- Selectable response to broken input sensor feature provides feedback to the controller that a field device is not connected or operating properly. This lets you specify corrective action based on the bit or channel condition.
- The modules share a high accuracy rating of $\pm 0.1\%$ of full-scale accuracy at 25 °C (77 °F).

Analog Input Modules

1734 Analog Input Modules Technical Specifications

| | 1734-IE2C | 1734-IE2V | 1734-IE4C | 1734-IE8C |
|-------------------------------|---|--|---|------------------------|
| Number of inputs | 2 | | 4 | 8 |
| Input signal range | 4...20 mA 0...20 mA | 0...10V ±10V | 4...20 mA 0...20 mA | 4...20 mA 0...20 mA |
| Input resolution | 16 bits - over 21 mA 0.32 µA/cnt | 15 bits plus sign 320 µV/cnt in unipolar or bipolar mode | 16 bits - 0...21 mA 0.32 µA/cnt | |
| Data format | Signed integer | | | |
| Accuracy | Current Input: 0.1% Full Scale @ 25 °C ⁽¹⁾ | Voltage Input: 0.1% Full Scale @ 25 °C ⁽¹⁾ | Current Input: 0.1% Full Scale @ 25 °C ⁽¹⁾ | |
| Accuracy drift w/temp. | Current Input: 30 ppm/°C | 5 ppm/°C | 30 ppm/°C | |
| Step response, per channel | 70 ms @ Notch = 60 Hz (default) 80 ms @ Notch = 50 Hz 16 ms @ Notch = 250 Hz 8 ms @ Notch = 500 Hz | | 50 ms @ Notch = 60 Hz (default) 60 ms @ Notch = 50 Hz 30 ms @ Notch = 100 Hz 25 ms @ Notch = 120 Hz 15 ms @ Notch = 200 Hz 12.5 ms @ Notch = 240 Hz 10 ms @ Notch = 300 Hz 7.5 ms @ Notch = 400 Hz 6.25 ms @ Notch = 480 Hz | |
| Input conversion type | Delta Sigma | | Sigma Delta | |
| POINTBus current | 75 mA @ 5V DC | | | |
| Power dissipation, max | 0.6 W @ 28.8V DC | 0.75 W @ 28.8V DC | 0.6 W @ 28.8V DC | |
| Thermal dissipation, max | 2.0 BTU/hr @ 28.8V DC | 2.5 BTU/hr @ 28.8V DC | 2.0 BTU/hr @ 28.8V DC | |
| Keyswitch position | 3 | | | |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | | | |

⁽¹⁾ Includes offset, gain, non-linearity and repeatability error terms.

Temperature Input Modules

POINT I/O temperature modules can detect and communicate these electronic conditions:

| | |
|--|---|
| Overrange alarm | <ul style="list-style-type: none"> The channel overrange alarm is set if the input is greater than the maximum temperature (thermocouple or RTD range dependent), millivolt (+75V) or resistance (600 Ω) range value, or above the maximum range of the thermocouple or RTD. The cold-junction compensator has its own over-range alarm. If the CJC temperature goes above 70 °C (158 °F), the over-range alarm is set. |
| Underrange alarm | <ul style="list-style-type: none"> The channel underrange alarm is set if the input is less than the minimum temperature (thermocouple or RTD range dependent), millivolt (-75 mV) or resistance (10 Ω) range value, or below the minimum range of the thermocouple or RTD. The cold-junction compensator has its own underrange alarm. If the CJC temperature goes below 0 °C (32 °F), the under-range alarm is set. |
| Level alarm (low-low, low, high, high-high) | <ul style="list-style-type: none"> When the channel input goes below a low alarm or above a high alarm, a bit is set in the data table. All alarm status bits can be read individually or by reading the channel status byte (bits 2...5 for channel 0; bits 10...13 for channel 1). Each channel alarm can be configured individually. |
| Open-wire alarm | <ul style="list-style-type: none"> The module has the ability to check for a broken or detached wire. In any mode, if a broken/detached lead is detected, the data value is forced to maximum and the over-range alarm is set. Once the alarm is issued, it remains active as long as the input signal is faulted. |

Cold-junction Compensation (1734-IT2I only)

When using thermocouples, cold-junction compensation is required at the termination of the thermocouple wire. Cold-junction can be accomplished in three ways:

- Enter an estimated temperature
- Use a 1734-TBCJC mounting base (recommended)
- Use external cold-junction compensators

Entering an estimated temperature is the least accurate way for cold-junction compensation. Using external compensators is the most expensive way, while using the 1734-TBCJC provides the easiest and most accurate method.

An open cold-junction compensator causes the input point to the maximum temperature value for the selected input type. This causes an alarm to be set. Once the alarm is issued, it remains active as long as the input signal is faulted (above maximum).

Set the cold-junction enable bit on the 1734-IT2I module to enable or disable the cold-junction linearization. If enabled, the proper cold-junction compensation value is applied to the selected thermocouple. If disabled, the data (CJ temperature) is still available but is not applied to the input. If the 1734-TBCJC is not available, this parameter should be set to disabled. A cold-junction value can be added using the cold-junction offset parameter.

Noise Filtering (1734-IR2)

You can select the type and amount of noise filtering on each individual channel.

- Notch filter of analog to digital converter
- First-order, low-pass digital filter

Choose the filter that provides you with the update and step response that most closely matches your system requirements.

1734 Analog Temperature Input Modules Technical Specifications

| | 1734-IR2 | 1734-IR2E | 1734-IT2I |
|----------------------------------|---|--|--|
| Number of inputs | 2 RTD | 2 high resolution RTD | 2 thermocouple |
| Input signal range | 0...600 Ω | 0...220 Ω | ± 75 mV |
| Input resolution | 16 bits 9.5 m Ω /cnt 0.03 $^{\circ}\text{C}$ /cnt (pt 385 @ 25 $^{\circ}\text{C}$) | 16 bits 2.4 m Ω /cnt 0.006 $^{\circ}\text{C}$ /cnt (Pt385 @ 25 $^{\circ}\text{C}$) | 15 bits + sign 2.5 mV/cnt ⁽¹⁾ |
| Data format | Signed integer | | |
| Thermocouple resolution | — Type B, 30...1820 $^{\circ}\text{C}$ (86...3308 $^{\circ}\text{F}$) 3 counts/ $^{\circ}\text{C}$ Type C, 0...2315 $^{\circ}\text{C}$ (32...4199 $^{\circ}\text{F}$) 6 counts/ $^{\circ}\text{C}$ Type E, -270...1000 $^{\circ}\text{C}$ (-454...1832 $^{\circ}\text{F}$) 24 counts/ $^{\circ}\text{C}$ Type J, -210...1200 $^{\circ}\text{C}$ (-454...2192 $^{\circ}\text{F}$) 21 counts/ $^{\circ}\text{C}$ Type K, -270...1372 $^{\circ}\text{C}$ (-454...2502 $^{\circ}\text{F}$) 13 counts/ $^{\circ}\text{C}$ Type N, -270...1300 $^{\circ}\text{C}$ (-454...2373 $^{\circ}\text{F}$) 11 counts/ $^{\circ}\text{C}$ Type R, -50...1768.1 $^{\circ}\text{C}$ (-58...3214 $^{\circ}\text{F}$) 4 counts/ $^{\circ}\text{C}$ Type S, -50...1768.1 $^{\circ}\text{C}$ (-58...3214 $^{\circ}\text{F}$) 4 counts/ $^{\circ}\text{C}$ Type T, -270...400 $^{\circ}\text{C}$ (-454...752 $^{\circ}\text{F}$) 15 counts/ $^{\circ}\text{C}$ | | |
| Cold junction compensation | — | | Included in 1734-RTBCJC Remote Termination Block |
| Cold junction compensation range | — | | 0...70 $^{\circ}\text{C}$ |

1734 Analog Temperature Input Modules Technical Specifications

| | 1734-IR2 | 1734-IR2E | 1734-IT2I |
|----------------------------------|---|------------------|--|
| Accuracy | Current Input: 0.1% Full Scale @ 25 °C Voltage Input: 0.1% Full Scale @ 25 °C | | |
| Input update rate, per module | 20 ms @ Notch = 50 Hz 17 ms @ Notch = 60 Hz (default) 10 ms @ Notch = 100 Hz 8 ms @ Notch = 120 Hz 5 ms @ Notch = 200 Hz 4 ms @ Notch = 240 Hz 3 ms @ Notch = 300 Hz 3 ms @ Notch = 400 Hz 2 ms @ Notch = 480 Hz | | |
| Step response, per channel | 60 ms @ Notch = 50 Hz 50 ms @ Notch = 60 Hz 30 ms @ Notch = 100 Hz 25 ms @ Notch = 120 Hz 15 ms @ Notch = 200 Hz 13 ms @ Notch = 240 Hz 10 ms @ Notch = 300 Hz 8 ms @ Notch = 400 Hz 6 ms @ Notch = 480 Hz | | |
| Input impedance | — | | 100 k Ω |
| Input resistance | — | | 1 M Ω |
| Input conversion type | Delta Sigma | | |
| Common mode rejection ratio | 120 dB | | |
| Normal mode rejection ratio | -100 dB, -3 dB Notch filter: 13.1 Hz @ Notch = 50 Hz 15.7 Hz @ Notch = 60 Hz 26.2 Hz @ Notch = 100 Hz 31.4 Hz @ Notch = 120 Hz 52.4 Hz @ Notch = 200 Hz 62.9 Hz @ Notch = 240 Hz 78.6 Hz @ Notch = 300 Hz 104.8 Hz @ Notch = 400 Hz 125.7 Hz @ Notch = 380 Hz | | -60 dB, -3 dB Notch filter: 13.1 Hz @ Notch = 50 Hz 15.7 Hz @ Notch = 60 Hz 26.2 Hz @ Notch = 100 Hz 31.4 Hz @ Notch = 120 Hz 52.4 Hz @ Notch = 200 Hz 62.9 Hz @ Notch = 240 Hz 78.6 Hz @ Notch = 300 Hz 104.8 Hz @ Notch = 400 Hz 125.7 Hz @ Notch = 380 Hz |
| Overvoltage protection, inputs | No input protection | | Input not overvoltage protected |
| Input calibration | Factory calibrated | | |
| POINTBus current | 220 mA @ 5V DC | | 175 mA @ 5V DC |
| Power dissipation, max | 1.0 W | | |
| Thermal dissipation, max | 3.3 BTU/hr | | |
| Isolation voltage | 50V (continuous), Basic Insulation Type Type tested at 2200V DC for 60 s, I/O to system | | |
| External DC supply voltage, nom | 24V DC | | — |
| External DC supply voltage range | 10...28.8V DC | | — |

1734 Analog Temperature Input Modules Technical Specifications

| | 1734-IR2 | 1734-IR2E | 1734-IT2I |
|---------------------------------|---|------------------|------------------|
| External DC supply current, nom | 15 mA @ 24V DC | | — |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | | 1734-TBCJC |
| Keyswitch position | 6 | | |

⁽¹⁾ Includes offset, gain, non-linearity and repeatability error terms.

Analog Output Modules**1734 Analog Output Modules Technical Specifications**

| | 1734-OE2C | 1734-OE2V | 1734-OE4C |
|------------------------------------|--|---|---|
| Number of outputs | 2 | | 4 |
| Output signal range | 4...20 mA 0...20 mA | 0...10V ±10V | 4...20 mA 0...20 mA |
| Output resolution | 13 bits - over 0...21 mA 2.5 µA/cnt | 14 bits (13 plus sign) 1.28 mV/cnt in unipolar or bipolar mode | 16 bits - over 0...21 mA 2.5 µA/cnt |
| Data format | Signed integer | | |
| Accuracy | Current output: 0.1% Full Scale @ 25 °C ⁽¹⁾ | Voltage output: 0.1% Full Scale @ 25 °C ⁽¹⁾ | Current output: 0.1% Full Scale @ 25 °C ⁽¹⁾ |
| Accuracy drift w/temp. | Current output: 30 ppm/°C | Voltage output: 5 ppm/°C | Current output: <50 ppm/°C |
| Step response to 63% of FS, output | Current output: 24 µs | Voltage output: 20 µs | Current output: 40 µs |
| Output conversion rate | 16 µs | 20 µs | 1 µs |
| POINTBus current | 75 mA @ 5V DC | | |
| Power dissipation, max | 750 Ω load on each output - 1.23W 0 Ω load on each output - 1.83W | 1.0W | 750 Ω load on each output - 1.86W 0 Ω load on each channel - 2.15W |
| Thermal dissipation, max | 750 Ω load on each output - 4.19 BTU/hr 0 Ω load on each output - 6.24 BTU/hr | 3.4 BTU/hr | 750 Ω load on each output - 6.34 BTU/hr 0 Ω load on each channel - 7.33 BTU/hr |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | | |
| Keyswitch position | 4 | | |

⁽¹⁾ Includes offset, gain, non-linearity and repeatability error terms.

Analog and Temperature I/O Modules Environmental Specifications

1734 Analog and Temperature I/O Modules Environmental Specifications

| Attribute | Value |
|---|----------------------------|
| Operating temperature | -20...55 °C (-4...131 °F) |
| Nonoperating temperature | -40...85 °C (-40...185 °F) |
| Relative humidity | 5...95% noncondensing |
| Operating shock | 30 g |
| Nonoperating shock | 50 g |
| Vibration | 5 g @ 10...500 Hz |
| Enclosure type rating | None (open-style) |
| Mounting type | DIN Rail |
| Certifications (when product is marked) | c-UL-us, CE, C-Tick, Ex |

Specialty I/O Modules

1734-232ASC and 1734-485ASC Serial Interface Modules

The 1734-232ASC and 1734-485ASC serial interface modules offer a serial-link communication interface solution for peripheral products with RS-232 (use the 1734-232ASC), RS-485, and RS-422 ports (use the 1734-485ASC). These modules allow a device with serial-interface output (for example, bar code readers) to communicate up to 128 bytes of ASCII data onto any network supported by the POINT I/O system. Each module is a single-channel, full-duplex interface and is rated for up to 38.4 Kbps. LED indicators on the modules offer diagnostics for the module, POINTBus backplane, and transmit/receive status indication.

1734 Serial Interface Modules Technical Specifications

| | 1734-232ASC, 1734-485ASC |
|---------------------------|--|
| Number of serial channels | 1 |
| POINTBus current (mA) | 75 |
| Power dissipation | 0.75 W @ 28.8V DC |
| Thermal dissipation | 2.5 BTU/hr max @ 28.8V DC |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS |
| Keyswitch position | 2 (specialty) |
| Serial port parameters | |
| Serial character framing | 7N2, 7E1, 7O1, 8N1, 8N2, 8E1, 8O1, 7E2, 7O2 |
| Serial port comm speed | 9600 bps, 1200 bps, 2400 bps, 4800 bps, 19.2 kbps, 38.4 kbps |

1734 Serial Interface Modules Technical Specifications

| | 1734-232ASC, 1734-485ASC |
|--|---|
| Serial port receive from ASCII device | |
| Number of receive chars, max | 1...128 |
| ReceiverRecord start mode | No, exclude, include start delimiter |
| Receive start delimiter | ASCII character |
| Receive record end mode | No, exclude, include end delimiter |
| Receive end delimiter | ASCII character |
| Send (produce) on DeviceNet to Master | |
| Receive string data type | Array, short_string, string |
| Pad mode | Pad mode disabled, enabled |
| Pad character | ASCII character |
| Receive swap mode | Disabled, 16-bit, 24-bit, 32-bit swap |
| DeviceNet handshake mode | Master/slave handshake, produce immediate |
| Produce assembly size | 4...132 |
| Serial data size | 0...128 bytes |
| Receive transaction ID | 0...255 |
| Serial port transmit to ASCII device | |
| Number of transmit chars, max | 1...128 |
| Transmit end delimiter mode | No, exclude, include end delimiter |
| Transmit end delimiter character | ASCII character |
| Consume on DeviceNet from Master | |
| Consume string data type | Array, short_string, string |
| Transmit swap mode | Disabled, 16-bit, 24-bit, 32-bit swap |
| DeviceNet record header mode | Transmit handshake/immediate |
| Consume assembly size | 4...132 |
| Serial port transmit/explicit messages from configuration tool | |
| Transmit serial data string size | 0...128 bytes |
| Transmitted serial data length | 0...128 bytes |
| Transmit transaction ID | 0...255 |
| Status | TX FIFO overflow, RX FIFO overflow, RX parity error, handshake error, new data flag |

1734-SSI Synchronous Serial Interface Module with Absolute Encoder

The 1734-SSI module collects serial data from industrial absolute-position encoding sensors that use standard SSI protocol. The SSI module is inserted

into a POINT I/O terminal base that provides common power, communications, and wiring connections for the SSI sensors.

1734-SSI Module Technical Specifications

| | 1734-SSI |
|--|---|
| Number of SSI channels | 1 |
| POINTBus current | 110 mA |
| Power dissipation, max | 0.94 W |
| Thermal dissipation, max | — |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS |
| Keyswitch position | 2 |
| Isolation voltage | 50V (continuous), Basic Insulation Type Type tested at 1250V AC for 60 s, field side to system |
| External DC supply voltage, nom | 10...28.8V DC |
| Encoder type | Any absolute encoder supporting standard SSI protocol including linear, rotary, and optical distance measuring devices |
| SSI data rate | 125 kHz, 250 kHz, 500 kHz, 1 MHz, 2 MHz (software selectable) |
| SSI bits per word | 2...31 (software selectable) |
| SSI word length | 4 bytes (32 bits) |
| SSI word delay time | 16 μ s...64 ms (software selectable) ⁽¹⁾ |
| SSI features | Gray or binary code capable with gray to binary conversion, increasing or decreasing SSI count indication, 2 SSI word comparator values, SSI word latching with I1 input |
| SSI cable type | UL CM/AWM 2464/CSA Type CMG FT4 or similar cable utilizing shielded twisted pairs for D \pm and C \pm connections. See sensor manufacturer for actual cable required for the SSI sensor under use. I1 input can be wired separate from SSI cable. |
| SSI cable length | Depends on desired SSI data rate: 125 kHz...320 m (1050 ft) 250 kHz...160 m (525 ft) 500 kHz...60 m (195 ft) 1 MHz...20 m (65 ft) 2 MHz...8 m (25 ft) |
| SSI sensor power (at V+/- terminals) | 10...28.8V DC common with field power voltage, 0.75A DC maximum with short circuit protection |
| SSI clock drive current, max (out of C+/- terminals) | 750 mA |
| Input I1 category/type | Similar to IEC Type 3, sourcing |
| Voltage, on-state input, min | 0V DC |
| Voltage, on-state input, max | Field Power Supply Voltage minus 10V |

1734-SSI Module Technical Specifications

| | 1734-SSI |
|----------------------------------|--|
| Current, on-state input, min | 2 mA |
| Current, on-state input, nom | 4 mA (Field Power Supply Voltage = 24V DC) |
| Current, on-state input, max | 5 mA |
| Voltage, off-state input, min | Field Power Supply Voltage minus 5V |
| Voltage, off-state input, max | Equal to Field Power Supply Voltage |
| Current, off-state input, max | 1.2 mA |
| Input impedance, nom | 3.6 k Ω |
| Input impedance, max | 4.7 k Ω |
| Input filter time, nom | 0.5 ms |
| Field power supply voltage range | 10...28.8V DC |

⁽¹⁾ Time between successive SSI words (Tp). Also called Dwell Time.

1734-ARM Address Reserve Module

The 1734-ARM address reserve module reserves address and slot numbers to maintain the numbering schemes of purchased I/O module sets.

Non-parameterized, signal modules' structure and address location are retained when replaced with a signal module. The 1734-ARM has no module configuration and does not communicate I/O data.

1734-ARM Module Technical Specifications

| | 1734-ARM |
|--------------------------|--|
| POINTBus current (mA) | 75 |
| Power dissipation, max | 0.375 W @ 5V DC |
| Thermal dissipation, max | 1.3 BTU/hr @ 5V DC |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS |
| Keyswitch position | Use the keyswitch position of the removed module |

1734-CTM Common Terminal and 1734-VTM Voltage Terminal Modules

The POINT I/O Common Terminal Module (1734-CTM) and Voltage Terminal Module (1734-VTM) provide expansion of the termination capability of POINT I/O. Install the Common and Voltage Terminal Modules on a 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS terminal base assembly to

provide support for higher density (8 channel) POINT I/O modules and management of wiring of field devices to the POINT I/O solution.

1734 Terminal Modules Technical Specifications

| | 1734-CTM | 1734-VTM |
|----------------------------------|--|--|
| POINTBus current (mA) | — | |
| Power dissipation | — | |
| Thermal dissipation | — | |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | |
| Keyswitch position | 5 | |
| Isolation voltage | 250V (continuous), Basic Insulation Type Type tested at 1600V DC for 60 s, field-side to system | |
| Field power supply voltage range | 10...28.8V DC, 120/240V AC | |
| Field power supply current, max | 2 A per point, 4 A module | |
| Terminal base screw torque | Determined by installed terminal block | |
| Field wiring terminations | 0 - Common 1 - Common 2 - Common 3 - Common 4 - Common 5 - Common 6 - Common 7 - Common | 0 - Voltage out 1 - Voltage out 2 - Voltage out 3 - Voltage out 4 - Voltage out 5 - Voltage out 6 - Voltage out 7 - Voltage out |

1734-4IOL 4 Channel IO-Link Master Module

The POINT I/O 4 Channel IO-Link Master module provides four channels that can be individually configured as IO-Link master or as a standard digital I/O module. The IO-Link channel master module can be configured to fit any IO-Link and/or discrete application.

In IO-Link Master mode, the module supports four channels for IO-Link master communication with IO-Link compatible devices. In standard digital I/O mode, the module supports four channels of digital input or output. Digital input channels support IEC61131-2 type 1 input. Channels can also be disabled if not in use.

1734-4IOL Module Technical Specifications

| | 1734-4IOL |
|-----------------------------|---|
| Number of inputs | 4 single-ended, non-mutual isolated, configurable |
| Number of outputs | |
| Communication rate, IO-Link | 4.8 kB; 38.4 kB; 230.4 kB |

1734-4IOL Module Technical Specifications

| | |
|-----------------------------------|--|
| Device cable length, IO-Link, max | 20 m |
| Terminal base screw torque | 0.8 Nm (7 lb-in.) |
| Module location | 1734-TB, 1734-TBS, 1734-TB3, 1734-TB3S, 1734-TOP, 1734-TOPS, 1734-TOP3, or 1734-TOP3S wiring base assembly |
| POINTBus current, max | 100 mA @ 5V DC |
| Power dissipation, max | 1.5 W @ 28.8V DC |
| Thermal dissipation, max | 5.12 BTU/hr @ 28.8V DC |
| Isolation voltage | 50V (continuous), Basic Insulation Type Tested at 2121V DC for 60 s, field-side to system. No isolation between individual channels. |
| Field power bus supply, nom | 24V DC |
| Field power bus supply, min | 19.2V DC |
| Field power bus supply, max | 28.8V DC |
| Indicators | 1 green/red – module status indicator 1 green/red – network status indicator 4 yellow – channel status indicators 4 green – IO-Link status indicators |
| Wiring category ⁽¹⁾ | 2 – on signal ports |
| Wire size | 0.25...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 75 °C (167 °F), or greater. 1.2 mm (3/64 in.) insulation max |
| Wire type | Copper |
| Dimensions, approx., HxWxD | 56 x 12 x 75.5 mm (2.21 x 0.47 x 2.97 in.) |
| Weight, approx. | 36 g (1.27 oz) |
| Enclosure type rating | None (open-style) |
| Keyswitch position | 2 (specialty) |

⁽¹⁾ Use this conductor category information for planning conductor routing as described in Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Specialty I/O Modules Environmental Specifications**1734 Specialty I/O Modules Environmental Specifications**

| Attribute | Value |
|--------------------------|--------------------------|
| Operating temperature | -20...55°C (-4...131°F) |
| Nonoperating Temperature | -40...85°C (-40...185°F) |
| Relative humidity | 5...95% noncondensing |
| Operating shock | 30 g |
| Nonoperating shock | 50 g |

1734 Specialty I/O Modules Environmental Specifications

| | |
|-----------------------|----------------------|
| Vibration | 5 g @ 10...500 Hz |
| Enclosure type rating | None (open-style) |
| Mounting type | DIN Rail |
| Certifications | c-UL-us, CE, RCM, KC |

Counter Modules

The POINT I/O counter modules serve as signal conditioners and function blocks (that is, counters) between the customer process signals on the mounting base, and the POINTBus backplane containing the command information. The three main functional blocks are the customer digital I/O interface, the counter ASIC, and the microprocessor.

The counter modules accept feedback from:

- Encoders (either single-ended or differential)
- Pulse generators
- Mechanical limit switches
- Frequencies up to 1 MHz

A filter is available with four settings: 50 Hz, 500 Hz, 5 kHz, 50 kHz. The filter can be turned off to achieve the fastest counting rate.

The modules return the count or frequency in the form of a 24-bit binary number (0...16,777,215) expressed in a 32-bit word. Each counter has a user-selectable preset and rollover value associated with it.

The counter modules operate in the following modes.

- Counter mode — read incoming single-phase pulses, return a binary count.
- Encoder mode — read incoming two-phase quadrature pulses, return a binary count.
- Period/rate mode — count internal clocks during the on period, return a frequency (1734-VHSC24 and 1734-VHSC5 outputs are updated only at the end of the period).
- Continuous/rate mode — count internal clocks during the on period, return a frequency (1734-VHSC24 and 1734-VHSC5 outputs are updated continuously during this period).
- Rate measurement mode — read pulses during the sample period, return a frequency.
- Pulse width modulation (PWM) mode — generate a pulse width modulated signal (1734-VHSC24 and 1734-VHSC5 only).
- Pulse generator mode — generates a pulse of defined width, returns width and quantity of trigger (1734-VHSC24 and 1734-VHSC5 only).

The operation of the counter and encoder modes is nearly identical. The difference between the two modes is in the type of feedback (one-phase versus two-phase) for the count direction (up or down). In encoder mode, a transition is expected on B for counting to proceed in a direction. In counter mode, the B input may be left at a static level. All operating modes are selected by writing appropriate configuration data to the module.

1734 Incremental Encoder Modules Technical Specifications

| | 1734-IJ | 1734-IK |
|--|---|---|
| Number of counters | 1 | |
| Input frequency, max | 1.0 MHz counter and encoder X1 configurations (no filter) 500 kHz encoder X2 configuration (no filter) 250 kHz encoder X4 configuration (no filter) | |
| Voltage category/type, input | 5V DC A/Areturn, B/Breturn, Z/Zreturn | 24V DC A/Areturn, B/Breturn, Z/Zreturn |
| Current, off-state input, max | ≤0.250 mA | ≤0.250 mA |
| Voltage, off-state input, max | ≤1.25V DC | ≤1.8V DC |
| Current, on-state input, min | ≥5 mA | |
| Current, on-state input, max | 25.7 mA @ 6V DC 19.1 mA @ 5V DC | 6.1 mA @ 15V DC or 10.2 mA @ 24V DC |
| Voltage, on-state input, min | ≥2.6V DC | ≥12.5V DC |
| Voltage, on-state input, max | ≤6V DC | Refer to input derating curve |
| Input filter selections, per A/B/Z group | Off 10 μs (50 kHz) 100 μs (5 kHz) 1.0 ms (500 Hz) 10.0 ms (50 Hz) | |
| Power dissipation, max | 1.1 W @ rated load | 1.5 W @ rated load |
| Thermal dissipation, max | 3.75 BTU/hr @ rated load | 5.1 BTU/hr @ rated load |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | |
| Keyswitch position | 2 | |
| Isolation voltage | 50V (continuous), Basic Insulation Type Type tested at 1100V DC for 60 s, field-side to system | |
| External DC supply voltage, nom | No additional external power required to power module | |


1734 VHSC Modules Technical Specifications

| | 1734-VHSC24 | 1734-VHSC5 |
|-------------------------------|--------------|------------|
| Number of counters | 1 | |
| Number of compare windows | 4 | |
| Output groups | 1 group of 2 | |
| Voltage category/type, input | 24V DC | 5V DC |
| Current, off-state input, max | ≤0.250 mA | ≤0.250 mA |

1734 VHSC Modules Technical Specifications

| | | |
|---------------------------------|---|------------------------------------|
| Voltage, off-state input, max | ≤1.8V DC | ≤1.25V DC |
| Current, on-state input, min | ≥5 mA | |
| Current, on-state input, max | 10.2 mA @ 24V DC or 6.1 mA @ 15V DC | 25.7 mA @ 6V DC 19.1 mA @ 5V DC |
| Voltage, on-state input, min | ≥12.5V DC | ≥2.6V DC |
| Voltage, on-state Input, max | Refer to input derating curve | ≥2.6V DC |
| Input filter selections | Off 10 μs (50 kHz) 100 μs (5 kHz) 1.0 ms (500 Hz) 10.0 ms (50 Hz) | |
| Input frequency, max | 1.0 MHz counter and encoder X1 configurations (no filter) 500 kHz encoder X2 configuration (no filter) 250 kHz encoder X4 configuration (no filter) | |
| Output delay time off to on | 25 μs (load dependent) | |
| Power dissipation, max | 1.9 W @ rated load | 1.5 W @ rated load |
| Thermal dissipation, max | 6.5 BTU/hr @ rated load | 5.1 BTU/hr @ rated load |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, or 1734-TOPS | |
| Keyswitch position | 2 | |
| Isolation voltage | 50V (continuous), Basic Insulation Type Type tested at 1100V DC for 60 s, field-side to system | |
| External DC supply voltage, nom | No additional external power required to power module ⁽¹⁾ | |

⁽¹⁾ Does not represent power required to supply outputs.

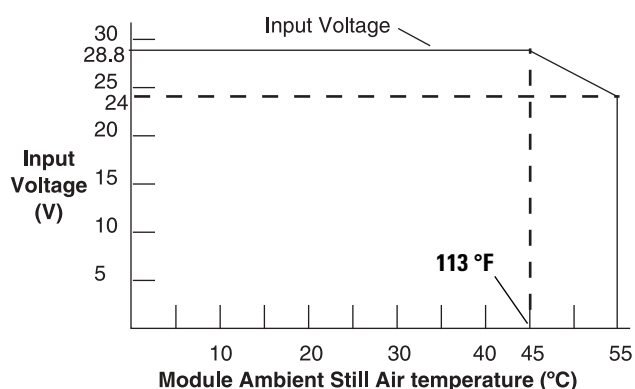1734-VHSC24 Input Derating Curve

Note: Exceeding the maximum input voltage can cause permanent damage to the input.

Counter Modules Environmental Specifications

1734 Counter Modules Environmental Specifications

| | |
|---|----------------------------|
| Operating temperature | -20...55 °C (-4...131 °F) |
| Nonoperating Temperature | -40...85 °C (-40...185 °F) |
| Relative humidity | 5...95% non-condensing |
| Operating shock | 30 g |
| Nonoperating shock | 50 g |
| Vibration | 5 g @ 10...500 Hz |
| Enclosure type rating | None (open-style) |
| Mounting type | DIN Rail |
| Certifications (when product is marked) | c-UL-us, CE, C-Tick, Ex |

Safety I/O Modules

Use the POINT Guard I/O Safety Modules in the POINT I/O platform to distribute Safety I/O on a GuardLogix, Compact GuardLogix or SmartGuard system. You can configure the modules by using the network configuration tool, RSNetWorx software, or the GuardLogix programming tool, RSLogix 5000 software, version 17 or later.

GuardLogix systems are intended for the use of POINT Guard I/O modules with an EtherNet/IP adapter. SmartGuard systems are intended to use POINT Guard I/O modules with the 1734-PDN module.

Use the modules to construct a safety-control network system that meets the requirements up to Safety Integrity Level 3 (SIL 3) as defined in IEC 61508, Functional Safety of Electrical, Electronic, and Programmable Electronic Safety-related Systems, and the requirements for Safety Category 4 / Performance Level e of the EN ISO 13849-1 standard.

1734-IB8S Technical Specifications

| Attribute | Value |
|-------------------------------|-----------------|
| Safety Input | |
| Inputs per module | 8 |
| Input type | Current sinking |
| Voltage, on-state input | 11...30V DC |
| Voltage, off-state input, max | 5V DC |
| Current, on-state input, min | 3.3 mA |
| Current, off-state, max | 1.3 mA |

1734-IB8S Technical Specifications

| Attribute | Value |
|--|--|
| IEC 61131-2 (input type) | Type 3 |
| Reaction time | <16.2 ms |
| Pulse Test Output | |
| Output type | Current sourcing |
| Number of sources (T0, T1M, T2, T3M) | 4 |
| Test output current (each output point) | 0.7 A max |
| Aggregate current of test outputs per module | 2.8 A @ 40 °C (104 °F) |
| 1734-IB8S temperature versus current derating for both horizontal and vertical installations | <p>2.8 A 2.0 A</p> <p>-20 °C (-4 °F) 40 °C (104 °F) 55 °C (131 °F)</p> |
| Residual voltage, max | 1.2V |
| Output leakage current, max | 0.1 mA |
| Short circuit protection | Yes |
| Current, max (when used to control muting lamp) | 25 mA (to avoid fault when used as a muted lamp output) |
| Current, min (when used to control muting lamp) | 5 mA (at which fault indication is generated when used as a muted lamp output) |

1734-IE4S – Safety Analog Input Module Specifications

| Attribute | Specification |
|------------------------------|--|
| Safety Analog Input | |
| Inputs per module | 4 single-ended |
| Input type | Software-configurable for voltage, current, or tachometer |
| Input voltage mode ranges | ±5V, ±10V, 0...5V, 0...10V |
| Input current mode ranges | 0...20 mA, 4...20 mA |
| Input tachometer mode ranges | 0...24V with configurable ON and OFF thresholds in 1V increments |

1734-IE4S – Safety Analog Input Module Specifications

| Attribute | Specification | |
|--|--|---|
| Voltage code range | Bipolar modes: -32768/+32767 Unipolar modes: 0/+32767 | |
| Current code range (4...20 mA mode) | -8192...32767 | |
| Tachometer code range | 0...1000 | |
| Voltage overrange thresholds | @ ±10V: 10.0V @0 ...10V: 10.0V | @±5V: 5.0V @0...5V: 5.0V |
| Voltage underrange thresholds | @ ±10V: -10.0V @0 ...10V: 0.5V | @±5V: -5.0V @0...5V: 0.25V |
| Current overrange thresholds | @ 0...20 mA: 20.0 mA | @4...20 mA: 20.0 mA |
| Current underrange thresholds | @ 0...20 mA: 0.5 mA | @4...20 mA: 4.0 mA |
| Tachometer frequency range | 1...1000 Hz | |
| Tachometer overrange threshold | 1 kHz | |
| ADC resolution | 12 bits | |
| Filter | Single-pole anti-aliasing filter: • Filter frequency = 10 Hz followed by four-pole digital filter Available corner frequencies, approx. • 1 Hz • 5 Hz • 10 Hz • 50 Hz | |
| Step response to 63% (approx.) | Filter frequency @ 1 Hz = 450 ms Filter frequency @ 5 Hz = 125 ms Filter frequency @ 10 Hz = 72 ms Filter frequency @ 50 Hz = 25 ms | |
| Normal mode rejection | Filter frequency @ 1 Hz: • 3 dB @ 0.7 Hz • 70 dB @ 50 Hz • 70 dB @ 60 Hz Filter frequency @ 5 Hz: • 3 dB @ 2.6 Hz • 70 dB @ 50 Hz • 70 dB @ 60 Hz | Filter frequency @ 10 Hz: • 3 dB @ 4.8 Hz • 50 dB @ 50 Hz • 50 dB @ 60 Hz Filter frequency @ 50 Hz: • 3 dB @ 10.2 Hz • 20 dB @ 50 Hz • 20 dB @ 60 Hz |
| Voltage mode input impedance | > 200K Ohms | |
| Current mode input impedance | <100 Ohms | |
| Tachometer mode input impedance | > 200K Ohms | |
| Data value format | 16-bit, two's complement | |

1734-IE4S – Safety Analog Input Module Specifications

| Attribute | Specification | |
|--|---|---|
| Accuracy | Voltage mode | @ 25° C [77° F]: ±0.5% full scale Drift: ±0.02% full scale/°C |
| | Current mode | @ 25° C [77° F]: ±0.6% full scale Drift: ±0.03% full scale/°C |
| | Tachometer mode | @ 25° C [77° F]: ±2% gain error drift: ±0.1%/°C additional gain error, due to temperature Example for a module at 100 Hz and 55 °C: Accuracy = 100 Hz x (0.02 + (0.001 x (55-25))) = 100 Hz x (0.02 + 0.03) = ±5 Hz error |
| Calibration | Factory-calibrated; no user-calibration | |
| Maximum overload on inputs | ±30V | |
| I/O scan rate | ≥ 6 ms | |
| Wire type | Shielded on signal ports | |
| POINTBus | | |
| Field power input | 19.2...28.8V DC, 65 mA, Class 2 | |
| Sensor Output | | |
| Output type | Sensor power supply, 24V DC | |
| Rated output current per point | 150 mA max. per output @ 55°C (131 °F) | |
| On-state voltage drop | ≤ 0.5V | |
| Leakage current, max | < 0.1 mA | |
| Over current detection | Yes | |
| Open load detection | Yes | |
| Aggregate current of sensor outputs per module | 600 mA | |
| Terminal base screw torque | See terminal base specifications | |

Step Response and Filter Response for 1734-IE4S Modules


| Filter Setting | Step Response to 63% | Corner Frequency-3 dB |
|----------------|----------------------|-----------------------|
| 50 Hz | ~ 25 ms | 10.2 Hz |
| 10 Hz | ~ 72 ms | 4.75 Hz |
| 5 Hz | ~ 125 ms | 2.62 Hz |
| 1 Hz | ~ 450 ms | 0.68 Hz |

Environmental Specifications

| Attribute | Value |
|-----------------------------------|---|
| Temperature, operating | IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock): -20...55 °C (-4...131 °F) ⁽¹⁾ |
| Temperature, nonoperating | IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock): -40...85 °C (-40...185 °F) |
| Temperature, surrounding air, max | 55 °C (131 °F)(1) |
| Relative humidity | IEC 60068-2-30 (Test Db, Unpackaged Damp Heat): 5...95% noncondensing |
| Vibration | IEC 60068-2-6, (Test Fc, Operating) 5 g @ 10...500 Hz |
| Shock, operating | IEC 60068-2-27 (Test Ea, Unpackaged Shock) 30 g |
| Shock, nonoperating | IEC 60068-2-27 (Test Ea, Unpackaged Shock) 50 g |
| Emissions | CISPR 11:Group 1, Class A |
| ESD immunity | IEC 61000-4-2: 6 kV contact discharges 8 kV air discharges |
| Radiated RF immunity | IEC 61000-4-3: 10V/m with 1kHz sine-wave 80% from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100%AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100%AM @ 1890 MHz 3V/m with 1 kHz sine-wave 80%AM from 2000...2700 MHz |
| EFT/B immunity | IEC 61000-4-4: ±3 kV @ 5 kHz on power ports ±3 kV @ 5 kHz on signal ports |
| Surge transient immunity | IEC 61000-4-5: ±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±2 kV line-earth (CM) on shielded ports |
| Conducted RF immunity | IEC 61000-4-6: 10V rms with 1 kHz sine-wave 80%AM from 150 kHz...80 MHz |

⁽¹⁾ Refer to [System Temperature Derating When a 1734-IF4S Module Is Used on page 46](#).

System Temperature Derating When a 1734-IE4S Module Is Used

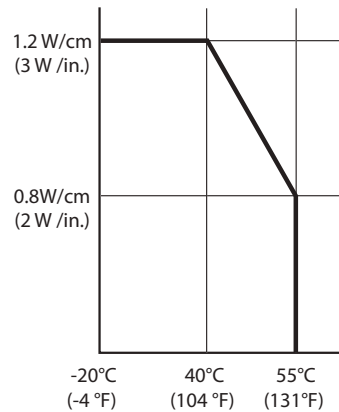

1734-OB8S – Technical Specifications

| Attribute | Value | | | | | | | | | | | | |
|--|---|------------------|------------------|-------------|-----|----|---|----|-----|---|----|-----|---|
| Safety Output | | | | | | | | | | | | | |
| Outputs per module | 8 | | | | | | | | | | | | |
| Output type | Current sourcing | | | | | | | | | | | | |
| Output current (each output point), max | 1 A | | | | | | | | | | | | |
| Residual voltage (drop) | <0.6V | | | | | | | | | | | | |
| Leakage current, max | 0.1 mA | | | | | | | | | | | | |
| Short-circuit detection | Yes (short high and low and cross-circuit fault detect) | | | | | | | | | | | | |
| Short-circuit protection | Electronic | | | | | | | | | | | | |
| Aggregate current of outputs per module | 8 A (4 A per terminal base) @ 40 °C (104 °F) | | | | | | | | | | | | |
| 1734-OB8S temperature versus current derating for both horizontal and vertical installations | <table><caption>1734-OB8S Temperature Versus Current Derating Data</caption><thead><tr><th>Temperature (°C)</th><th>Temperature (°F)</th><th>Current (A)</th></tr></thead><tbody><tr><td>-20</td><td>-4</td><td>8</td></tr><tr><td>40</td><td>104</td><td>8</td></tr><tr><td>55</td><td>131</td><td>4</td></tr></tbody></table> | Temperature (°C) | Temperature (°F) | Current (A) | -20 | -4 | 8 | 40 | 104 | 8 | 55 | 131 | 4 |
| Temperature (°C) | Temperature (°F) | Current (A) | | | | | | | | | | | |
| -20 | -4 | 8 | | | | | | | | | | | |
| 40 | 104 | 8 | | | | | | | | | | | |
| 55 | 131 | 4 | | | | | | | | | | | |
| Reaction time | <6.2 ms | | | | | | | | | | | | |

1734-IB8S, 1734-OB8S, 1734-IE4S – Technical Specifications

| Attribute | 1734-IB8S | 1734-OB8S | 1734-IE4S |
|---|---|--------------|---|
| POINTBus | | | |
| POINTBus current, max | 175 mA | 190 mA | 110 mA @ 5V |
| Power dissipation, max | 2.44 W | 3.02 W | 2.2 W |
| Thermal dissipation | 8.34 BTU/hrr | 10.32 BTU/hr | 7.5 BTU/hr |
| Isolation voltage | 50V (continuous), Basic Insulation Type between field side and system No isolation between individual channels Type tested @ 707V DC for 60 s | | 50V continuous- basic Insulation Type, I/O and field power to system Type tested @ 500V AC for 60 seconds. No isolation between individual I/O or I/O to field power. |
| Power bus, operating supply voltage, nom | 24V DC | | |
| Power bus, operating voltage range | 19.2...28.8V DC | | |
| Input filter time, OFF to ON ⁽¹⁾ | 0...126 ms (in 6 ms increments) | | |
| Input filter time, ON to OFF ⁽¹⁾ | | | |
| Terminal base screw torque | See terminal base specifications | | |
| Indicators | 1 yellow lock status indicator 1 green/yellow power status indicator 8 I/O channel status indicators | | 4 analog input (yellow/red) 4 sensor power (green/red) 1 power (green/yellow) |

⁽¹⁾ Input off-to-on filter time is the time from a valid input signal to recognition by the module. Input on-to-off time is the time from a valid input signal to recognition by the module.

1734-IB8S, 1734-OB8S, and 1734-IE4S Physical Specifications

| Attribute | Value |
|--------------------------------------|--|
| Keyswitch positions (left and right) | 1734-IB8S: Key 1 = 8 (left); Key 2 = 1 (right) 1734-OB8S: Key 1 = 8 (left); Key 2 = 2 (right) 1734-IE4S: Key 1 = 8 (left); Key 2 = 3 (right) |
| Terminal base unit | 1734-TB, 1734-TBS, 1734-TOP, 1734-TOPS, 1734-TOP3, 1734-TOP3S |
| Pilot duty rating | Not rated (1734-OB8S and 1734-IE4S) |
| North America temp code | T4 (1734-OB8S and 1734-IB8S) T4A (1734-IE4S) |
| IEC temp code | T4 |
| Enclosure type rating | None (open-style) |
| Wiring category ⁽¹⁾ | 2 – on signal ports (1734-IB8S, 1734-OB8S, 1734-IE4S) 1 – on power ports (1734-IE4S only) |

1734-IB8S, 1734-OB8S, and 1734-IE4S Physical Specifications

| Attribute | Value |
|---|--|
| Wire size | Determined by installed terminal block. |
| Weight, approx. | 62.4 g (2.2 oz) – 1734-IB8S and 1734-OB8S 68 g (2.4 oz) – 1734-IE4S |
| Dimensions (HxWxD), approx. (without terminal block) | 77 x 24 x 55 mm (3.03 x 0.94 x 2.17 in.) |


⁽¹⁾ Use this conductor category information for planning conductor routing. Refer to the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

POINT I/O Accessories


POINT I/O Marker Card

The POINT I/O Marker Card is available under catalog number 1492-SM5X5. Each kit contains five 12.7 x 12.7 cm (5 x 5 in.) cards with 100 markers per card. You can enter text on the marker cards using different font sizes and text widths; you can print multiple lines on one marker card; you can even print common symbols.

POINTBus Extension Cable

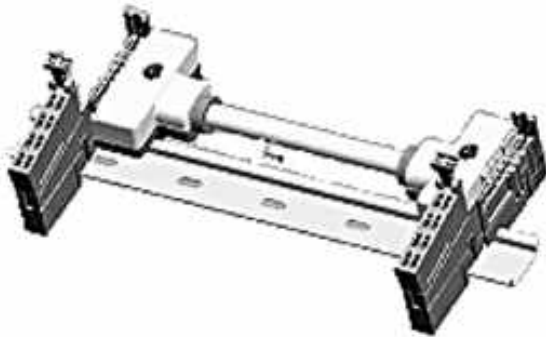

45219

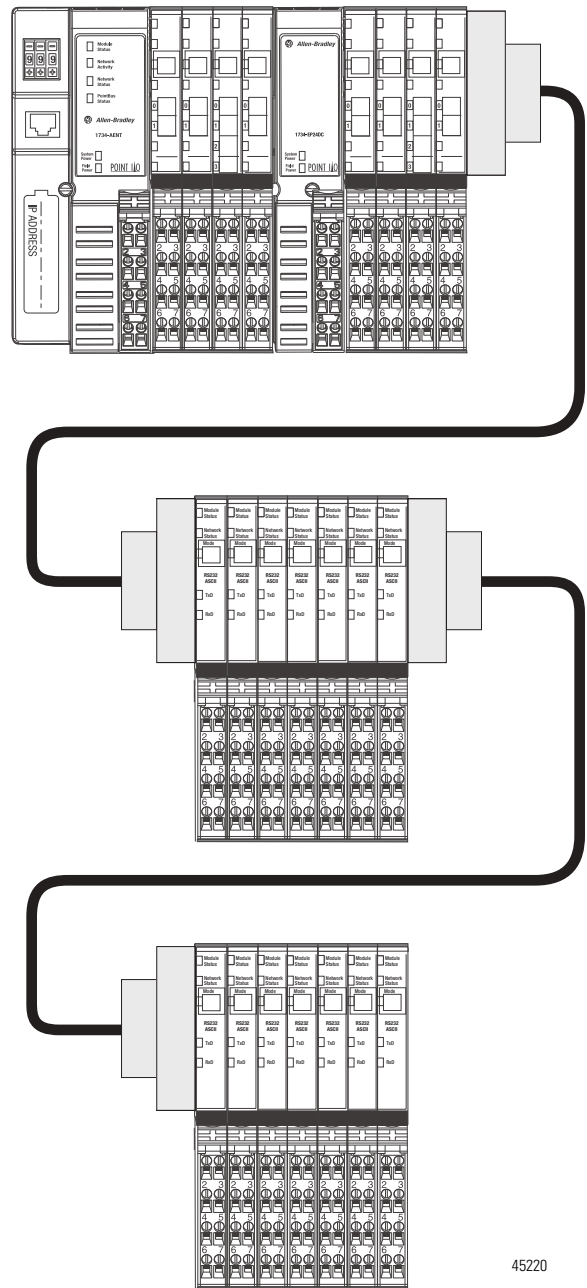

45220

The POINT I/O POINTBus Extension Cable is available in 1 meter and 3 meter lengths as:

- 1734-EXT1; 1 meter extension
- 1734-EXT3; 3 meter extension

Notes:

Select a Terminal Base Assembly

Step 3 - Select:

- the appropriate terminal base unit for your module

| | |
|--------------------------------|---------|
| Terminal Base Assembly | page 51 |
| One-piece Terminal Bases | page 53 |

The POINT I/O system follows a No Tools design approach. The I/O mounting base, removable terminal block (RTB), and I/O module may be assembled as a system without tools.

Terminal Base Assembly

The POINT I/O mounting base mounts directly on the DIN-rail, either vertically or horizontally, and forms the interconnect for the POINTBus backplane communication and field power-bus distribution. The mechanical keying of the mounting base prevents incorrect module placement. The I/O mounting base and removable terminal block are sold together (pre-assembled) as a single unit called a Terminal Base Assembly.

The pins on the 1734-TB terminal base assembly are independent of each other. The connections for the 1734-TB and 1734-TB3 are determined by the 1734 module being used.

Terminal Base Pins

1734-TB, -TBS, -TOP, -TOPS

| | |
|---|---|
| 0 | 1 |
| 2 | 3 |
| 4 | 5 |
| 6 | 7 |

45217

1734-TB3, -TB3S, -TOP3, -TOP3S


| | |
|----|----|
| 0 | 1 |
| 2 | 3 |
| 4 | 5 |
| 6 | 7 |
| 8 | 9 |
| 10 | 11 |

45218

Pins 4, 5, 8, and 9 are connected together.
Pins 6, 7, 10, and 11 are connected together.

Each assembly includes a removable terminal block (RTB) provides 8 or 12 separate terminal locations for field wiring. The RTB also provides vertical access to wire and screw terminations. A separate terminal point is provided for each wire, including a shield ground terminal point for 2-point analog modules.

POINT I/O Removable Terminal Base Assembly

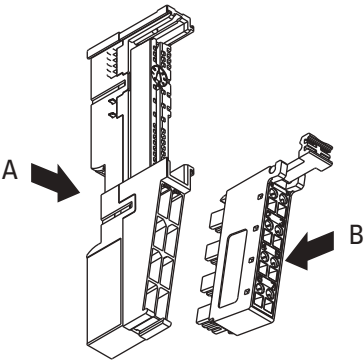

45103

Each terminal base assembly includes a base (A) that mounts onto the DIN-rail and a removable terminal block (B) for I/O wiring.

Once the RTB is wired properly, you never need to rewire terminations. The RTB separates independently of the I/O mounting base and I/O module to facilitate rapid installation and commissioning of the system. Each terminal is numbered on the bottom of the RTB to simplify troubleshooting during commissioning or maintenance cycles. Spare or replacement RTBs can be ordered separate from the terminal base assembly.

Terminal Base Assemblies


| Terminal Base Assembly Cat. No. | Description | Terminal Base Screw Torque | Replacement RTB Cat. No. |
|---------------------------------|---|-------------------------------|----------------------------|
| 1734-TB | Mounting base with 8-terminal cage-clamp RTB | 0.6 Nm (7 lb-in) | 1734-RTB |
| 1734-TBS | Mounting base with 8-terminal spring-clamp RTB | | 1734-RTBS |
| 1734-TB3 | Mounting base with 12-terminal cage-clamp RTB | | 1734-RTB3 |
| 1734-TB3S | Mounting base with 12-terminal spring-clamp RTB | | 1734-RTB3S |
| 1734-TBCJC ⁽¹⁾ | Mounting base with cold-junction compensation RTB | 0.5...0.6 Nm (5...7 lb-in) | 1734-RTBCJC ⁽¹⁾ |

⁽¹⁾ For use with the 1734-IT21 thermocouple input module.

One-piece Terminal Bases

The POINT I/O one-piece terminal base is a mounting base with an integrated terminal block.

POINT I/O One-piece Terminal Base

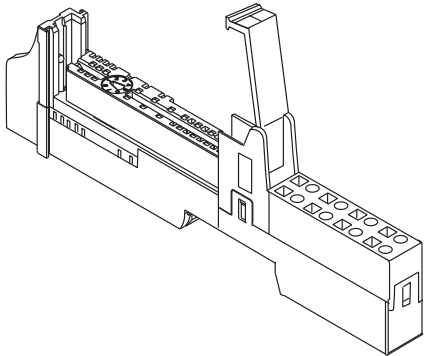

1734 One-piece Terminal Bases

| Cat. No. | Description | Terminal Base Screw Torque |
|------------|--|-------------------------------|
| 1734-TOP | 8-terminal screw-clamp terminal base | 0.6 Nm (7 lb-in) |
| 1734-TOPS | 8-terminal spring-clamp terminal base | |
| 1734-TOP3 | 12-terminal screw-clamp terminal base | |
| 1734-TOP3S | 12-terminal spring-clamp terminal base | |

Notes:

Select a Power Supply Unit

Step 4 - Select:

- the appropriate power unit

POINT I/O Communication Adapters page 55

Expansion Power Supplies page 56

Field Power Distributor page 59

Power units are divided into three categories:

- Communication adapter with built-in power supply (DC-DC)
- Expansion power supply
- Field power distributor

POINT I/O Communication Adapters

POINT I/O communication adapters have built-in POINTBus power supplies. All POINT I/O modules are powered from the POINTBus backplane by either an adapter or expansion power supply.

1734 Communication Adapters Power Specifications

| | 1734-AENT(R) | 1734-ACNR | 1734-PDN | 1734-ADN(X) | 1734-APB |
|-------------------------------|---|---|---|---|---|
| Input voltage, nom | 24V DC | 24V DC | 24V DC | 24V DC | 24V DC |
| Input voltage range | 10...28.8V DC | 10...28.8V DC | 11...25V DC DeviceNet specification | 10...28.8V DC | 10...28.8V DC |
| Field side power requirements | 400 mA @ 24V DC (+20% = 28.8V DC) | 425 mA @ 24V DC (+20% = 28.8V DC) | 400 mA @ 24V DC (+4% = 25V DC) | 400 mA @ 24V DC (+20% = 28.8V DC) | 400 mA @ 24V DC (+20% = 28.8V DC) |
| Inrush current | 6 A for 10 ms | 6 A for 10 ms | 6 A for 5 ms | 6 A for 10 ms | 6 A for 10 ms |
| POINTBus current (mA) | 700 ⁽¹⁾ | 1000 ⁽²⁾ | 1300 ⁽³⁾ | 1000 ⁽²⁾ | 1000 ⁽²⁾ |
| Power consumption at 24V | 4.5 W | 8.0 W | 8.0 W | 8.0 W | 8.0 W |

1734 Communication Adapters Power Specifications

| | 1734-AENT(R) | 1734-ACNR | 1734-PDN | 1734-ADN(X) | 1734-APB |
|------------------------------|--|---------------|-------------|--|---------------|
| Power dissipation, max | 2.8 W @ 28.8V | 2.8 W @ 28.8V | 1.2 W @ 25V | 2.8 W @ 28.8V | 2.8 W @ 28.8V |
| Input overvoltage protection | Reverse polarity protected | | | | |
| Interruption | Output voltage will stay within specifications when input drops out for 10 ms @ 10V with max load. | | — | Output voltage will stay within specifications when input drops out for 10 ms @ 10V with max load. | |

⁽¹⁾ 700 mA when input voltage < 17V DC.

⁽²⁾ 1000 mA @ 5V DC $\pm 5\%$ (4.75...5.25V).

⁽³⁾ 1300 mA @ 5V DC $\pm 5\%$ (4.75...5.25V).

Expansion Power Supplies

The 1734-EP24DC or 1734-EPAC expansion power supplies provides two services:

- Breaks the field power distribution at the left of the power supply (1734-EP24DC or 1734-EPAC) from the field power distribution to the right of the power supply (1734-EP24DC or 1734-EPAC)
- Adds an additional 1.3 A of current to the POINTBus for I/O modules to the right of the power supply (1734-EP24DC or 1734-EPAC)

The expansion power unit maintains the integrity of the POINT I/O backplane by not interrupting the POINTBus data.

The 1734-EP24DC expansion power unit passes 24V DC field power on the POINTBus backplane to the I/O modules to the right of it. The 1734-EPAC expansion power unit passes 120/240V AC field power on the POINTBus backplane to the I/O modules to the right of it. These units extend the backplane bus power and creates a new field voltage partition segment for driving field devices for up to 17 I/O modules. The expansion power units separate field power from I/O modules to the left of the unit, effectively providing functional and logical partitioning for:

- separating field power between input and output modules.
- separating field power to the analog and digital modules.
- grouping modules to perform a specific task or function.

You can use multiple expansion power units with the 1734-ADN, 1734-ADNX, 1734-ACNR, 1734-AENT, and 1734-APB communication adapters to assemble a full system. For instance, if you are using the 1734-ADN adapter, you can use a 1734-EP24DC or 1734-EPAC expansion power unit to add additional modules.

For example, if you have a 36 module system with a 1734-ADN adapter, you have to add at least two or more 1734-EP24DC or 1734-EPAC expansion

power units to provide more POINTBus current for modules to the right of the supply.


- 24...5V DC converter (1734-EP24DC)
120/240V AC to 5V DC converter (1734-EPAC)
- 1.3 A, 5V DC output (extend backplane power)
- Starts new voltage distribution
- Partitioning
- Dark-gray color for easy visual inspection and identification

You can use the 1734-EP24DC or 1734-EPAC expansion power supply only with POINT I/O adapters. Do not use it with the 1734-PDN or 1734D series communication interfaces.


1734 Expansion Power Supplies Technical Specifications

| | 1734-EP24DC | 1734-EPAC |
|-------------------------------------|--|--|
| Field side power requirements, max | 400 mA @ 24V DC (+20% = 28.8V DC max) | 200 mA @ 120V AC, 100 mA @ 240V AC |
| Inrush current, max | 6 A for 10 ms | 2 A for 6 ms |
| POINTBus output current rating | Horizontal mounting: 1 A @ 5V DC for 10...19.2V input 1.3 A @ 5V DC for 19.2...28.8V input Vertical mounting: 1 A @ 5V DC for 10...28.8V input | Horizontal DIN rail mounting: 1.3 A @ 5.2V DC Vertical DIN rail mounting: 1.0 A @ 5.2V DC |
| Overvoltage protection, inputs | Reverse polarity protected | MOV and fuse protected |
| PowerSupply interruption protection | Output voltage will stay within specifications when input drops out for 10 ms @ 10V with max load | Output voltage will stay within specifications when input drops out for 10 ms @ 85V with max load |
| Power supply input voltage, nom | 24V DC | 120/240V AC |
| Operating voltage range | 10...28.8V DC | 85...264V AC |
| Power consumption, max | 9.8 W @ 28.8V DC | 15.1 W @ 264V AC |
| Power dissipation, max | 3.0 W @ 28.8V DC | 8.4 W @ 264V AC |
| Thermal dissipation, max | 10.0 BTU/hr @ 28.8V DC | 28.7 BTU/hr @ 264V AC |
| Isolation voltage | 50V (continuous), Basic Insulation Type Type tested at 2600V DC for 60 s, User power to system, User power to Chassis ground, system to Chassis ground | 264V (continuous), Reinforced Insulation Type Type tested @ 3250V DC for 60 s, User power to system |
| Field power supply voltage range | 10...28.8V DC | 120...240V AC |
| Field power supply current, max | 10 A | 10 A |


1734-EP24DC Current Derating for Mounting

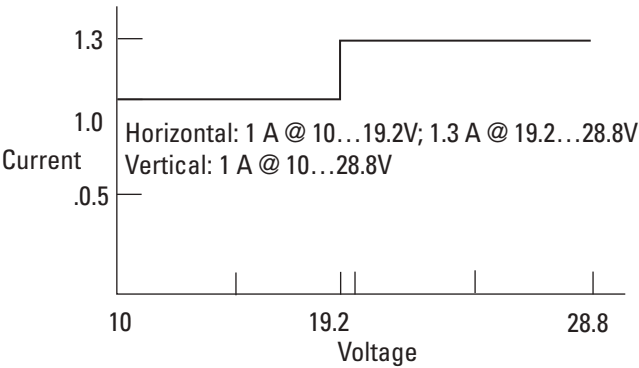


1734-EPAC Current Derating for Mounting

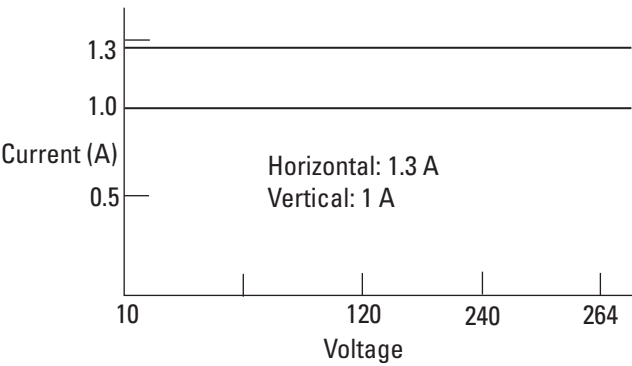


Example of Continuing Power to Field Devices

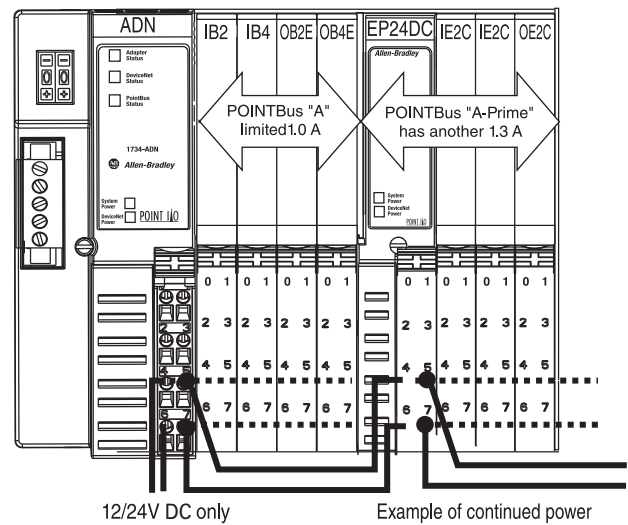

Example of Logical Partitioning

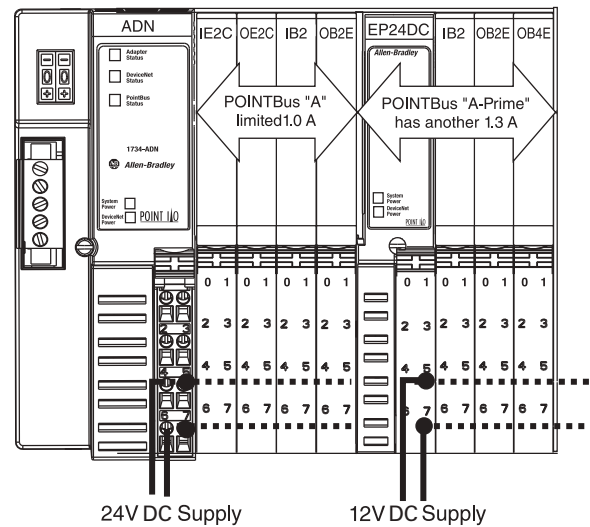

Example of Functional Partitioning

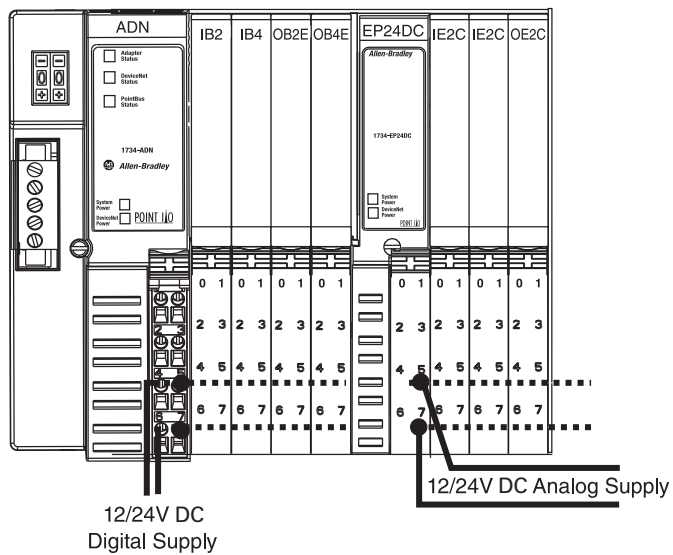

Field Power Distributor

The 1734-FPD breaks the field power distribution at the left of the 1734-FPD from the field power distribution to the right of the 1734-FPD.

You can use the 1734-FPD field power distributor with a broad range of voltage inputs including 5...125V DC and 24...240V AC applications and I/O modules.

- Field-side voltage distribution module
- AC or DC input

- For use with all communication interfaces
- Partitioning (auxiliary power, major motion, or minor motion)
- Starts new voltage distribution point
- No backplane bus power extension (12 modules maximum) when using the 1734-PDN communication interface as it doesn't add power to the POINTBus backplane


The 1734-FPD field power distributor passes through all POINT I/O backplane signals, but does not provide additional POINTBus backplane power. The field power distributor gives you the ability to change the field power distribution source for I/O modules to the right of the 1734-FPD field power distributor. This facilitates logical or functional partitioning of low-channel count, high I/O-mix applications using any of the communication adapters.

Use the 1734-FPD field power distributor to isolate field power segments.


1734-FPD Technical Specifications

| | 1734-FPD |
|--------------------------------------|---|
| Field side power requirements, max | — |
| Inrush current, max | — |
| POINTBus output current rating | — |
| Overvoltage protection, inputs | — |
| Power supply interruption protection | — |
| Power supply input voltage, nom | 12V/24V DC 120V/220V AC |
| Operating voltage range | 10...28.8V DC 120V/240V AC |
| Power consumption, max | — |
| Power dissipation, max | — |
| Thermal dissipation, max | — |
| Isolation voltage | 250V (continuous), Basic Insulation Type Type tested @ 2600V DC for 60 s, User power to system, User power to Chassis ground, system to Chassis ground |
| Field power supply voltage range | 10...28.8V DC, 120...264V AC |
| Field power supply current, max | 10 A |


Wiring Using a 1734-FPD to Create a New AC Device Power Bus

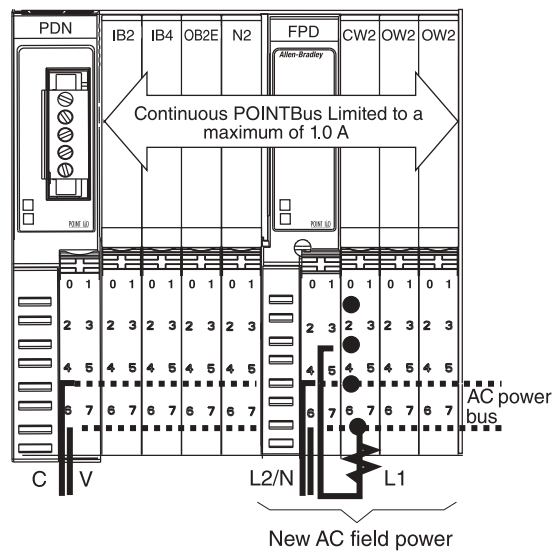

Wiring Using a 1734-FPD to Create a New Analog Device Power Bus

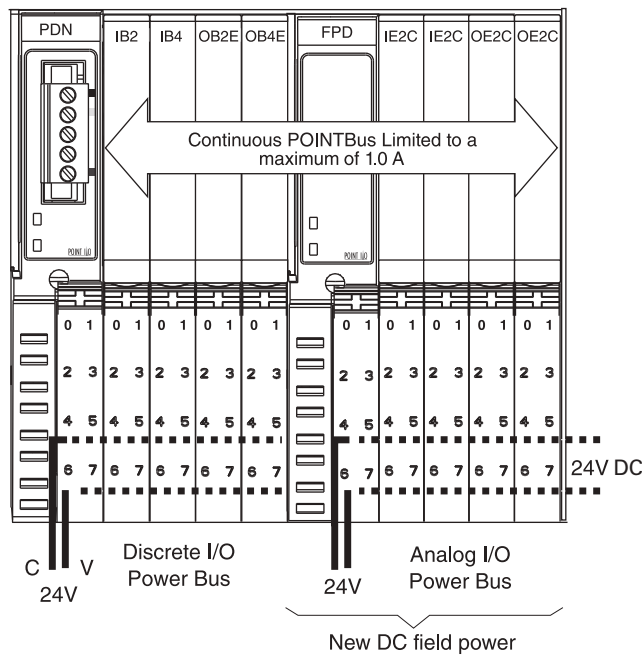

Wiring Using a 1734-FPD to Create a New DC Device Power Bus

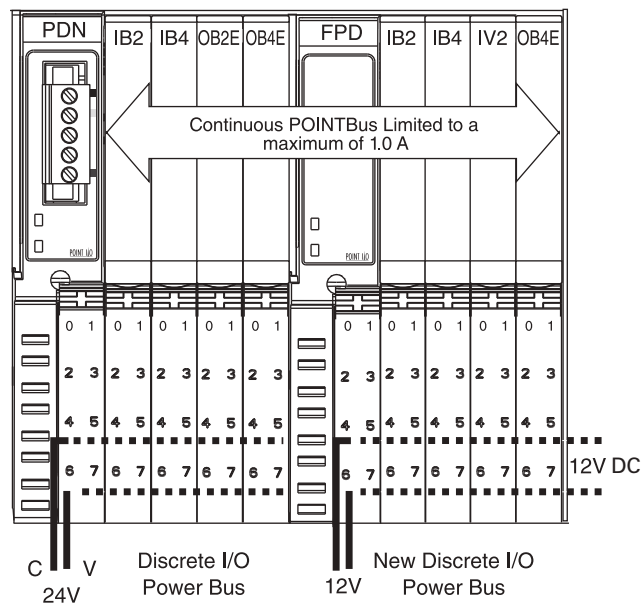

Mounting Requirements

Step 5 - Select:

- appropriate number of DIN rails based on the number of modules and the physical requirements

Power Supply Distance Rating page 63

Mount the POINT I/O System..... page 64

The producer/consumer model multicasts messages. This means that multiple nodes can consume the same data at the same time from a single device.

Where you place POINT I/O modules in the control system determines how the modules exchange data.

For a Rockwell Automation controller to control 1734 I/O, the I/O must be on one of the following:

- the same network as the controller.
- a ControlNet network that is local to that controller.
- an EtherNet/IP network that is local to that controller.

Power Supply Distance Rating

Place modules to the right of the power supply. Each 1734 I/O module can be placed in any of the slots right of the power supply until the usable backplane current of that supply has been exhausted. An adapter provides 1000 mA current to the POINTBus backplane. The 1734-EP24DC or 1734-EPAC Expansion power supply provides up to 1300 mA. I/O modules require from 75 mA (typical for the digital and analog I/O modules) up to 220 mA or more.

Use the following table to plan the maximum size layout of your POINT I/O system.

Maximum Size Layout


| | POINTBus current | No. of I/O Modules with 24V DC Backplane Current (@ 75 mA each), max | No. of I/O Modules with Expansion Power Supplies, max | No. of I/O Module Connections, max |
|----------------------------------|--|---|--|---|
| 1734-PDN on DeviceNet network | 1300 mA | Up to 17 | Expansion power supply not allowed | Not to exceed scanner capacity |
| 1734-ADN(X) on DeviceNet network | 1000 mA | Up to 13 | 63 | Not to exceed scanner capacity |
| 1734-ACNR on ControlNet network | 1000 mA | Up to 13 | 63 | 5 rack and 25 direct |
| 1734-AENT on EtherNet/IP network | 1000 mA | Up to 13 | 63 | 31 total connections (reduced to 20 with safety connections present) including 5 rack/enhanced rack |
| 1734-APB on PROFIBUS network | 1000 mA | Up to 13 | 63 | Not to exceed scanner capacity |
| 1734-EP24DC Expansion Power | Horizontal mounting: 1000 mA @ 5V DC for 10...19.2V 1300 mA @ 5V DC for 19.2...28.8V | Up to 17 | 63 | Not to exceed scanner capacity |
| | Vertical mounting: 1000 mA @ 5V DC for 10...28.8V | Up to 17 | 63 | Not to exceed scanner capacity |
| 1734-EPAC Expansion Power | Horizontal mounting: 1300 mA @ 5.2V DC | Up to 17 | 63 | Not to exceed scanner capacity |
| | Vertical mounting: 1000 MA @ 5.2V DC | Up to 17 | 63 | Not to exceed scanner capacity |

Mount the POINT I/O System

Mount the POINT I/O system on a DIN rail in the horizontal or vertical orientation. Use steel, 35 x 75.5 mm DIN rails (Cat. No. 199-DR1; 46277-3; EN 50022). The DIN rails for all POINT I/O system components must be mounted on a common, conductive surface to ensure proper electro-magnetic interference (EMI) performance. Secure DIN rail approximately every 200 mm (7.87 in).

Approximate Mounting Dimensions


POINT I/O with 1734-PDN Mounting Dimensions

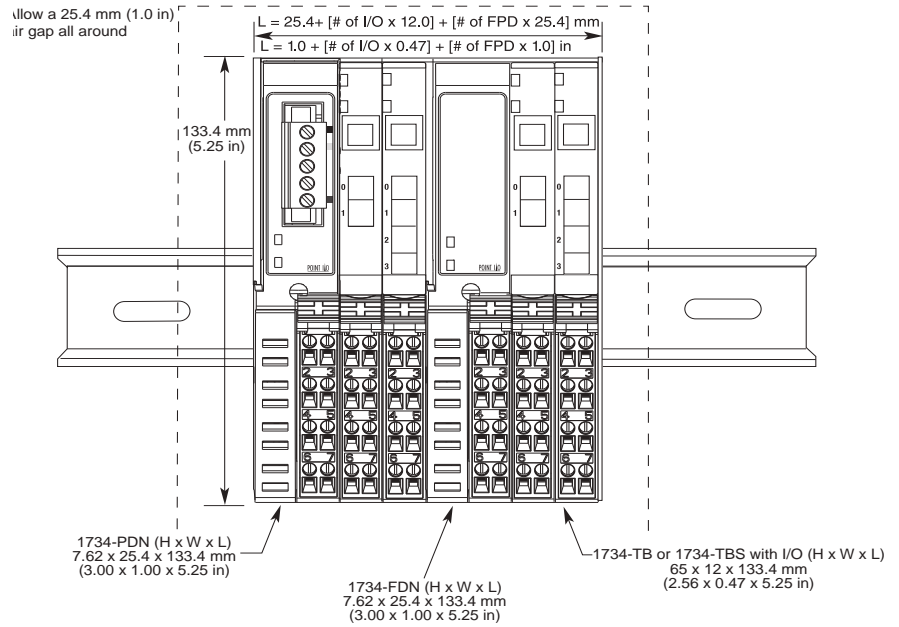

IMPORTANT

When mounting the 1734-IB8S, 1734-OB8S, and 1734-IE4S modules, ensure that there is 2 in. of clearance space above the POINT rail.

POINT I/O with 1734-ADN(X), 1734-ACNR, 1734-AENT, 1734-APB Mounting Dimensions

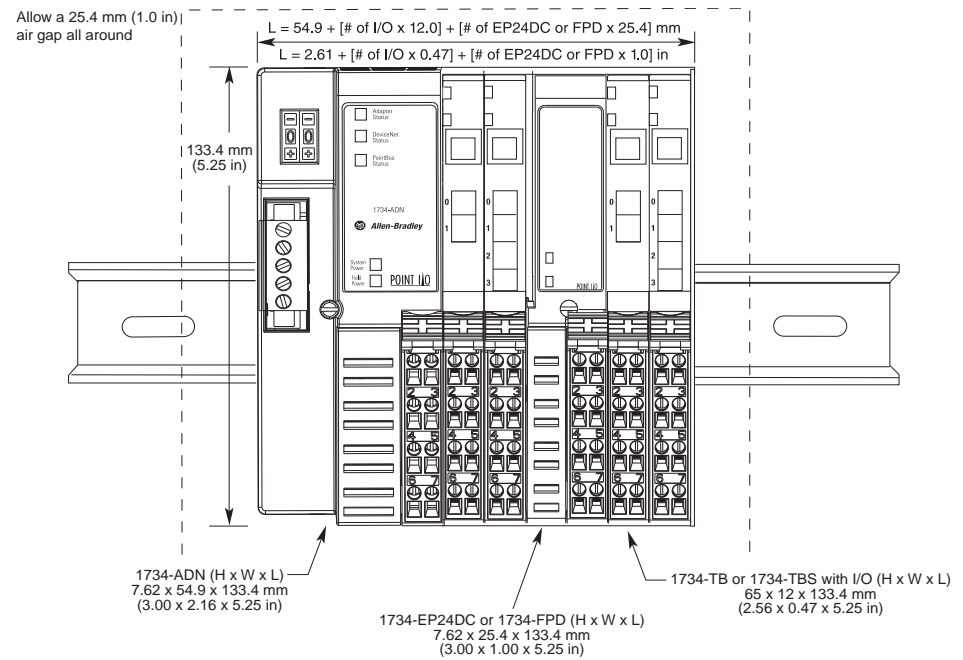

IMPORTANT

When mounting the 1734-IB8S, 1734-OB8S, and 1734-IE4S modules, ensure that there is 2 in. of clearance space above the POINT rail.

Related Documentation

These documents contain additional information concerning related Rockwell Automation products.

You can view or download publications at <http://literature.rockwellautomation.com>. To order paper copies of technical documentation, contact your local Rockwell Automation distributor or sales representative.

| | Cat. No. | Description |
|---------------------------------|----------------------|--|
| General Information | | DeviceNet Media (Media, Sensors and Distributed I/O) Catalog Guide |
| | | DeviceNet Adapter Quick Start |
| | | ControlNet Media |
| | | EtherNet/IP Performance and Application Guide |
| | | Industrial Automation Wiring and Grounding Guidelines |
| | | Allen-Bradley Terminal Marking System Product Profile |
| Communication Interfaces | 1734-ADN(X) | POINT I/O DeviceNet Adapter Module Installation Instructions, publication 1734-IN026 POINT I/O DeviceNet Adapter Module User Manual, publication 1734-UM002 |
| | 1734-PDN | POINT I/O DeviceNet Communication Interface Module Installation Instructions, publication 1734-IN057 |
| | 1734-AENT | POINT I/O Ethernet Adapter Installation Instructions, publication 1734-IN590 POINT I/O EtherNet/IP Communication Adapter Module User Manual, publication 1734-UM011 |
| | 1734-AENTR | POINT I/O 2 Port EtherNet/IP Adapter Installation Instructions, publication 1734-IN040 POINT I/O 2 Port EtherNet/IP Adapter Installation Instructions, publication 1734-UM014 |
| | 1734-ACNR | POINT I/O ControlNet Adapter Installation Instructions, publication 1734-IN582 POINT I/O ControlNet Adapter User Manual, publication 1734-UM008 |
| | 1734-APB | POINT I/O PROFIBUS Adapter Module Installation Instructions, publication 1734-IN014 POINT I/O PROFIBUS Adapter Module User Manual, publication 1734-UM005 |
| Digital and Analog | 1734 Series | POINT I/O Digital and Analog Modules User Manual, publication 1734-UM001 |
| 4 Channel IO-Link Master | 1734-4IOL | POINT I/O 4 Channel IO-Link Master Installation Instructions, publication 1734-IN043 POINT I/O 4 Channel IO-Link Master Module User Manual, publication 1734-UM020 |
| AC | 1734-IA2 1734-IA4 | 120V AC 2 Input Module Installation Instructions, publication 1734-IN010 |
| | 1734-IM2 1734-IM4 | 220V AC 2 Input Module Installation Instructions, publication 1734-IN008 |
| | 1734-OA2 1734-OA4 | 120/220V AC 2 Output Module Installation Instructions, publication 1734-IN009 |

| | Cat. No. | Description |
|---------------------------------|-------------------------------------|--|
| DC | 1734-IB2 1734-IB4 1734-IB8 | 24V DC 2, 4, or 8 Input Sink Module Installation Instructions, publication 1734-IN051 |
| | 1734-IB4D | POINT I/O 24V DC 4-Channel Discrete Input Module Installation Instructions, publication 1734-IN029 |
| | 1734-IV2 1734-IV4 1734-IV8 | 24V DC 2, 4, or 8 Input Source Module Installation Instructions, publication 1734-IN052 |
| | 1734-OB2E 1734-OB4E 1734-OB8E | POINT I/O Protected Output Module Installation Instructions, publication 1734-IN056 |
| | 1734-OB2EP | POINT I/O Protected Output Module Installation Instructions, publication 1734-IN586 |
| | 1734-OB2 1734-OB4 1734-OB8 | POINT I/O Protected Output Module Installation Instructions, publication 1734-IN018 |
| | 1734-OV2E 1734-OV4E 1734-OV8E | POINT I/O Protected Sink Output Module Installation Instructions, publication 1734-IN585 |
| Analog | 1734-IE2C 1734-IE2V | POINT I/O 2 Current and 2 Voltage Input Analog Modules Installation Instructions, publication 1734-IN027 |
| | 1734-IE4C | POINT I/O 4 Channel High Density Current Input Module Installation Instructions publication 1734-IN032 |
| | 1734-IE8C | POINT I/O 8 Channel High Density Current Input Module Installation Instructions publication 1734-IN033 |
| | 1734-OE2C 1734-OE2V | 24V DC Analog 2 Channel Current Output Module Installation Instructions, publication 1734-IN002 |
| | 1734-OE4C | POINT I/O 4 Channel Analog Current Output Module Installation Instructions, publication 1734-IN034 |
| | 1734-IR2 1734-IR2E 1734-IT2I | POINT I/O RTD and Isolated Thermocouple Input Modules Installation Instructions, publication 1734-IN011 |
| Serial Interface Modules | 1734-232ASC/ 1734-485ASC | RS-232, -422, and -485 ASCII Modules Installation Instructions, publication 1734-IN388 RS-232, -422, and -485 ASCII Modules User Manual, publication 1734-UM009 |
| | 1734-SSI | Synchronous Serial Interface Module with Absolute Encoder Installation Instructions, publication 1734-IN581 Synchronous Serial Interface Module with Absolute Encoder User Manual, publication 1734-UM007 |
| | 1734-IK 1734-IJ | 5V and 24V Encoder/Counter Modules Installation Instructions, publication 1734-IN005 5V and 24V Encoder/Counter Module User Manual, publication 1734-UM006 |
| | 1734-VHSC5 1734-VHSC24 | 5V and 24V DC Very High Speed Counter Module Installation Instructions, publication 1734-IN003 5V and 24V DC Very High Speed Counter Module User Manual, publication 1734-UM003 |

| | Cat. No. | Description |
|--------------------|---|--|
| Bases | 1734-TB, 1734-TBS | Wiring Base Assembly with 8 Point Cage-Clamp Removable Terminal Block Installation Instructions, publication 1734-IN511 |
| | 1734-TBS, 1734-TB3S, 1734-RTBS, 1734-RTB3S | Wiring Base Assembly with 12 Point Cage-Clamp Removable Terminal Block Installation Instructions, publication 1734-IN013 |
| | 1734-TOP, 1734-TOPS, 1734-TOP3, 1734-TOP3S | POINT I/O One-piece Terminal Bases Installation Instructions, publication 1734-IN028 |
| | 1734-TBCJC | Cold Junction Compensation Wiring Base Assembly Installation Instructions, publication 1734-IN583 |
| Power Units | 1734-FPD | Field Potential Distributor Module Installation Instructions, publication 1734-IN059 |
| | 1734-EP24DC | 24V DC Expansion Power Supply Installation Instructions, publication 1734-IN058 |
| | 1734-EPAC | 120/240V AC Expansion Power Supply Installation Instructions, publication 1734-IN017 |
| Safety | 1734-IB8S, 1734-OB8S, 1734-IE4S | POINT Guard I/O Safety Modules Installation and User Manual, publication 1734-UM013 |

Notes:

Rockwell Automation Support

Rockwell Automation provides technical information on the Web to assist you in using its products.

At <http://www.rockwellautomation.com/support/>, you can find technical manuals, a knowledge base of FAQs, technical and application notes, sample code and links to software service packs, and a MySupport feature that you can customize to make the best use of these tools.

For an additional level of technical phone support for installation, configuration, and troubleshooting, we offer TechConnect support programs. For more information, contact your local distributor or Rockwell Automation representative, or visit <http://www.rockwellautomation.com/support/>.

Installation Assistance

If you experience a problem within the first 24 hours of installation, review the information that is contained in this manual. You can contact Customer Support for initial help in getting your product up and running.

| | |
|---------------------------------|--|
| United States or Canada | 1.440.646.3434 |
| Outside United States or Canada | Use the Worldwide Locator at http://www.rockwellautomation.com/support/americas/phone_en.html , or contact your local Rockwell Automation representative. |

New Product Satisfaction Return

Rockwell Automation tests all of its products to ensure that they are fully operational when shipped from the manufacturing facility. However, if your product is not functioning and needs to be returned, follow these procedures.

| | |
|-----------------------|---|
| United States | Contact your distributor. You must provide a Customer Support case number (call the phone number above to obtain one) to your distributor to complete the return process. |
| Outside United States | Please contact your local Rockwell Automation representative for the return procedure. |

Documentation Feedback

Your comments will help us serve your documentation needs better. If you have any suggestions on how to improve this document, complete this form, publication [RA-DU002](#), available at <http://www.rockwellautomation.com/literature/>.

Rockwell Otomasyon Ticaret A.Ş., Kar Plaza İş Merkezi E Blok Kat:6 34752 İçerenköy, İstanbul, Tel: +90 (216) 5698400

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation NV, Pegasus Park, De Kleetlaan 12a, 1831 Diegem, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846

Publication 1734-SG001F-EN-P - September 2015

Supersedes Publication 1734-SG001E-EN-P - March 2013

Copyright © 2015 Rockwell Automation, Inc. All rights reserved. Printed in the U.S.A.