## **SIEMENS**

Data sheet 3RF2330-1AA04



Solid-state contactor 1-phase 3RF2 AC 51 / 30 A / 40  $^{\circ}\text{C}$  48-460 V / 24 V DC screw terminal

product brand name	SIRIUS
product designation	solid-state contactor
design of the product	single-phase
product type designation	3RF23
manufacturer's article number	
<ul><li>_1 of the accessories that can be ordered</li></ul>	3RF2900-3PA88
<ul><li>_3 of the accessories that can be ordered</li></ul>	3RF2900-0EA18
<ul><li>_4 of the accessories that can be ordered</li></ul>	3RF2950-0GA16
<ul> <li>_5 of the accessories that can be ordered</li> </ul>	3RF2920-0FA08
product designation	
<ul><li>_1 of the accessories that can be ordered</li></ul>	terminal cover
<ul><li>_3 of the accessories that can be ordered</li></ul>	converter
<ul><li>_4 of the accessories that can be ordered</li></ul>	load monitoring
<ul><li>_5 of the accessories that can be ordered</li></ul>	load monitoring, basis
General technical data	
product function	zero-point switching
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	33 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	33 W
<ul> <li>without load current share typical</li> </ul>	0.4 W
insulation voltage rated value	600 V
degree of pollution	3
type of voltage	
<ul> <li>of the operating voltage</li> </ul>	AC
of the control supply voltage	DC
surge voltage resistance of main circuit rated value	6 kV
protection class IP	IP20
protection class IP on the front according to IEC 60529	IP20
shock resistance according to IEC 60068-2-27	15g / 11 ms
vibration resistance according to IEC 60068-2-6	2g
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	07/01/2006
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Dibutylbis(pentane-2,4-dionato-O,O')tin - 22673-19-4
Weight	0.295 kg
Main circuit	
number of poles for main current circuit	1
number of NO contacts for main contacts	1
number of NC contacts for main contacts	0
type of voltage of the operating voltage	AC
type of voltage of the operating voltage	AU

operating voltage	
• at AC	
— at 50 Hz rated value	48 460 V
— at 60 Hz rated value	48 460 V
operating frequency rated value	50 60 Hz
operating range relative to the operating voltage at AC	
● at 50 Hz	40 506 V
• at 60 Hz	40 506 V
operational current	
at AC-51 rated value	30 A
• at AC-51 according to IEC 60947-4-3	22 A
according to UL 508 rated value	27 A
rate of voltage rise at the thyristor for main contacts maximum permissible	1 000 V/µs
blocking voltage at the thyristor for main contacts maximum permissible	1 200 V
reverse current of the thyristor	10 mA
derating temperature	40 °C
surge current resistance rated value	600 A
I2t value maximum	1 800 A²·s
Control circuit/ Control	
type of voltage of the control supply voltage	DC
control supply voltage 1 at DC rated value maximum permissible	30 V
control supply voltage 1 at DC	15 24 V
control supply voltage	
<ul> <li>at DC initial value for signal &lt;1&gt; detection</li> </ul>	15 V
at DC full-scale value for signal<0> recognition	5 V
control current at minimum control supply voltage	
• at DC	13 mA
control current at DC rated value	15 mA
ON-delay time	1 ms; additionally max. one half-wave
OFF-delay time	1 ms; additionally max. one half-wave
Auxiliary circuit	
type of switching contact	normally open contact (NO)
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Installation/ mounting/ dimensions	V
fastening method side-by-side mounting	Yes
fastening method	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
design of the thread of the screw for securing the equipment	M4
height	95 mm
width	45 mm
depth	135.5 mm
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
• for main current circuit	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• for main contacts	
— solid	2x (1.5 2.5 mm²), 2x (2.5 6 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
<ul> <li>for AWG cables for main contacts</li> </ul>	2x (14 10)
connectable conductor cross-section for main contacts	
<ul> <li>solid or stranded</li> </ul>	1.5 6 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	1 10 mm²
type of connectable conductor cross-sections	

for auxiliary and control contacts	4 (0 - 0 - 0) 0 (0 - 40 - 0)
— solid	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
<ul> <li>finely stranded without core end processing</li> </ul>	1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²)
for AWG cables for auxiliary and control contacts	1x (AWG 20 12)
AWG number as coded connectable conductor cross section for main contacts	10 10
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	2 2.5 N·m
<ul> <li>for auxiliary and control contacts with screw-type</li> </ul>	0.5 0.6 N·m
terminals	
tightening torque [lbf·in]	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	18 22 lbf·in
<ul> <li>for auxiliary and control contacts with screw-type terminals</li> </ul>	4.5 5.3 lbf·in
design of the thread of the connection screw	
• for main contacts	M4
	M3
of the auxiliary and control contacts	MIS
stripped length of the cable	7 mm
• for main contacts	7 mm
for auxiliary and control contacts    Clastical Cofets	7 mm
Electrical Safety	IDOO
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Ambient conditions	
installation altitude at height above sea level maximum	1 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-55 +80 °C
Electromagnetic compatibility	
conducted interference	
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV / 5 kHz behavior criterion 2
<ul> <li>due to conductor-earth surge according to IEC 61000-4-5</li> </ul>	2 kV behavior criterion 2
<ul> <li>due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	1 kV behavior criterion 2
<ul> <li>due to high-frequency radiation according to IEC 61000- 4-6</li> </ul>	140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1
field-based interference according to IEC 61000-4-3	80 MHz 1 GHz 10 V/m, behavior criterion 1
electrostatic discharge according to IEC 61000-4-2	4 kV contact discharging / 8 kV air discharging, behavior criterion 2
conducted HF interference emissions according to	Class A for industrial environment
CISPR11	
CISPR11 field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
	Class B for the domestic, business and commercial environments
field-bound HF interference emission according to CISPR11	Class B for the domestic, business and commercial environments
field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link	Class B for the domestic, business and commercial environments  3NE1803-0
field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number  • of gS fuse for semiconductor protection at NH design	
field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number  • of gS fuse for semiconductor protection at NH design usable • of full range R fuse link for semiconductor protection at	3NE1803-0
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  • of gS fuse for semiconductor protection at NH design usable  • of full range R fuse link for semiconductor protection at cylindrical design usable  • of back-up R fuse link for semiconductor protection at NH	3NE1803-0 5SE1335
field-bound HF interference emission according to CISPR11 Short-circuit protection, design of the fuse link manufacturer's article number  • of gS fuse for semiconductor protection at NH design usable  • of full range R fuse link for semiconductor protection at cylindrical design usable  • of back-up R fuse link for semiconductor protection at NH design usable  • of back-up R fuse link for semiconductor protection at NH design usable	3NE1803-0 5SE1335 3NE8003-1
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  of gS fuse for semiconductor protection at NH design usable  of full range R fuse link for semiconductor protection at cylindrical design usable  of back-up R fuse link for semiconductor protection at NH design usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at	3NE1803-0 5SE1335 3NE8003-1 3NC1032
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  of gS fuse for semiconductor protection at NH design usable  of full range R fuse link for semiconductor protection at cylindrical design usable  of back-up R fuse link for semiconductor protection at NH design usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at	3NE1803-0 5SE1335 3NE8003-1 3NC1032 3NC1450
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  of gS fuse for semiconductor protection at NH design usable  of full range R fuse link for semiconductor protection at cylindrical design usable  of back-up R fuse link for semiconductor protection at NH design usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable	3NE1803-0 5SE1335 3NE8003-1 3NC1032 3NC1450
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  of gS fuse for semiconductor protection at NH design usable  of full range R fuse link for semiconductor protection at cylindrical design usable  of back-up R fuse link for semiconductor protection at NH design usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable  manufacturer's article number of the gG fuse	3NE1803-0  5SE1335  3NE8003-1  3NC1032  3NC1450  3NC2263  3NA6807: These fuses have a smaller rated current than the semiconductor
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  of gS fuse for semiconductor protection at NH design usable  of full range R fuse link for semiconductor protection at cylindrical design usable  of back-up R fuse link for semiconductor protection at NH design usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable  manufacturer's article number of the gG fuse  at NH design usable	3NE1803-0  5SE1335  3NE8003-1  3NC1032  3NC1450  3NC2263  3NA6807: These fuses have a smaller rated current than the semiconductor relays 3NW6105-1: These fuses have a smaller rated current than the semiconductor
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  of gS fuse for semiconductor protection at NH design usable  of full range R fuse link for semiconductor protection at cylindrical design usable  of back-up R fuse link for semiconductor protection at NH design usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable  manufacturer's article number of the gG fuse  at NH design usable  at cylindrical design 14 x 51 mm usable	3NE1803-0  5SE1335  3NE8003-1  3NC1032  3NC1450  3NC2263  3NA6807: These fuses have a smaller rated current than the semiconductor relays 3NW6105-1: These fuses have a smaller rated current than the semiconductor relays 3NW6205-1: These fuses have a smaller rated current than the semiconductor relays
field-bound HF interference emission according to CISPR11  Short-circuit protection, design of the fuse link  manufacturer's article number  of gS fuse for semiconductor protection at NH design usable  of full range R fuse link for semiconductor protection at cylindrical design usable  of back-up R fuse link for semiconductor protection at NH design usable  of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable  of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable  manufacturer's article number of the gG fuse  at cylindrical design usable  at cylindrical design 14 x 51 mm usable  at cylindrical design 12 x 58 mm usable	3NE1803-0  5SE1335  3NE8003-1  3NC1032  3NC1450  3NC2263  3NA6807: These fuses have a smaller rated current than the semiconductor relays 3NW6105-1: These fuses have a smaller rated current than the semiconductor relays 3NW6205-1: These fuses have a smaller rated current than the semiconductor relays

relays

• of NEOZED fuse usable

5SE2320; These fuses have a smaller rated current than the semiconductor relays

## Approvals Certificates

**General Product Approval** 

EMV





Confirmation







**Test Certificates** 

other

Railway

Special Test Certificate

Type Test Certificates/Test Report

Confirmation



Special Test Certificate

## Further information

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2330-1AA04

Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2330-1AA04


 ${\bf Service \& Support~(Manuals,~Certificates,~Characteristics,~FAQs,...)}$ 


https://support.industry.siemens.com/cs/ww/en/ps/3RF2330-1AA04

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RF2330-1AA04&lang=en

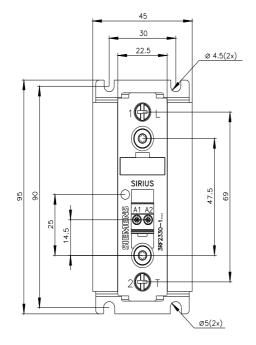

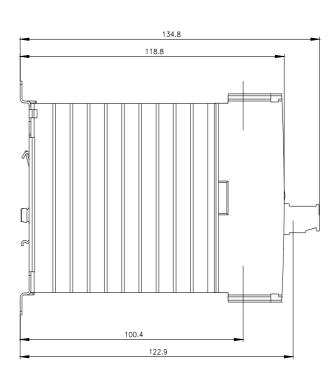

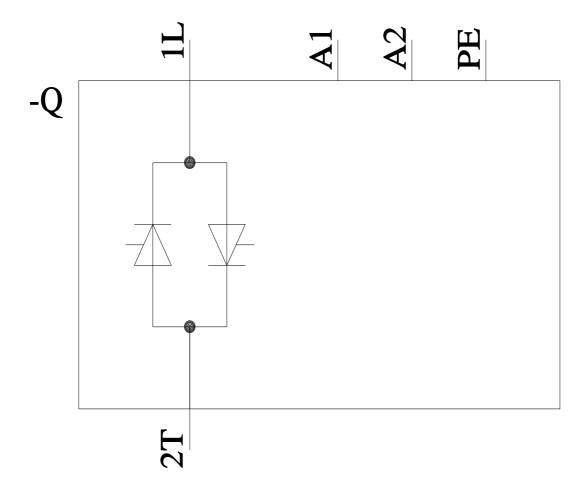

last modified: 8/12/2024 🖸