

Your **definitive** source for quality pre-owned equipment.

### **Artisan Technology Group**

(217) 352-9330 | sales@artisantg.com | artisantg.com

#### Full-service, independent repair center

with experienced engineers and technicians on staff.

We buy your excess, underutilized, and idle equipment along with credit for buybacks and trade-ins.

#### **Custom engineering**

so your equipment works exactly as you specify.

- Critical and expedited services
- Leasing / Rentals / Demos

In stock / Ready-to-ship

· ITAR-certified secure asset solutions

Expert team | Trust guarantee | 100% satisfaction


All trademarks, brand names, and brands appearing herein are the property of their respective owners.

Find the Schneider Electric / Gould / AEG DAP 218 at our website: Click HERE

# **DAP 216 Discrete Output Module**

The DAP 216 is a discrete output module with 16 independent 24 VDC output circuits. It can drive relays, motor starters, pilot lamps, valves, solenoids and other similar loads. The module is structured in two groups of eight outputs, each output electrically opto-isolated from the I/O bus, and each group is protected against short circuit and overload.

Figure 5-35 Wiring Diagram and Simplified Schematic for the DAP 216 Output Module

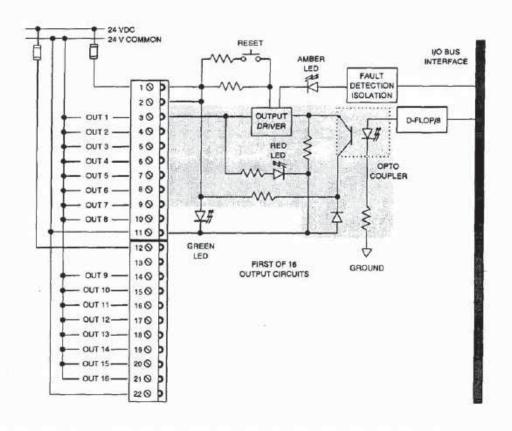


#### LED's

The DAP 216 has 20 LEDs. Two green LEDs opposite terminal screws 1 and 12 indicate when ON that working voltage is available to the two groups of eight discrete outputs. Two amber LEDs opposite terminal screws 2 and 13 are ON to indicate a short circuit or overload problem in each of the two output groups. There are 16 red LEDs opposite terminal screws 3 ... 10 and 14 ... 21, indicating when On that the adjacent discrete output is in an ON condition.

## Resetting the Module After an Overload or Short Circuit

The two amber LEDs display short circuit or overload conditions in the two discrete output groups. After taking corrective measures to remove the cause of the overload or short circuit, push the yellow reset button on the front of the module to reactivate it.

Figure 5-36 Front View of the DAP 216 Module with Reset Button Location

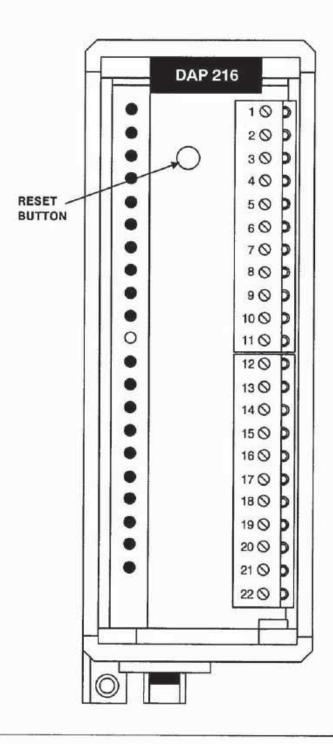


## Protecting the Module from Inductive Back EMF

If you have inductive loads on longer lines with logic elements located in the output loads, install an external clamping diode in parallel with the operating coil to protect the module from reverse EMF.

### **DAP 216 Characteristics**

Figure 5-37 Clamping Diode on an Inductive Load

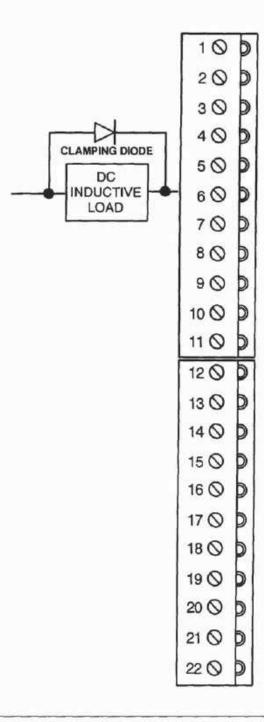

Module Topology

Number of Outputs 16 Number of Groups 2

Number of Groups Points/Group

Isolation

Each point opto-isolated from the I/O bus Each output group isolated from the other

Power Supplies

External Source Requirement

8

Internally Provided Source Internal Power Dissipation 24 VDC

5V from I/O Bus 1 Watts (Typical)

Electrical Characteristics

ON State Signal Level OFF State Signal Level Load Current/Output 21 ... 24 VDC 0 ... +2 V, < 1 mA 10 mA ... 0.5 A

2 A

Max Load Current/Group Reverse-EMF Protection

Built-in circuitry limits inductive

spikes to a max -15V

Switch Capacity for Bulbs

5 W

feur

(surge current = normal current x 10) 0.28/s (ind. load @ max load current)

100/s (resistive load)

Wire Size/Terminal

OFF-ON Operations

8/s (max lamp load) One Wire: 14 AWG; Two Wires: 20 AWG

**Addressing Characteristics** 

Discrete I/O Points (Bits)
Register I/O (registers)

0 in / 16 out 0 in / 1 out

Dimensions

WxHxD

40.3 x 145 x 117.5 mm (1.6 x 5.6 x 4.5 in.)

Weight

220 g (.5 lb.)

Agency Approvals

Designed to meet VDE 0160 and UL 508 Standards

# Artisan Technology Group is an independent supplier of quality pre-owned equipment

## **Gold-standard solutions**

Extend the life of your critical industrial, commercial, and military systems with our superior service and support.

# We buy equipment

Planning to upgrade your current equipment? Have surplus equipment taking up shelf space? We'll give it a new home.

### Learn more!

Visit us at artisantg.com for more info on price quotes, drivers, technical specifications, manuals, and documentation.

Artisan Scientific Corporation dba Artisan Technology Group is not an affiliate, representative, or authorized distributor for any manufacturer listed herein.

We're here to make your life easier. How can we help you today? (217) 352-9330 | sales@artisantg.com | artisantg.com

