


**DIN RAIL
POWER SUPPLIES**






*ELCOMTECH - бренд
премиального качества! Продукция
изготавливается с
применением уникальных технологий
и новейших материалов.
Главная цель компании сделать Hi-Rel
продукцию доступной для
общепромышленного применения.
Гарантия на продукцию до 10 лет.*

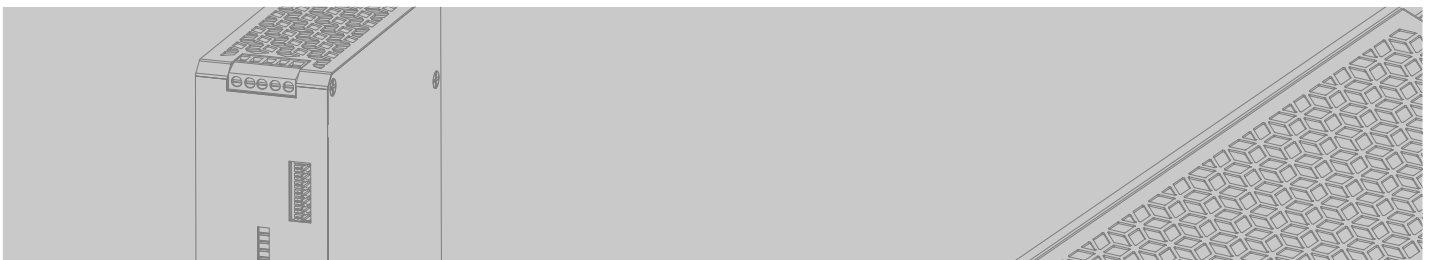

Higher peak power
 Built-in active PFC function
 Built-in DC OK relay contact
 DC output voltage adjustable
 100% full load burn-in test
 3 years warranty

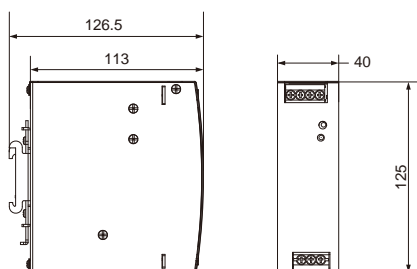Dimensions:(mm)

Safety Standard:

UL 61010
 IEC 61010-1
 BS EN/EN 61010-1

EMC Standard:

EN 55032
 EN 61000-3-2,-3
 EN 61000-4-2,3,4,5,6,8,11


Electrical Characteristics

Model No.	ADSDR-120-12	ADSDR-120-24	ADSDR-120-48
DC Voltage	12V	24V	48V
Rated Current	10A	5A	2.5A
Rated Power(Max)	120W	120W	120W
Peak Power	180W (3sec.)		
Ripple & Noise(Max)	100mVp-p	100mVp-p	120mVp-p
Input Voltage	90 ~ 264VAC 127 ~ 370VDC		
Inrush Current	35A/115VAC 70A/230VAC		
Efficiency	89%	91%	90 %
Working Temperature	-25 ~ +70 °C (Refer to "Derating Curve")		
Withstand Voltage	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC		
Protection	Short Circuit / Over Load / Over Voltage / Over Temperature		
Connection	I/P :3 poles terminal Block O/P: 4 poles terminal Block		