

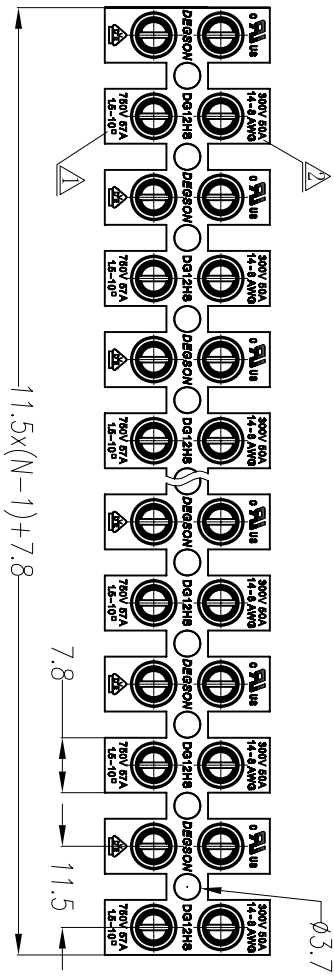


REVISION RECORD			
REV	ECD	DESCRIPTION	DR-T DATE
Δ		增加UL,CCC认证及结构修改	Zengyi 06/30/05*
Δ		修改UL参数	Zengyi 07/14/09*

- Notes:
- Pitch:11.5mm , Poles:2-12P
 - Rated voltage/current:UL 300V/50A
VDE 750V/57A
 - Operation temperatures:-40°C~+105°C
 - Withstanding Voltage:AC3000V/1Min
 - Insulation Resistance:5000MΩ/DC1000V
 - Wire Range:14~8AWG, 1.5~10mm²
 - Max. Torque Value:M3, 5, 8, 16kgf.cm
 - Undimensioned Tolerances:

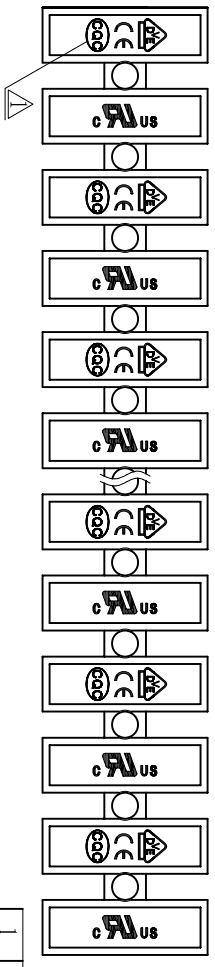

Pitch range in mm		Nominal dimension range in mm	
over	10	over	30
to	6	to	60
6	10	to	100
	24	to	150
±0.10	±0.15	±0.25	±0.3
		±0.5	±0.7
		±1.0	±0.005/10

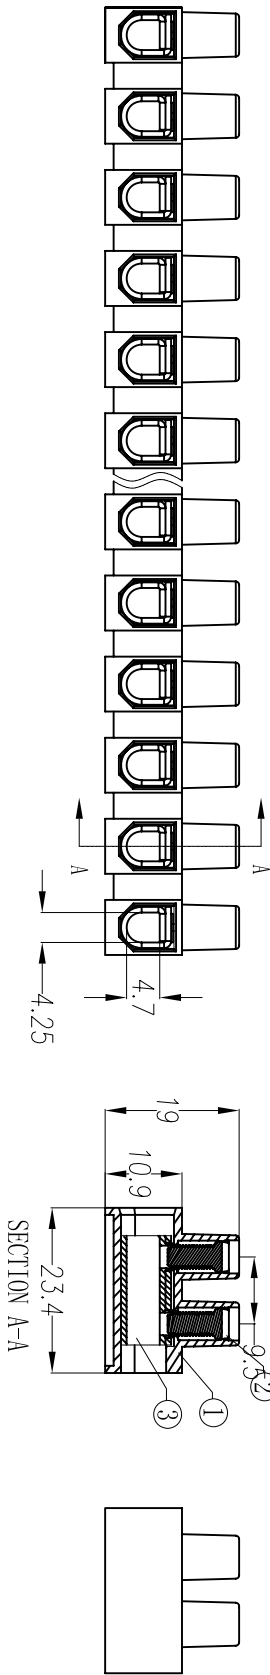

1	DEGSON	DG12HS HOUSING	2024A01XXXA(H)	1	PA66	UL94V-2
ITEM		NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS			
KM	INCH	DATE	DATE
CHKD		DATE	DATE
MPD		DATE	DATE
APPRV		DATE	DATE

TOLERANCES EXCEPT AS NOTED

MM: 0.05 ±, .00 ±, .000 ±, ±, ±, ±

ANGLES ± 1°

FINISH:

SCALE: 2

3	DGI2HS Current carrier	X000003280(H)	XX	Steel	Cp ² Zn
2	DGI2H Screws	S000001190(H)	2*XX	Steel	Cp ² Zn