


**DIN RAIL  
POWER SUPPLIES**






*ELCOMTECH - бренд  
премиального качества! Продукция  
изготавливается с  
применением уникальных технологий  
и новейших материалов.  
Главная цель компании сделать Hi-Rel  
продукцию доступной для  
общепромышленного применения.  
Гарантия на продукцию до 10 лет.*

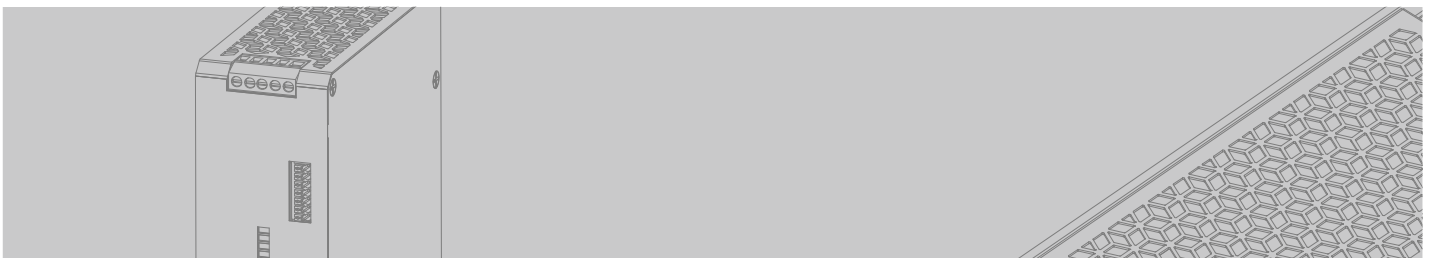

Universal AC input range  
 Class II isolation  
 Over voltage category III  
 DC output voltage adjustable  
 Installed on DIN rail TS-35/7.5 or 15  
 100% full load burn-in test  
 3 years warranty

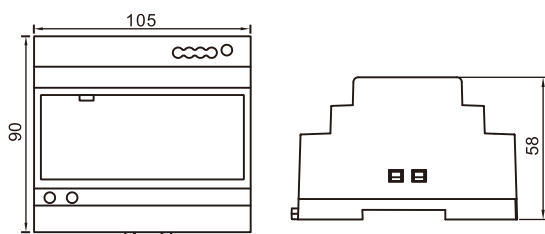**Dimensions:(mm)**

**Safety Standard:**

UL 62368-1  
 IEC 62368-1  
 BS EN/EN 62368-1

**EMC Standard:**

EN 55032  
 EN 61000-3-2,-3  
 EN 61000-4-2,3,4,5,6,8,11


**Electrical Characteristics**

Model No.	ADHDR-150-12		ADHDR-150-15		ADHDR-150-24		ADHDR-150-48	
DC Voltage	12V	12V	15V	15V	24V	24V	48V	48V
Rated Current	11.3A	10.2A	9.5A	8.55	6.25A	5.31A	3.2A	2.72A
Rated Power(Max)	135.6W/230V AC	122.4W/115V AC	142.5W/230V AC	128.3W/115V AC	150W/230V AC	127.4W/115V AC	153.6W/230V AC	130.6W/115V AC
Ripple & Noise(Max)	100mVp-p		120mVp-p		150mVp-p		200mVp-p	
Input Voltage	90 ~ 264VAC    127 ~ 370VDC							
Inrush Current	35A/115VAC    70A/230VAC							
Efficiency	89%		89.5%		90.5%		90.5%	
Working Temperature	-30 ~ +70 C (Refer to "Derating Curve")							
Withstand Voltage	I/P-O/P:4KVAC							
Protection	Short Circuit/Over Load/Over Voltage							
Connection	I/P: 2 poles terminal Block, O/P: 4 poles terminal Block							