


Category: 直插式弹簧接线/Plug-in terminal-plug

Product name: TP16-2-GY

Product Description: 12.2mm , 1000V , 76A CE,UL

Product Picture

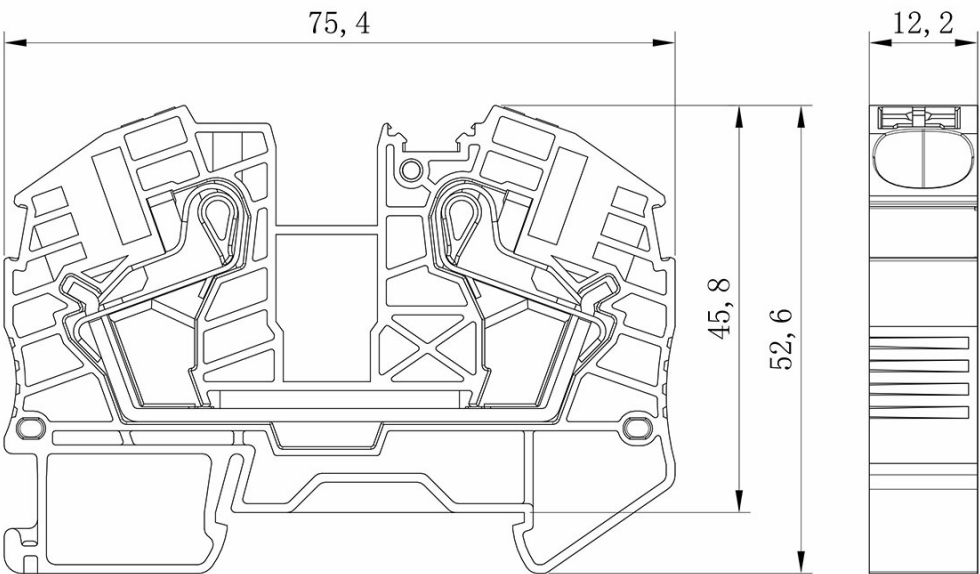

基本信息 /Basic Information

|                               |           |
|-------------------------------|-----------|
| 产品型号<br>SUPU ID               | TP16-2-GY |
| 宽度<br>Width                   | 12.2mm    |
| 产品层数<br>Number of levels      | 1         |
| 接线位数<br>Number of connections | 2         |
| 接线方式<br>Connection method     | 直插弹簧接线    |
| 防护等级<br>Protection Level      | IP20      |

|                  |           |
|------------------|-----------|
| 工作温度             | -40~+105℃ |
| Work temperature |           |

## IEC数据 /IEC Data

|                                               |                       |
|-----------------------------------------------|-----------------------|
| 额定电流                                          | 76A                   |
| Rated Current                                 |                       |
| 额定电压                                          | 1000V                 |
| Rated Voltage                                 |                       |
| 过压类别                                          | III                   |
| Overvoltage category                          |                       |
| 污染等级                                          | 3                     |
| Pollution degree                              |                       |
| 额定冲击电压                                        | 8KV                   |
| Rated impulse voltage                         |                       |
| 刚性导线截面积                                       | 0.5-25mm <sup>2</sup> |
| Conductor cross section solid                 |                       |
| 柔性导线截面积                                       | 0.5-16mm <sup>2</sup> |
| Conductor cross section flexible              |                       |
| 柔性导线截面积，带绝缘管套                                 | 0.5-16mm <sup>2</sup> |
| Conductor cross section flexible,with furrule |                       |
| 剥线长度                                          | 18mm                  |
| Stripping length                              |                       |

## UL数据 /UL Data

|                     |         |      |   |
|---------------------|---------|------|---|
| 使用组别                | B       | C    | D |
| Use group           |         |      |   |
| 额定电流                | 85A     | 85A  | - |
| Rated Current       |         |      |   |
| 额定电压                | 600V    | 600V |   |
| Rated Voltage       |         |      |   |
| 额定接线容量              | 20-4AWG |      |   |
| Rated cross section |         |      |   |

## 材料信息 /Material Data

|                             |      |
|-----------------------------|------|
| 绝缘材料                        | PA66 |
| Insulation material         |      |
| 绝缘材料组别                      | I    |
| Insulation material group   |      |
| 阻燃等级，符合UL94                 | V0   |
| Flame retardant grade, UL94 |      |
| compliance                  |      |

|                                    |              |
|------------------------------------|--------------|
| 导电体材料<br>Contact material          | Copper alloy |
| 导电体表面镀层<br>Surface characteristics | Sn,Plated    |

## 产品认证 /Product Certification

认证图标  
Certificate



UL证书号  
UL file No.

VDE证书号  
VDE No.

TUV证书号  
TUV No.

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi  
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

File date : 2024-09-13 15:03

Product Entry : 2024-04-12

The right to modify data belongs to  
Supu.