

92X92X25 mm

JF0925-00 Series





- **Frame** : Plastic Material UL 94V-0
- **Impeller** : Plastic Material UL 94V-0
- **Speed Range** : $\pm 10\%$

SPECIFICATIONS

Model	Bearing	Rated Voltage (V)	Operating Voltage (V)	Air Flow (CFM)	Static Pressure (inchH ₂ O)	Speed (R.P.M.)	Input Current (Amp)	Input Power (Watt)	Nominal Current (Amp)	Noise (dBA)	Weight (g)
JF0925-1URAC	B	12	10.2 ~ 13.8	71.80	0.247	3800	0.40	4.80	0.42	44.9	81
JF0925-1UR	B, H			67.65	0.204	3500	0.35	4.20	0.42	41.9	
JF0925-1SR	B, H, S			60.75	0.172	3200	0.31	3.72	0.32	38.9	
JF0925-1H	B, H, S			52.04	0.139	2800	0.25	3.00	0.35	35.1	
JF0925-1M	B, H, S			46.31	0.115	2500	0.17	2.04	0.20	32.0	
JF0925-1L	B, H, S			38.64	0.080	2100	0.13	1.56	0.16	27.6	
JF0925-1E	B, H, S			30.86	0.054	1700	0.09	1.08	0.10	23.1	
JF0925-2URAC	B	24	20.4 ~ 27.6	71.80	0.247	3800	0.24	5.76	0.24	44.9	
JF0925-2UR	B, H			67.65	0.204	3500	0.23	5.52	0.24	41.9	
JF0925-2SR	B, H, S			60.75	0.172	3200	0.18	4.32	0.18	38.9	
JF0925-2H	B, H, S			52.04	0.139	2800	0.15	3.60	0.19	35.1	
JF0925-2M	B, H, S			46.31	0.115	2500	0.11	2.64	0.15	32.0	
JF0925-2L	B, H, S			38.64	0.080	2100	0.08	1.92	0.13	27.6	
JF0925-2E	B, H, S			30.86	0.054	1700	0.06	1.44	0.07	23.1	
JF0925B4HR	B	48	40.8 ~ 55.2	52.04	0.139	2800	0.09	4.32	0.09	35.1	
JF0925B4MR				46.31	0.115	2500	0.08	3.84	0.08	32.0	
JF0925B4LR				38.64	0.080	2100	0.06	2.88	0.06	27.6	
JF0925B4ER				30.86	0.054	1700	0.05	2.40	0.05	23.1	

Specifications subject to change without notice

The 7TH character of Model No means the bearing code. Please refer to the page "PART NUMBER SYSTEM". Please contact us for detail if your request bearing system is not shown in the above list.

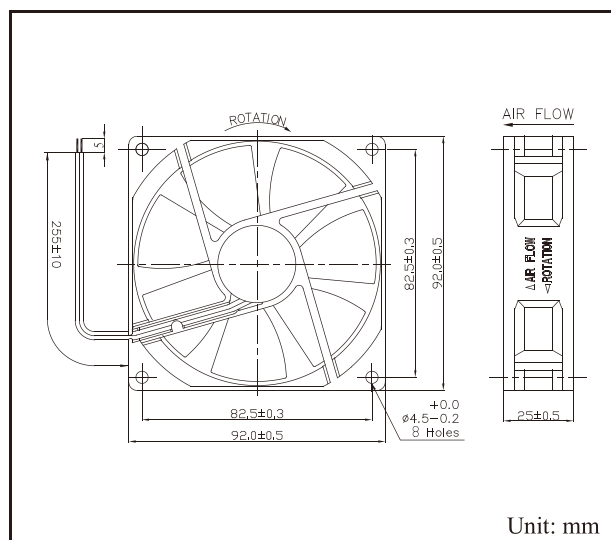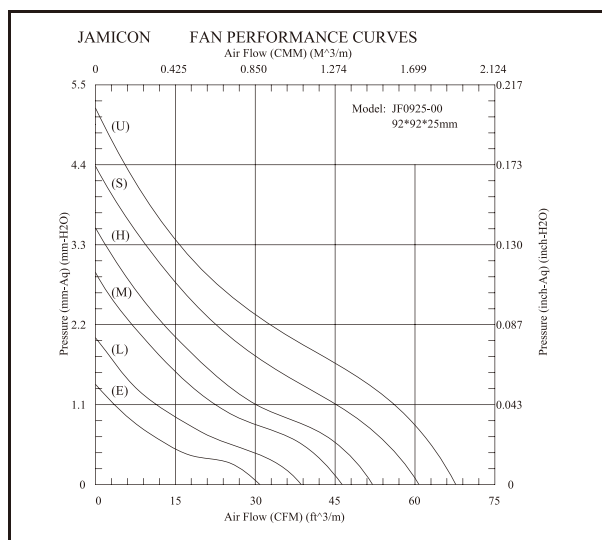

Unit: mm