



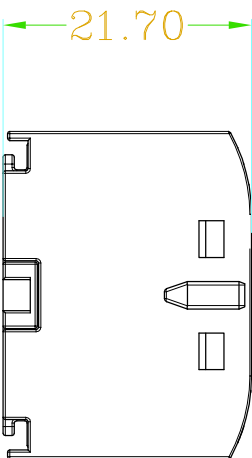

宁波速普电子有限公司  
NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书  
Product Specification

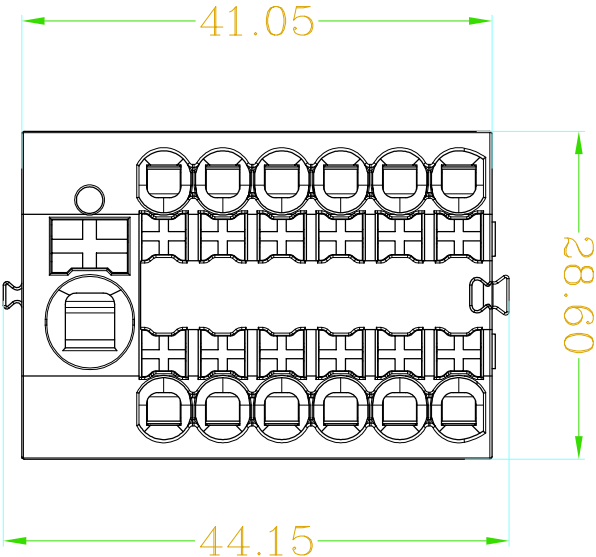

订货信息 Order Info

订货号	颜色
PART NUMBER	COLOR
TPA 6/2.5-13-GY	灰色 Gray
TPA 6/2.5-13-OG	橙色 Orange
TPA 6/2.5-13-BU	蓝色 Blue
TPA 6/2.5-13-GN	绿色 Green

未标注公差参照GB/T14486

基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46

IEC 额定数据/IEC Rated data		输入端/Input	输出端/Output
接线范围/Wire range		0.5-10mm²	0.2-4mm²
单股导线/Solid		0.5-10mm²	0.2-4mm²
软导线/Stranded		0.5-6mm²	0.2-2.5mm²
带端头软导线/Stranded with ferrules without plastic sleeve		0.5-6mm²	0.2-2.5mm²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve		0.5-6mm²	0.2-2.5mm²
额定电压/Rated voltage		500V	500V
额定电流/Rated current		41A	24A
剥线长度/Strip length		9-10mm	
额定脉冲耐受电压/Rated surge voltage		6kV	
污染等级/Pollution degree		2	
过电压类别/Surge voltage category		III	
UL 额定数据/UL Rated data	B	C	D
额定电流/Rated current	50A	50A	5A
额定电压/Rated voltage	300V	300V	600V
接线范围/Wire range	20-8	24-12	
其他信息/Other information			
塑件/Housing		PA66	
触点材料/Contact		铜合金/Copper alloy	
镀层/Coating		锡/Tin	
阻燃等级/Flame retardant rating		V0	
使用环境温度/Usage ambient temperature		-40℃ - +85℃	
导轨尺寸/rails Size		SP35X7.5/SP35X15	
认证/Approval			

	Rev. 01	Name
单位/Unit	mm	2.5mm <sup>2</sup> 直插式带输入13位配电块 Push-in type Power Distribution Block 2.5mm <sup>2</sup> 13 Bit