
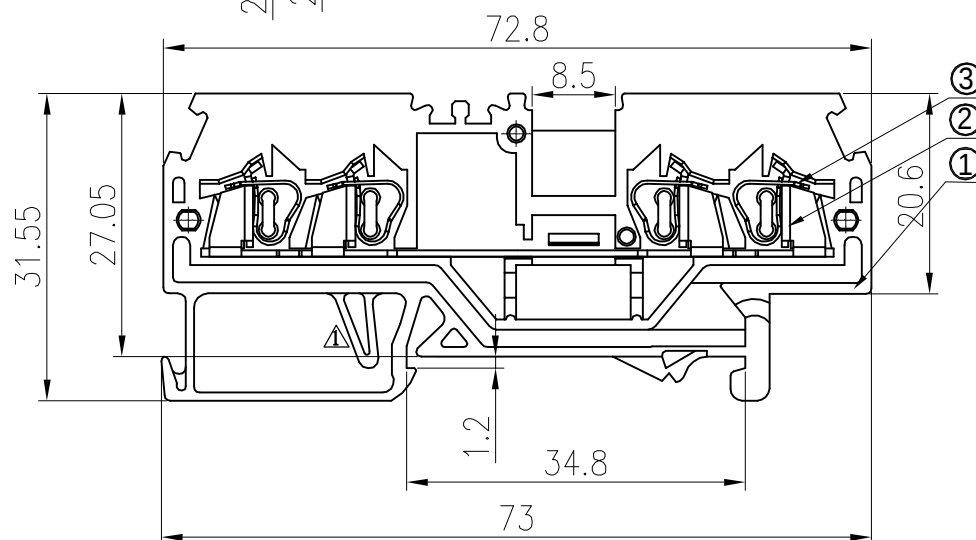
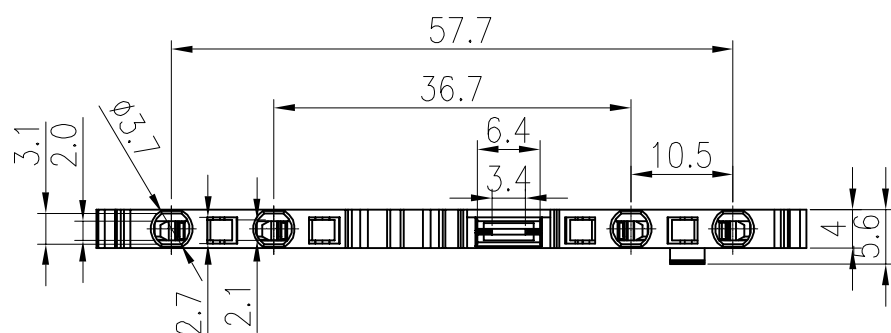



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加限位结构	CW	05/18/09

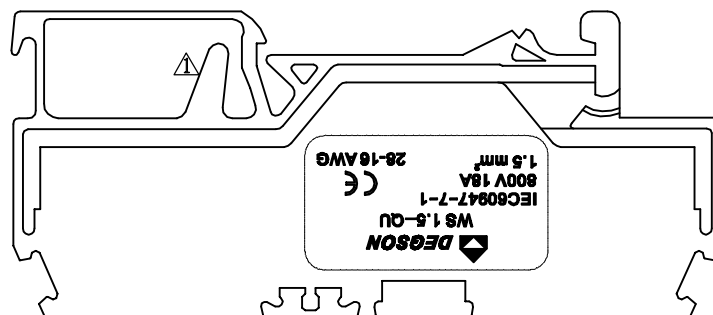

Notes:

- Rated voltage/current:UL1059 600V/10A
IEC 800V/18A
- Operation temperatures:-40℃~+105℃
- Withstanding Voltage:AC3000V/1Min
- Insulation Resistance:5000MΩ /DC1000V
- Wire Range:28~16AWG,1.5mm²
- Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▱
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	WS 1.5-Shrapnel	X000001700(H)	4	Stainless Steel										
2	WS 1.5-QU-Current Carrier	6139B00010(H)	1	Copper	Sn									
1	WS 1.5-QU-Housing	6139A0Y01A(H)	1	PA66	UL94V-0									
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES									
DETACHED LISTS	 MM (INCH)		DFTO Yangys		DATE 10/05/08"									
	TOLERANCES EXCEPT AS NOTED		CHKD		DATE									
			MFO		DATE									
			APPVL		DATE									
	<table><tr><td>MM</td><td></td></tr><tr><td>.0 ±</td><td>±</td></tr><tr><td>.00 ±</td><td>±</td></tr><tr><td>.000 ±</td><td>±</td></tr></table>		MM		.0 ±	±	.00 ±	±	.000 ±	±	MATERIAL :		NAME WS 1.5-QU-01P-1Y-00A(H)	
			MM											
			.0 ±	±										
	.00 ±	±												
	.000 ±	±												
ANGLES ± 1°		G.E :		DRAWING NO. WS 1.5-QU-E01										
		FINISH :		/PART NO.										
		SCALE :		DO NOT SCALE DRAWING										
THIRD ANGLE PROJECTION				SHEET 1 OF 1										