


**DIN RAIL
POWER SUPPLIES**






*ELCOMTECH - бренд
премиального качества! Продукция
изготавливается с
применением уникальных технологий
и новейших материалов.
Главная цель компании сделать Hi-Rel
продукцию доступной для
общепромышленного применения.
Гарантия на продукцию до 10 лет.*

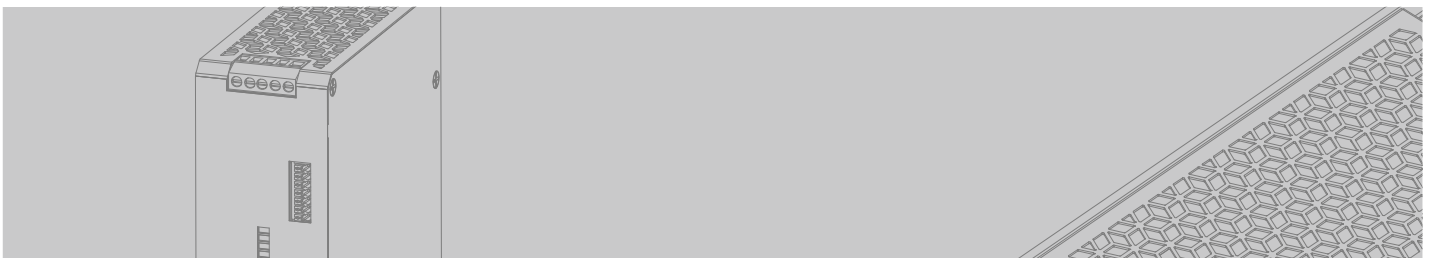

Current sharing up to 3840W(7+1)
 Higher peak power
 Built-in active PFC function
 Built-in DC OK relay contact
 DC output voltage adjustable
 100% full load burn-in test
 3 years warranty

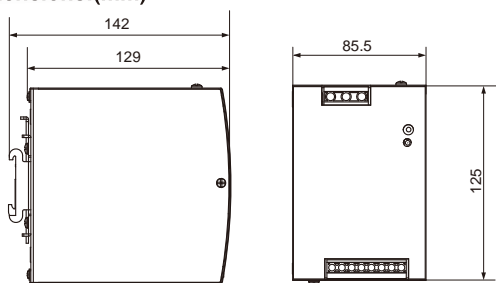Dimensions:(mm)

Safety Standard:

UL 61010
 IEC 61010-1
 BS EN/EN 61010-1

EMC Standard:

EN 55032
 EN 61000-3-2,-3
 EN 61000-4-2,3,4,5,6,8,11


Electrical Characteristics

Model No.	ADSDR-480-24	ADSDR-480-48
DC Voltage	24V	48V
Rated Current	20A	10A
Rated Power(Max)	480W	480W
Peak Power	720W (3sec.)	
Ripple & Noise(Max)	100mVp-p	120mVp-p
Input Voltage	90 ~ 264VAC 127 ~ 370VDC	
Inrush Current	40A/115VAC 80A/230VAC	
Efficiency	94%	
Working Temperature	-25 ~ +70 °C (Refer to "Derating Curve")	
Withstand Voltage	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC	
Protection	Short Circuit / Over Load / Over Voltage / Over Temperature	
Connection	I/P :3 poles terminal Block O/P: 8 poles terminal Block	