

Innovative and Powerful Features!

- ◆ True industrial grade design
- ◆ Rugged metal case for harsh industrial environments
- ◆ For worldwide use – Autoselect input and international safety approvals
- ◆ ATEX and IECEx certification (opt. EX)
- ◆ Model TSP 090-124N meets NEC class 2
- ◆ Industrial operating temperature range: –25 °C to +70 °C
- ◆ Variable output voltage
- ◆ Indefinite short circuit, overvoltage and overtemperature protection
- ◆ Power OK signal
- ◆ Remote On/Off
- ◆ Shock and vibration proof
- ◆ Wall mounting (opt.)
- ◆ Redundancy module
- ◆ Buffer module for power backup
- ◆ Battery controller module
- ◆ 3-year product warranty



The TRACOPOWER TSP series is a new generation of high performance DIN-rail mount power supplies designed to work reliably even under difficult factory floor conditions. A high power reserve guarantees reliable start-up of loads with high in-rush currents. Excellent electrical specifications and high immunity against electrical disturbances makes these compact modules the best choice to power sensitive loads in industrial process control systems, machine tools or other demanding industrial applications. Easy installation with detachable screw terminal block and snap-on mounting on DIN-rails.

For system applications all models offer a DC-OK signal and external shut down function. Redundant operation with true power sharing is available as an option. With another option these power supplies can be extended to build a perfect DC-UPS system with automatic battery management.

The TSP series power supplies complies with the latest safety and EMC standards for industrial environments and are also available with ATEX certification for applications in hazardous locations (class I, division 2)

Models			
*Order Code	Output Power (Pmax)	**Output Voltage (Vnom)	***Output Current (Imax)
TSP 070-112	78 W	12 VDC	6.5 A
TSP 090-124	90 W	24 VDC	3.75 A
TSP 090-124N	90 W	24 VDC	3.75 A
TSP 090-148	96 W	48 VDC	2.0 A
TSP 140-112	156 W	12 VDC	13.0 A
TSP 180-124	180 W	24 VDC	7.5 A
TSP 180-148	192 W	48 VDC	4.0 A
TSP 360-124	360 W	24 VDC	15.0 A
TSP 360-148		48 VDC	7.5 A
TSP 600-124	600 W	24 VDC	25.0 A
TSP 600-136		36 VDC	16.5 A
TSP 600-148		48 VDC	12.5 A

* For ATEX / IECEx compliant model add appendix -EX to order code (24 VDC models only)

** Output voltage adjustable 12–14 VDC, 24–28 VDC and 48–56VDC

*** Max. current at nominal output voltage and operating temperature up to 40 °C max.

Product Features**The Ultimate DIN - Rail Power Supply !**

Input Specifications

Input voltage range	85–132/87–264 VAC autoselect
– output current derating at operation below 100 VAC	see graph B, page 5
Input voltage frequency	47 – 63 Hz
Harmonic limits	EN 61000-3-2, Class A (for limited output power)
Holdup time	20 ms min. (full load 115/230 VAC)
Inrush current	115 VAC 230 VAC
– TSP 070/090	< 12 A < 20 A
– TSP 140/180	< 13 A < 25 A
– TSP 360	< 16 A < 25 A
– TSP 600	< 25 A < 30 A
Recommended circuit breaker, characteristic C or fuse, slow blow type	– TSP 070/090 6.0 A
	– TSP 140/180 6.0 A
	– TSP 360 10.0 A
	– TSP 600 15.0 A
Efficiency	87% typ.

Output Specifications

Output voltage adj. range	– 12 VDC models: 12 – 14 VDC
	– 24 VDC models: 24 – 28 VDC
	– 36 VDC model: 36 – 42 VDC
	– 48 VDC models: 48 – 56 VDC
	At output voltage higher than nominal output voltage max. output current has to be reduced accordingly, in order not to exceed max. output power.
Regulation	– Input variation 0.5 % max.
	– Load variation (10–100 %) 0.5 % max.
Ripple and Noise (20MHz Bandwidth)	100 mV pk-pk typ. (200 mV pk-pk max. at I _{max})
Electronic short circuit protection	current limitation at I _{max} . constant current, automatic recovery
Output overvoltage protection	– 12 VDC models: 20 V
	– 24 VDC models: 35 V
	– 36 VDC model: 43 V
	– 48 VDC models: 60 V
Overload protection	electronic overload protection
Overtemperature protection	switch off at overtemperature, automatic restart
Power back immunity	– 12 VDC models: 16 V
	– 24 VDC models: 35 V
	– 36 VDC model: 48 V
	– 48 VDC models: 63 V
Status indicator	dual color LED (green: DC ok, red: DC off)
Power OK signal	– trigger threshold: – 12 VDC models: 9–11 V
	– 24 VDC models: 18–22 V
	– 36 VDC models: 27–34 V
	– 48 VDC models: 36–46 V
	– active output signal: – 12 VDC models: 11.0 V ±1.0 V
	(reference to –V _{out}) (20 mA max. for TSP 070, 40 mA max. for TSP 140)
	– 24 VDC models: 22.0 V ±2.0V / 20 mA max.
	(10 mA max. for TSP 090, 20mA max. for others)
	– 36 VDC model: 34.0 V ±2.0V / 20 mA max.
	– 48 VDC models: 44.0 V ±4.0V / 15mA max.
	– relay output DC OK = contact closed
	rated: 30 VDC/1.0 A for 12/24 VDC models
	rated: 30 VDC/2.0 A for 36 VDC model
	rated: 48 VDC/0.5 A for 48 VDC models



General Specifications

Max. capacitive load	unlimited
Operating temperature range	–25 °C to +70 °C max. (–13 °F to +158°F) (for derating see graph A on page 5)
Cooling	convection cooling, no internal fan
Storage temperature	–25 °C to +85 °C (–13°F to +185°F)
Humidity (non condensing)	95 % rel. H max.
Pollution degree	2
Temperature coefficient	0.02 %/K
Reliability, calculated MTBF @ 25°C acc. to IEC 61709	<div>– TSP 070/090 >1.8 Mio h</div> <div>– TSP 140 >1.2 Mio h</div> <div>– TSP 180/360/600 >0.9 Mio h</div>
Remote On/Off	by ext. contact. DC on: -S contact open DC off: -S connected via 1Kohm to -Vout
Isolation	according to IEC/EN 60950-1, UL 60950-1, UL 508
Safety standards	<div>– Information technology equipment IEC/EN 60950-1, UL 60950-1, CSA-C22.2 No. 60950-1-03</div> <div>– Industrial control equipment UL 508, CSA-C22.2 No. 107</div> <div>– Electrical equipment for machines EN 60204</div> <div>– Electronic equipment for power installation EN 50178</div> <div>– Safety transformers for SMPS EN 61558-2-4</div> <div>– Limited power source (model TSP 090-124N) EN 60950 sect. 2.5 and NEC Class 2</div> <div>– Control equipment for hazardous location UL 60079-15 (Class I, Division 2, Groups A,B,C,D AEx n C II C T4 U) IEC/EN 60079-15 (Class I, Zone 2, EEx nC II C T4 U), (Ex) II 3G EEx nAC IIC T4 (T5 with limited power)</div>
Safety approvals and certifications	<div>– CB report for IEC/EN 60950-1 www.tracopower.com/products/tsp-cb.pdf</div> <div>– UL approvals UL 60950-1 rec. File: E181381, UL 508C listed File: E210002 www.ul.com -> certifications (file no. 219759) for UL 60950-1, UL 508, UL 60079-15-02, ANSI/ISA 12.12.01, CSA-22.2 No. 60950-1-03, CSA C22.2 No. 107, CSA 60079-15-02 www.tracopower.com/products/tsp-csa.pdf</div> <div>– (Ex) II 3G ATEX 94/9/EC certificate no. LCIE 07 ATEX 0004 U (option -EX only) www.tracopower.com/products/tsp-atex.pdf</div> <div>– IECEx scheme For IEC 60079-15 www.tracopower.com/products/tsp-iecex.pdf</div> <div>– GS certification for EN 60950-1, EN 60204, EN 61558-2-4 www.tracopower.com/products/tsp-gs.pdf</div>
Class of protection	safety class I (IEC 536)
Degree of protection	IP 20 (IEC/EN 60529)
Electromagnetic compatibility (EMC), Emissions	EN 61000-6-3, EN 61204-3 EN 55011 class B, EN 55022 class B, EN 55011 class B, EN 55022 class B,
Electromagnetic compatibility (EMC), Immunity	EN 61000-6-2, EN 61204-3 <div>– Electrostatic discharge (ESD) IEC / EN 61000-4-2 4 kV / 8 kV criteria B</div> <div>– Radiated RF field immunity IEC / EN 61000-4-3 10 V / m criteria B</div> <div>– Electrical fast transient / burst immunity IEC / EN 61000-4-4 2 kV criteria B</div> <div>– Surge immunity IEC / EN 61000-4-5 1 kV / 2 kV criteria B</div> <div>– Immunity to conducted RF disturbances IEC / EN 61000-4-6 10 V criteria B</div> <div>– Power frequency field immunity IEC / EN 61000-4-8 30 A / m criteria B</div> <div>– Mains voltage dips and interruptions IEC / EN 61000-4-11 criteria B/C</div> <div>– Voltage sag immunity SEMI F47</div>
	www.tracopower.com/products/TSP_SemiF47.pdf

General Specifications

Environment	<ul style="list-style-type: none"> – Vibration acc. IEC 60068-2-6; – Shock acc. IEC 60068-2-27 	3 axis, sine sweep, 10–55 Hz, 1 g, 1 oct/min 3 axis, 15 g half sine, 11 ms
Enclosure material		aluminium (chassis) / stainless steel (cover)
Mounting	<ul style="list-style-type: none"> – DIN-rail mounting – Wall mounting (option) 	for DIN-rails as per EN 50022-35x15/7.5 (snap-on with self-locking spring) with wall mounting bracket - see page 12
Connection		detachable screw terminals (plugs included) 2 terminals per output
Installation instructions		www.tracopower.com/products/tsp_inst.pdf

Output Power Derating

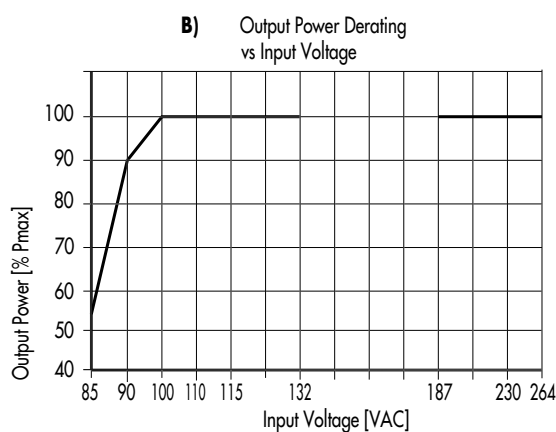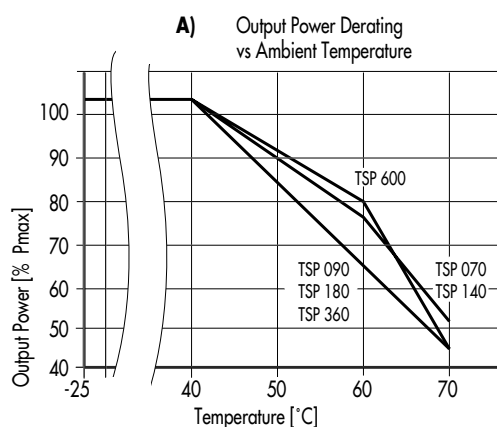

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

TSP-REM360 Redundancy Module


With this module and two power supplies of the TSP series (of same type) a highly reliable, truly redundant power system can be configured without any additional components. This module enforces the equivalent sharing of the output current by each power supply. The system is fully redundant and provides output power even if one power supply has completely failed e.g. by short circuit on the output. In the event of either power supply failing or being disconnected, the second unit will automatically supply the full current to the load. The redundancy of the system is monitored and if lost, indicated by an alarm output. The inputs are hot swappable and can be loaded up to 15 A each.




Models

Order Code (includes terminal plugs)	Input	Max Power per Input	Output Voltage adjust.	Output Power max.
TSP-REM360	2 x 24 VDC	2 x 360 W	24 VDC (24–27 VDC)	360 W
TSP-REM600	2 x Control input	2 x 600 W		600 W

Function Diagram

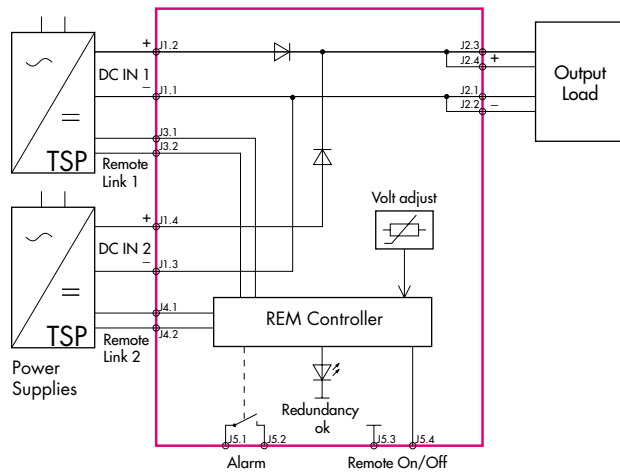

Connector Positions

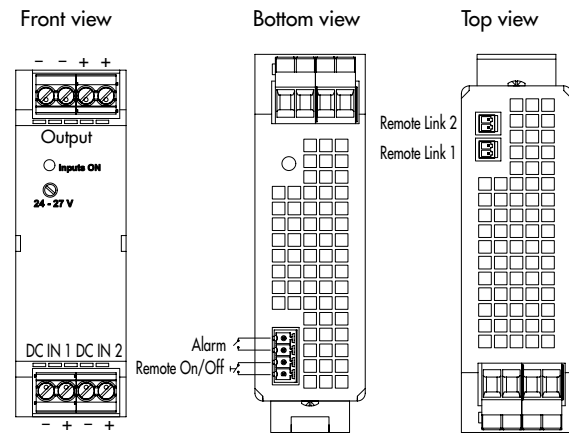

Specifications

Operating temperature	– 25 °C to 70 °C max. (–13 °F...+158 °F) derating above 40 °C (104 °F): 1.5 %/K
Electromagnetic compatibility	in correspondence to connected units (no internal switching device)
Redundancy OK signal (Alarm)	trigger threshold at 18...22VDC, contact open if both inputs failed
Dimensions	see page 10
Remote link cable (0.5m)	2 cables included with TSP-REM360 module
Remote On/Off	by ext. contact: contact open = On, contact closed = Off
Installation instructions	www.tracopower.com/products/tsp-rem_inst.pdf

TSP-BFM24 Buffer Module


The TSP-BFM24 buffer module will hold the output voltage of a 24 VDC power supply after brown outs or voltage dips of up to ten full 50 Hz cycles. During this buffer period no deterioration of the 24 VDC output voltage will occur. For many applications this buffer module is an ideal and cost effective alternative to a battery based backup system. The buffer module consists of a large bank of capacitors. When the power supply is switched on, the buffer capacitors will be charged. This will take approximately 30 second and an opto-coupler signal indicates the "READY" condition. When a power fail occurs, the capacitor bank is discharged, maintaining the output of the buffer module at its nominal voltage. This condition is indicated by an "POWER FAIL" signal. The hold up time is typically 200 ms at 25 A and 4 seconds typically at 1,2 A. After 4 seconds the buffer device will switch off the output voltage. The operating modes of the module are also indicated by a LED on the front panel also. The major advantage of this buffer solution is, that it is fully maintenance free and its storage capability does not deteriorate over the live time of the product.




Models

Order code (includes terminal plugs)	Operating Voltage Range	Buffer Time	Output Power max.
TSP-BFM24	24...28VDC	200ms typ. @ 25A max. 4.0 s max. @ 1.2A	600 W

Function Diagram

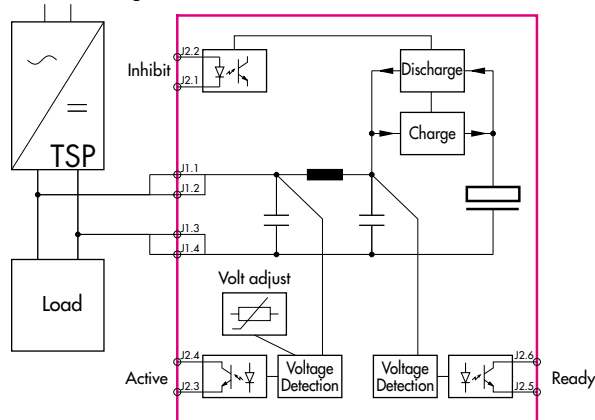

Connector Positions

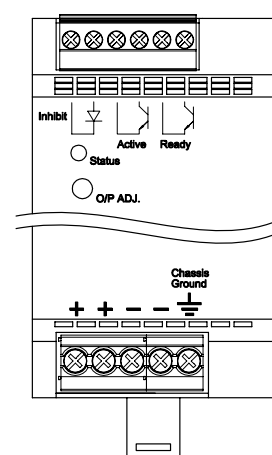

Specifications

Operating temperature	– 25 °C to 70°C max. (–13°F to 158 °F) derating above 40 °C (104 °F): 1.5 %/K
Electromagnetic compatibility	in correspondence to connected units (no internal switching device)
Buffer voltage	adjustable, >1V below input voltage, min. 22VDC
Charging	0.6A max. / 30s max.
Status signals	Buffer Active , Buffer Ready (optocoupler output) and dual colour LED for status indication
Inhibit	optocoupler input: 35V max. <5mA
Dimensions	see page 10
Installation instructions	www.tracopower.com/products/tsp-bfm_inst.pdf

TSP-BCM24 Battery Controller Module

This module provides a professional battery management system to charge and monitor an external lead-acid battery. Together with a power supply of the TSP series, a perfect DC-UPS system can be configured. The connected battery will be charged and held in charged mode by the power supply. In the event of a mains power failure the battery will supply the output power until the battery is discharged. As a consequence, the output voltage of the system is equivalent to the battery voltage. To avoid overcharging the battery, an external temperature sensor adjusts the battery voltage automatically to the required end of charge voltage. This can extend the battery life.

The battery is protected against deep discharge. Mains power and battery status are monitored regularly and failures indicated by corresponding LED's and alarm outputs. The module also provides an external On/Off input to switch-off both, power supply and battery.




Models


Order code (includes terminal plugs)	Inputs	Input Power max	Output Voltage nom.	*Output Power max.
TSP-BCM24	24 VDC Power Supply and 24 VDC Battery	360 W	24 VDC	360 W
TSP-BCM24H		600 W		600 W

*reduce max. output current by battery charging current

Function Diagram

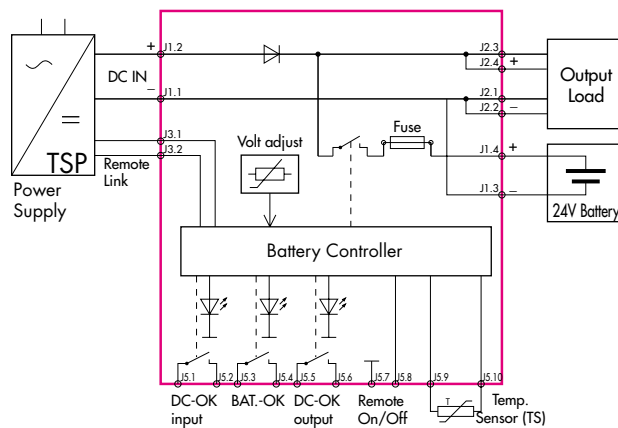

Connector Positions

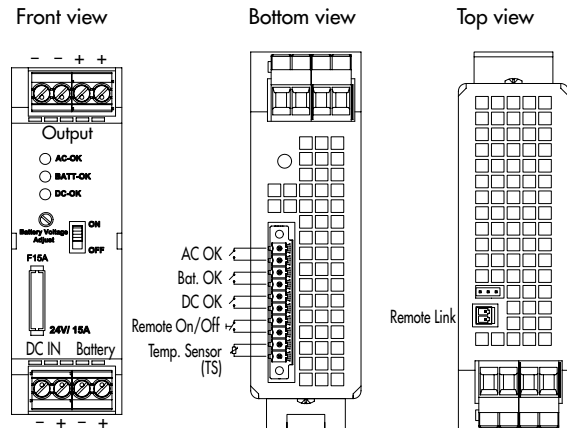

Specifications

Operating temperature	– 25°C to 70 °C max. (–13 °F to +158 °F) derating above 40 °C (104 °F): 1.5 %/K
Electromagnetic compatibility	in correspondence to connected units (no internal switching device)
Battery protection	against over voltage, deep discharge, overcharge, short circuit and reverse connection (built-in fuse)
Status signals	DC OK input, DC OK output, BAT OK all relay contact closed at status OK
Rating per relay contact	30 VDC/1.0 A max.
Dimensions	see page 10
Remote link cable (0.5 m)	1 cable included with TSP-BCM24 module
Remote On/Off	by ext. contact: contact open = On, contact closed = Off
Installation instructions	www.tracopower.com/products/tsp-bcm_inst.pdf







TSP–BAT Battery Pack

The TSP battery packs are designed to build, in connection with the TSP-BCM battery controller module, a complete DC-UPS system. The entire range utilizes 12 V maintenance free VRLA (valve regulated lead acid) batteries made by PANASONIC. These are not spillable lead gel type batteries. Two 12 V batteries are connected in series and assembled into a stainless steel enclosure, with integrated connector and connection cable.



Models

Order code (includes mating connectors)	Nominal Voltage	Charge current max.	Nominal Capacity (at 25°C, 77°F)
TSP-BAT24-034	24 VDC	0.80 A	3.4 Ah
TSP-BAT24-072		1.75 A	7.2 Ah
TSP-BAT24-120		3.00 A	12.0 Ah



Detailed drawings in process

Specifications

Temperature ranges (max)	<ul style="list-style-type: none"> – during discharge – when charging / charged – storage 	–15 °C to +50 °C max. (5 °F to +122 °F) 0 °C to +40 °C max. (32 °F to +104 °F) –15 °C to +40 °C max. (5 °F to +104 °F)
Battery lifetime		3-5 years see general battery information for details: www.tracopower.com/products/tsp-panas_gen.pdf
Remote link cable		1 cable (0.5m) included
Weight	TSP-BAT24-034 TSP-BAT24-072 TSP-BAT24-120	3.2kg (7.1lb) 5.8kg (12.9lb) 9.0kg (20.0lb)
Battery datasheets	TSP-BAT24-034 TSP-BAT24-072 TSP-BAT24-120	www.tracopower.com/products/tsp-panas_034.pdf www.tracopower.com/products/tsp-panas_072.pdf www.tracopower.com/products/tsp-panas_120.pdf


Outline Dimensions

Models:

TSP 070/090

TSP-REM360

TSP-BCM24

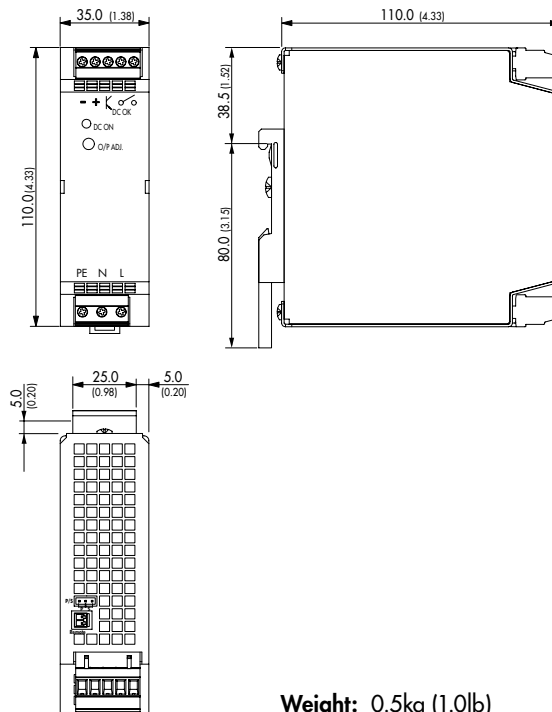

Weight: 0.5kg (1.0lb)


Models:

TSP 140/180

TSP-REM600

TSP-BCM24H

TSP-BFM24

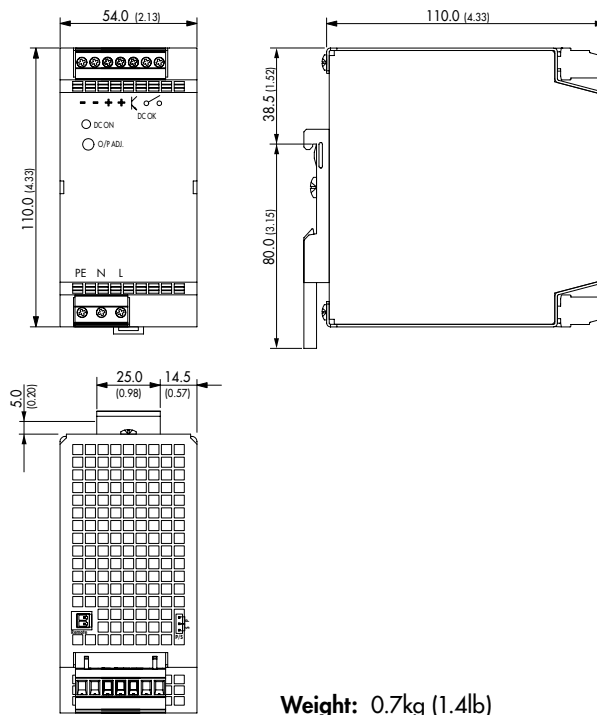


Weight: 0.7kg (1.4lb)

Dimensions in [mm], () = inch
Tolerances: ± 0.5 mm (± 0.02)

Outline Dimensions

TSP 360

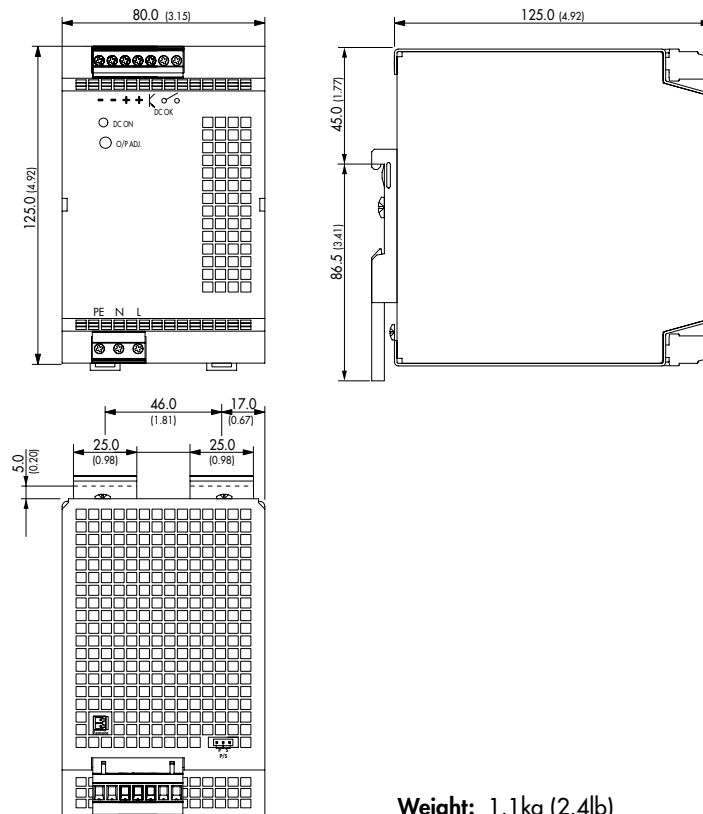


Weight: 1.1 kg (2.4 lb)

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 mm (± 0.02)

Outline Dimensions

TSP 600






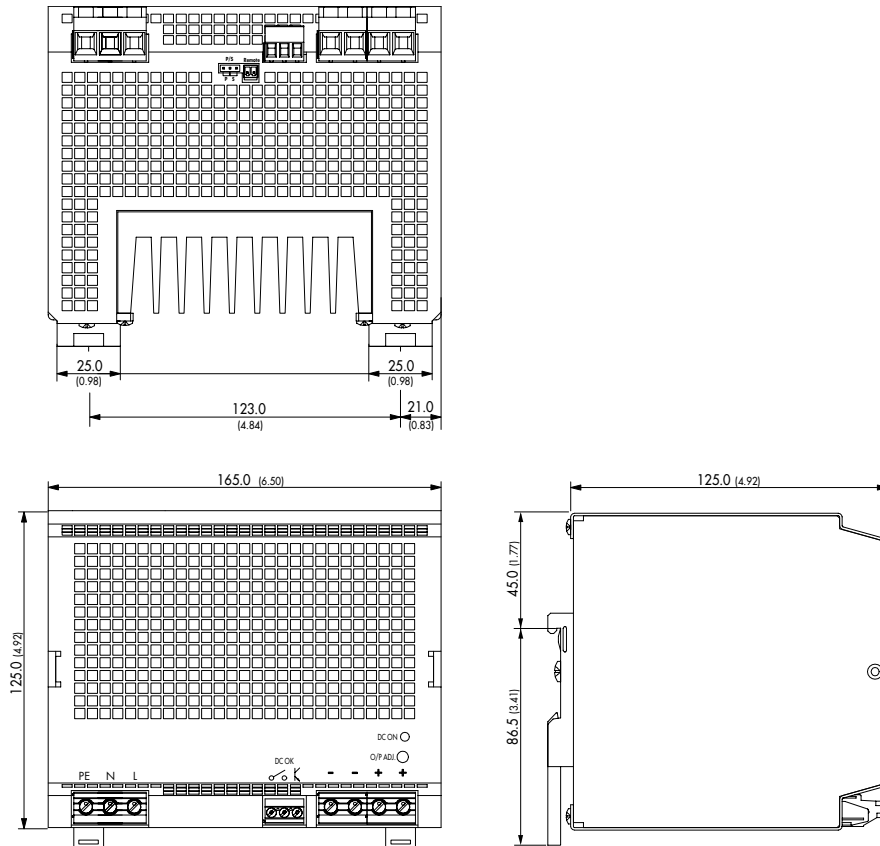


Weight: 2.8kg (6.0lb)

Dimensions in [mm], () = Inch
Tolerances: ± 0.5 mm (± 0.02)

TSP-WMK Wall Mounting Bracket

Ordercode of Kit	For Models	Content of Kit
TSP-WMK01	TSP 070, TSP 090, TSP 140, TSP 180	1 bracket type A
TSP-WMK02	TSP 360, TSP 600	2 brackets type B

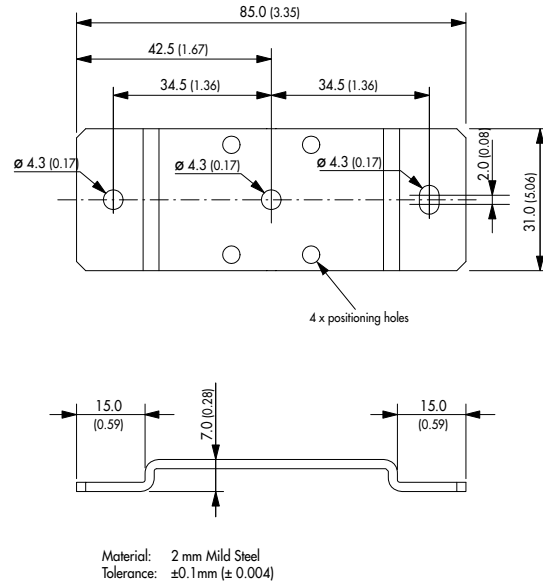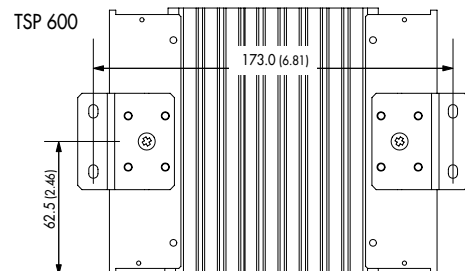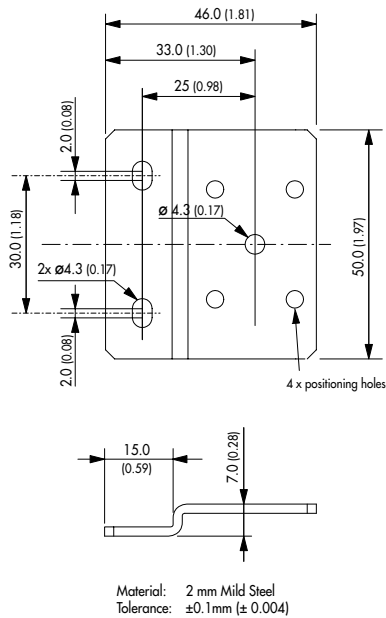Type A:

Type B:


Dimensions: [mm] () = Inch

Specifications can be changed any time without notice.

**TRACO
ELECTRONIC AG**

Jenatschstrasse 1 · CH-8002 Zurich · Switzerland
 Tel. +41 43 311 45 11 · Fax +41 43 311 45 45 · info@traco.ch · www.tracopower.com

Rev. 01/08