
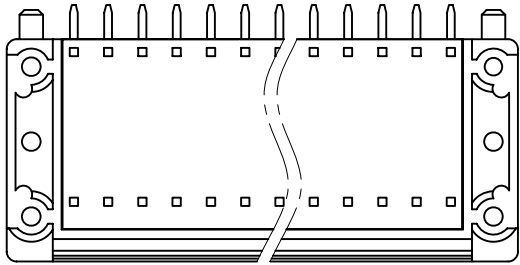
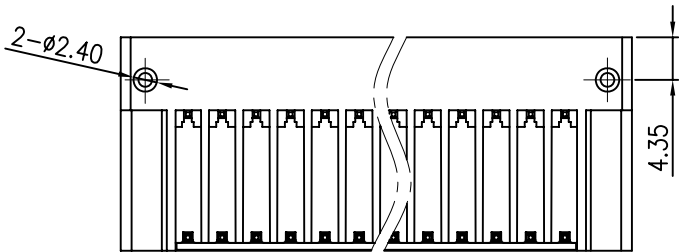

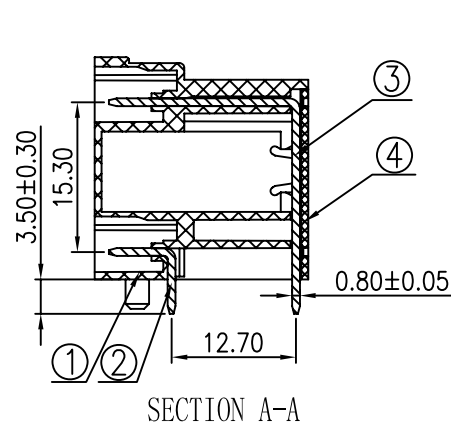



REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		品名、料号增加环保标示“(H)”	LJH	12/11/07
△		增加UL, CE刻字	Zengy	09/03/08
△		增加VDE及参数刻字	LJH	02/10/09

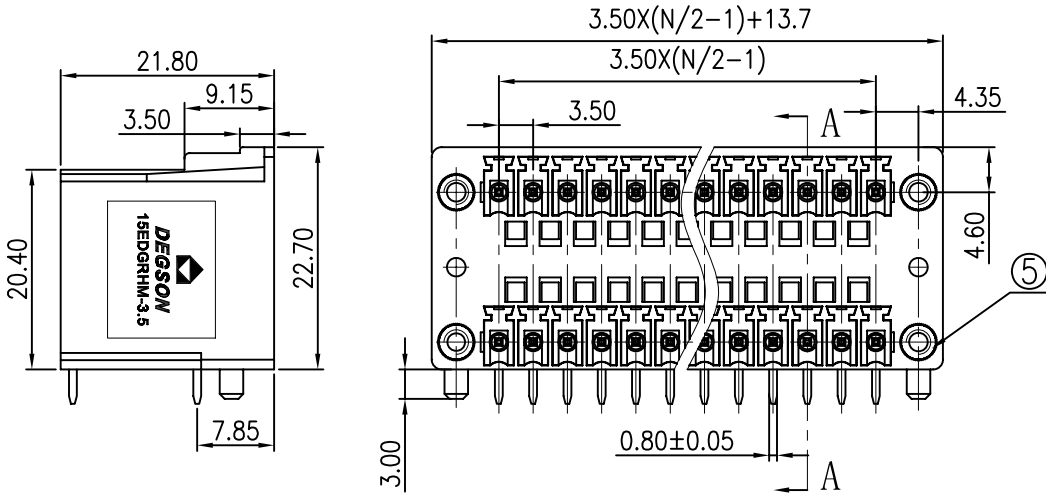

- Notes:
- Pitch:3.5mm , Poles:4-48P
 - Rated voltage/current:UL 300V/8A
VDE 250V/7A
 - Operation temperatures:-40℃~+105℃
 - Withstanding Voltage:AC2000V/1min
 - Insulation Resistance:5000MΩ/DC1000V
 - Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

5	2EDG-Screw cap	S000000040 (H)	4	Brass	
4	15EDGV/RH-Cover	1063C0YXXA (H)	1	PA66	UL94V-0
3	15EDGRH-Pin	1063B00020 (H)	XX/2	Brass	SeCn plated

2	15EDGRC-Pin	1003B00010 (H)	XX/2	Brass	SeCn plated
1	15EDGRHM-Housing	1079A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	 MM (INCH)		DF TO LYK	DATE 11/16/06	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME 15EDGRHM-3.5-XXP-1Y-00A (H) DRAWING NO. 15EDGRHM-3.5-E01 SIZE A3 REV T3 /PART NO. DO NOT SCALE DRAWING SHEET 1 OF 1
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
			MFD	DATE	
			APPVL	DATE	
			MATERIAL :		
			CHKD:		
			FINISH:		
			SCALE : 1:1		
 THIRD ANGLE PROJECTION					