


**DIN RAIL
POWER SUPPLIES**



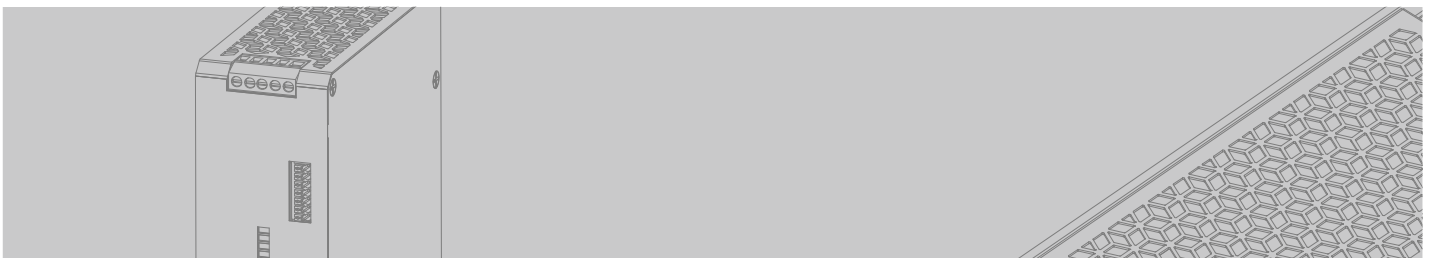

*ELCOMTECH - бренд
премиального качества! Продукция
изготавливается с
применением уникальных технологий
и новейших материалов.
Главная цель компании сделать Hi-Rel
продукцию доступной для
общепромышленного применения.
Гарантия на продукцию до 10 лет.*


ADNDR-75

DIN RAIL POWER SUPPLIES



Universal AC input range
DC output voltage adjustable
Installed on DIN rail TS-35/7.5 or 15
100% full load burn-in test
3 years warranty

Dimensions:(mm)

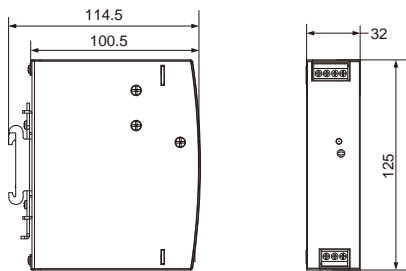

Safety Standard:

UL 61010
IEC 62368-1
BS EN/EN 62368-1

EMC Standard:

EN 55032
EN 61000-3-2,-3
EN 61000-4-2,3,4,5,6,8,11



Electrical Characteristics

Model No.	ADNDR-75-12	ADNDR-75-24	ADNDR-75-48
DC Voltage	12V	24V	48V
Rated Current	6.3A	3.2A	1.6A
Rated Power(Max)	75,6W	76,8W	76,8W
Ripple & Noise(Max)	80mVp-p	120mVp-p	150mVp-p
Input Voltage	90 ~ 264VAC 127 ~ 370VDC		
Inrush Current	20A/115VAC 35A/230VAC		
Efficiency	85,5%	87,5%	88,5%
Working Temperature	-20 ~ +70 C (Refer to "Derating Curve")		
Withstand Voltage	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC		
Protection	Short Circuit/Over Load/Over Voltage/Over Temperature		
Connection	I/P: 3 poles terminal Block, O/P: 4 poles terminal Block		