



△3 Date Code: X XX X
year day(1~7)
 week(1~52)

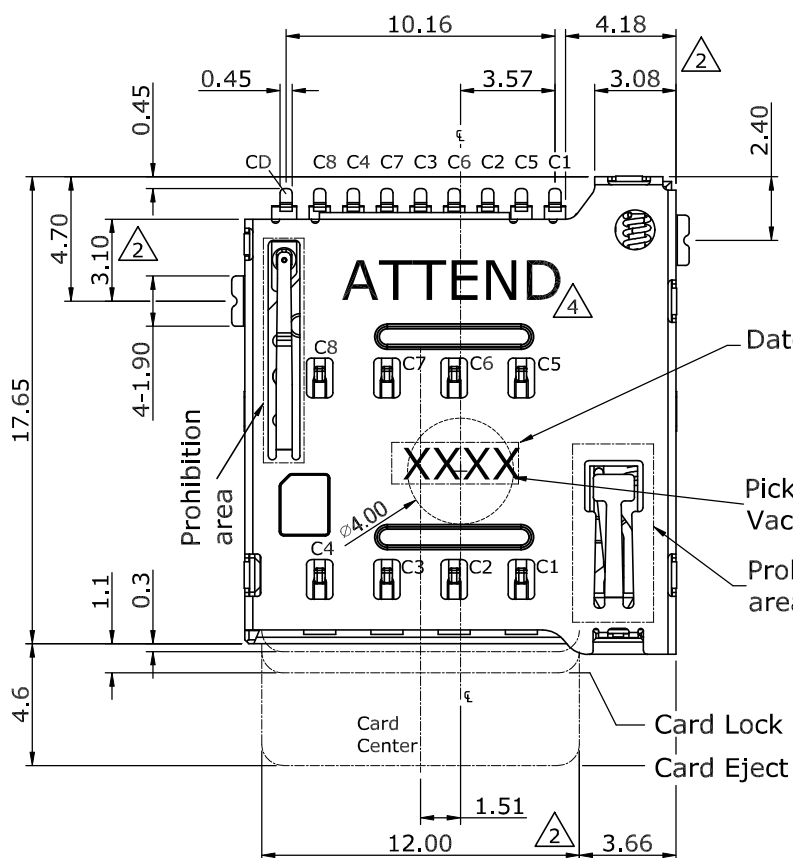


Prohibition area
High
H0.50

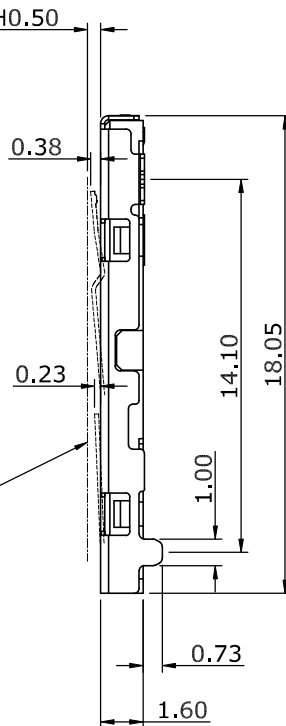

Date Code △3

Pick & Place
Vacuum Area

Prohibition
area

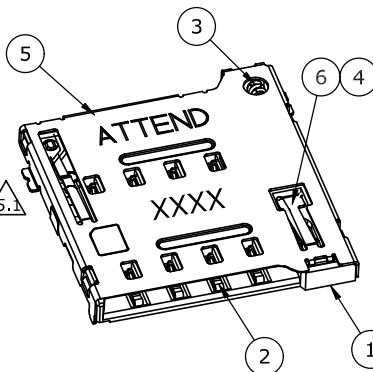

REV.	DESCRIPTION	DRAWN	DATE
5.1	Coplanarity 0.10mm	WEN	2021/09/23
5.2	ECR240507001	WEN	2024/05/07
6	ECR2500004	Fros	2025/07/10

SPECIFICATION:

1. ELECTRICAL

1.1 Current Rating: 0.5A DC/AC

1.2 Voltage Rating: 10V DC/AC

1.3 Contact Resistance:

C1~C8: 100mΩ Max.

CD: 140mΩ Max.

1.4 Insulation Resistance: 1000MΩ Min.

1.5 Dielectric Withstanding Voltage:
500VAC for 1 minute

2. MECHANICAL

2.1 Durability: 5,000 Cycle

2.2 Insertion Force: 10N Max.

2.3 Extraction Force: 0.5N Min.

3. ENVIRONMENTAL

3.1 Operating temperature range: -40℃~+85℃

3.2 Storage temperature range: -40℃~+85℃

△5 △2	6	SLIDER	LCP E130i, UL94V-0, Black
△5.2	5	SHELL	SUS304CSP-3/4H, 0.15t, 50u" nickel plated
	4	CRANK	SUS304 or SUS130M, 0.35d
	3	SPRING	SWP-B, 0.20d, 65u" nickel Plating over all
	2	CONTACT	C5210R-H, 0.12t, 5u" gold on contact area 1u" gold on tail area, under plated: 50u" nickel
	1	HOUSING	LCP E130i, UL94V-0, Black
	NO.	PART NAME	DESCRIPTION


UNLESS OTHERWISE SPECIFIED TOLERANCE


UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°




WWW.ATTEND.COM.TW

DRAWN	Fros	2014/11/24	DRAWN NAME:
CHECKED	Ron	2014/11/24	Micro SIM Card Socket push-push type
APPROVED	Albert	2014/11/24	PRODUCT NO. 115Q-BCA0
SCALE	3.5/1	SHEET 1/4	FILE NAME 115Q-BCA0_B_6
SIZE	A4		

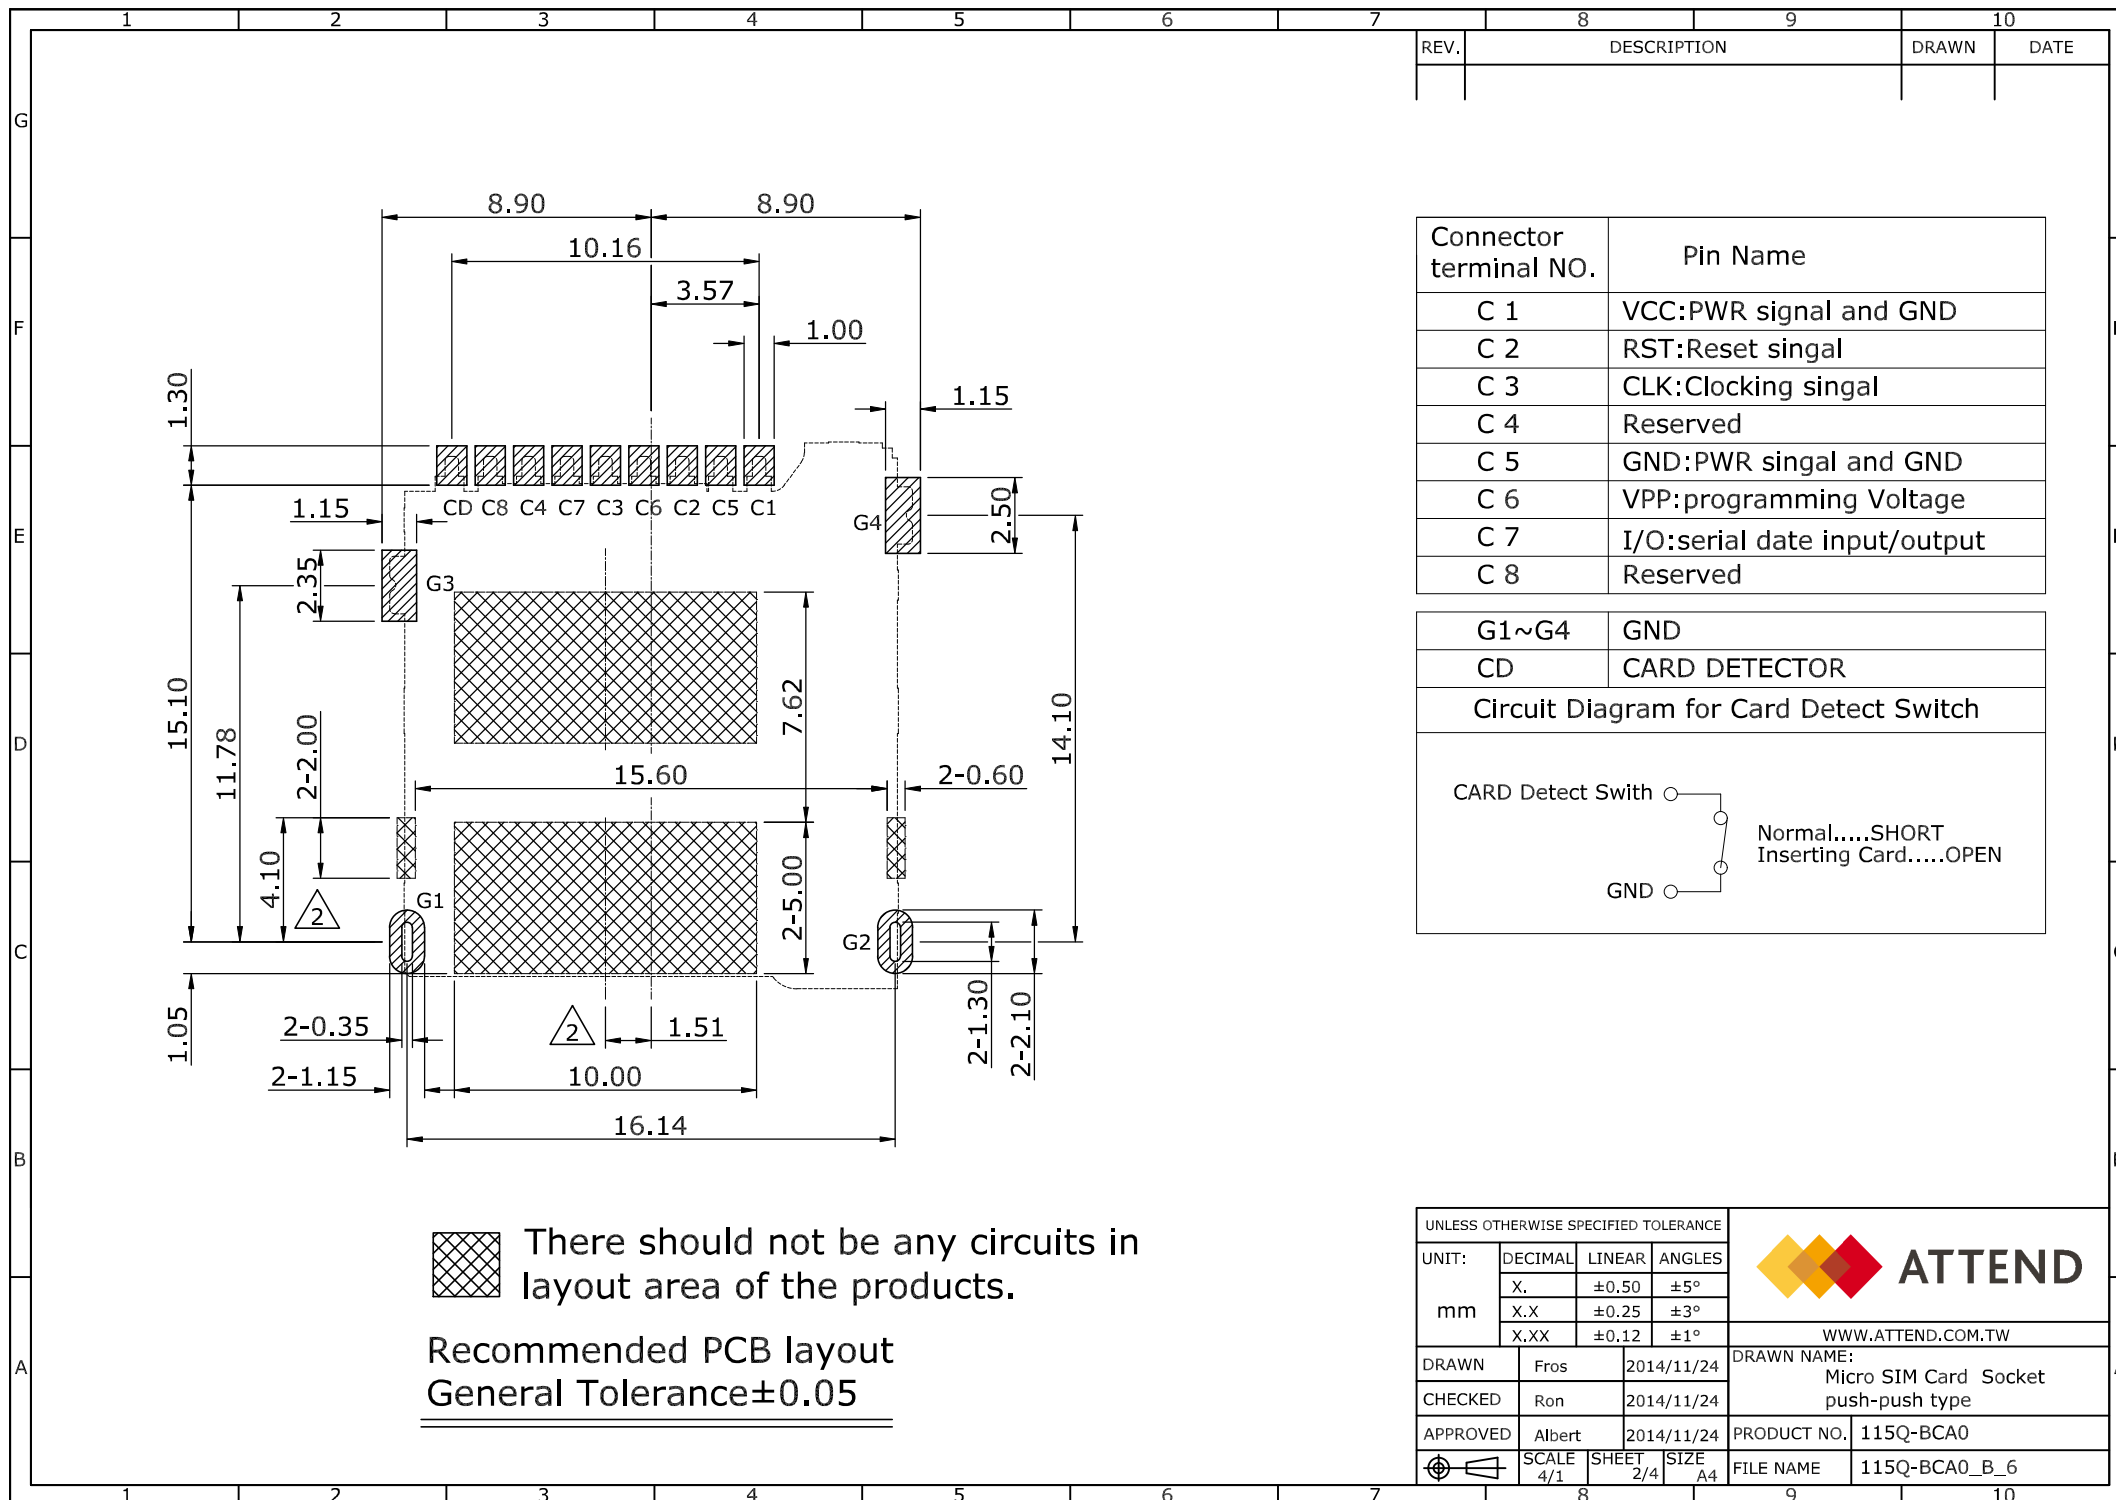

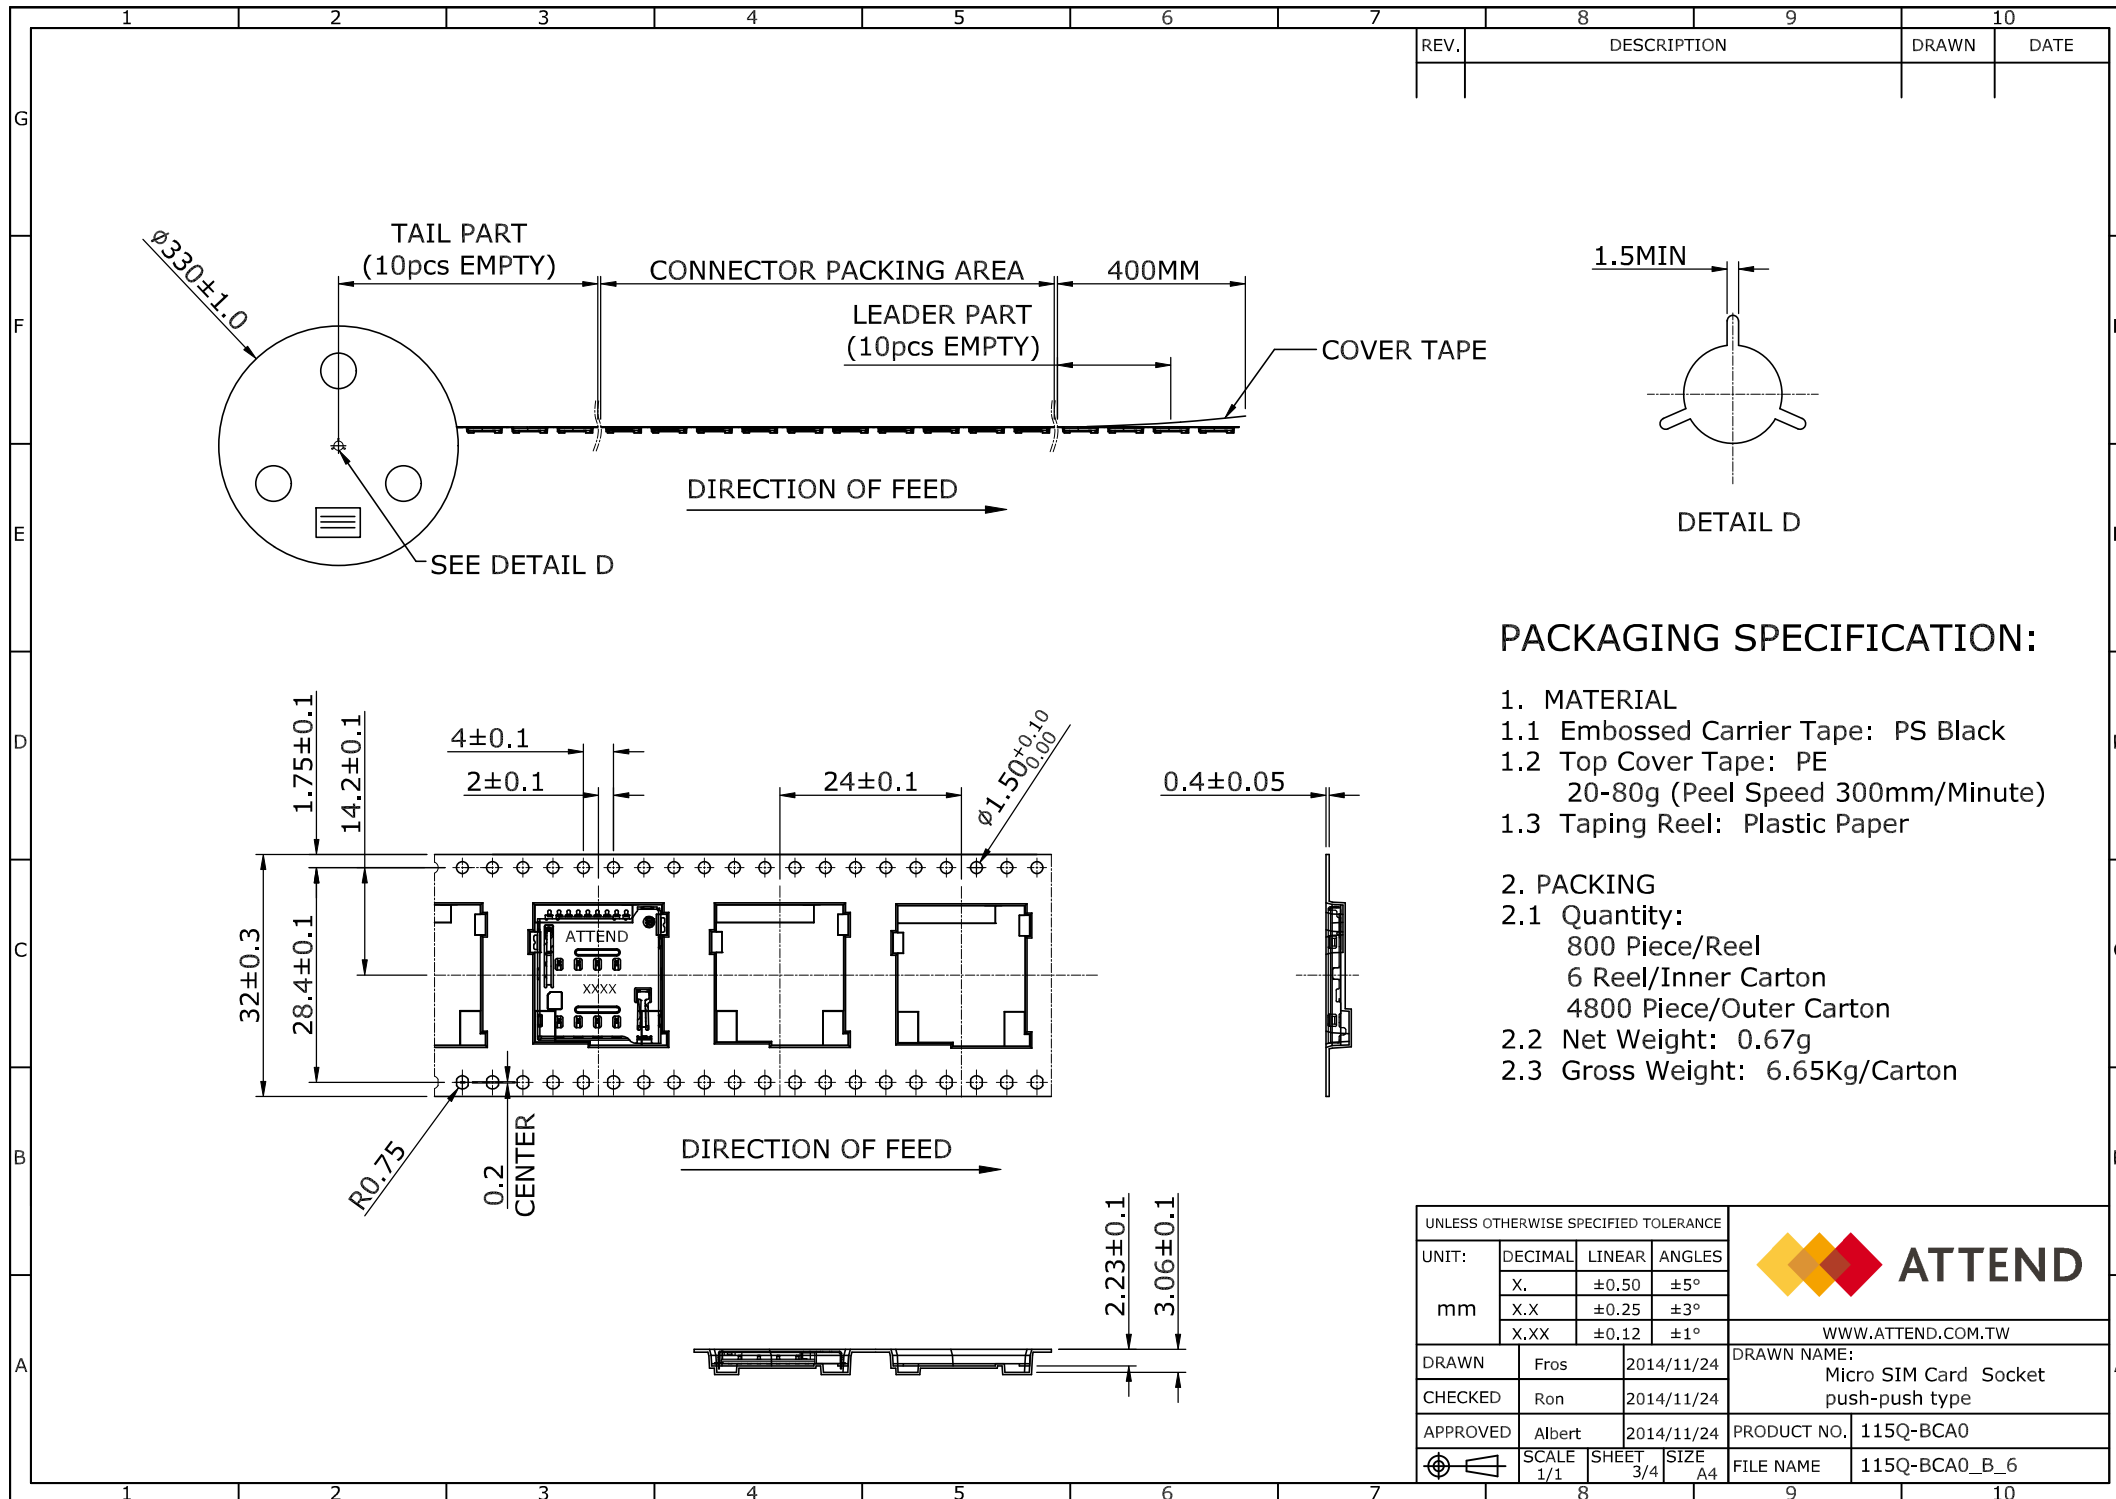

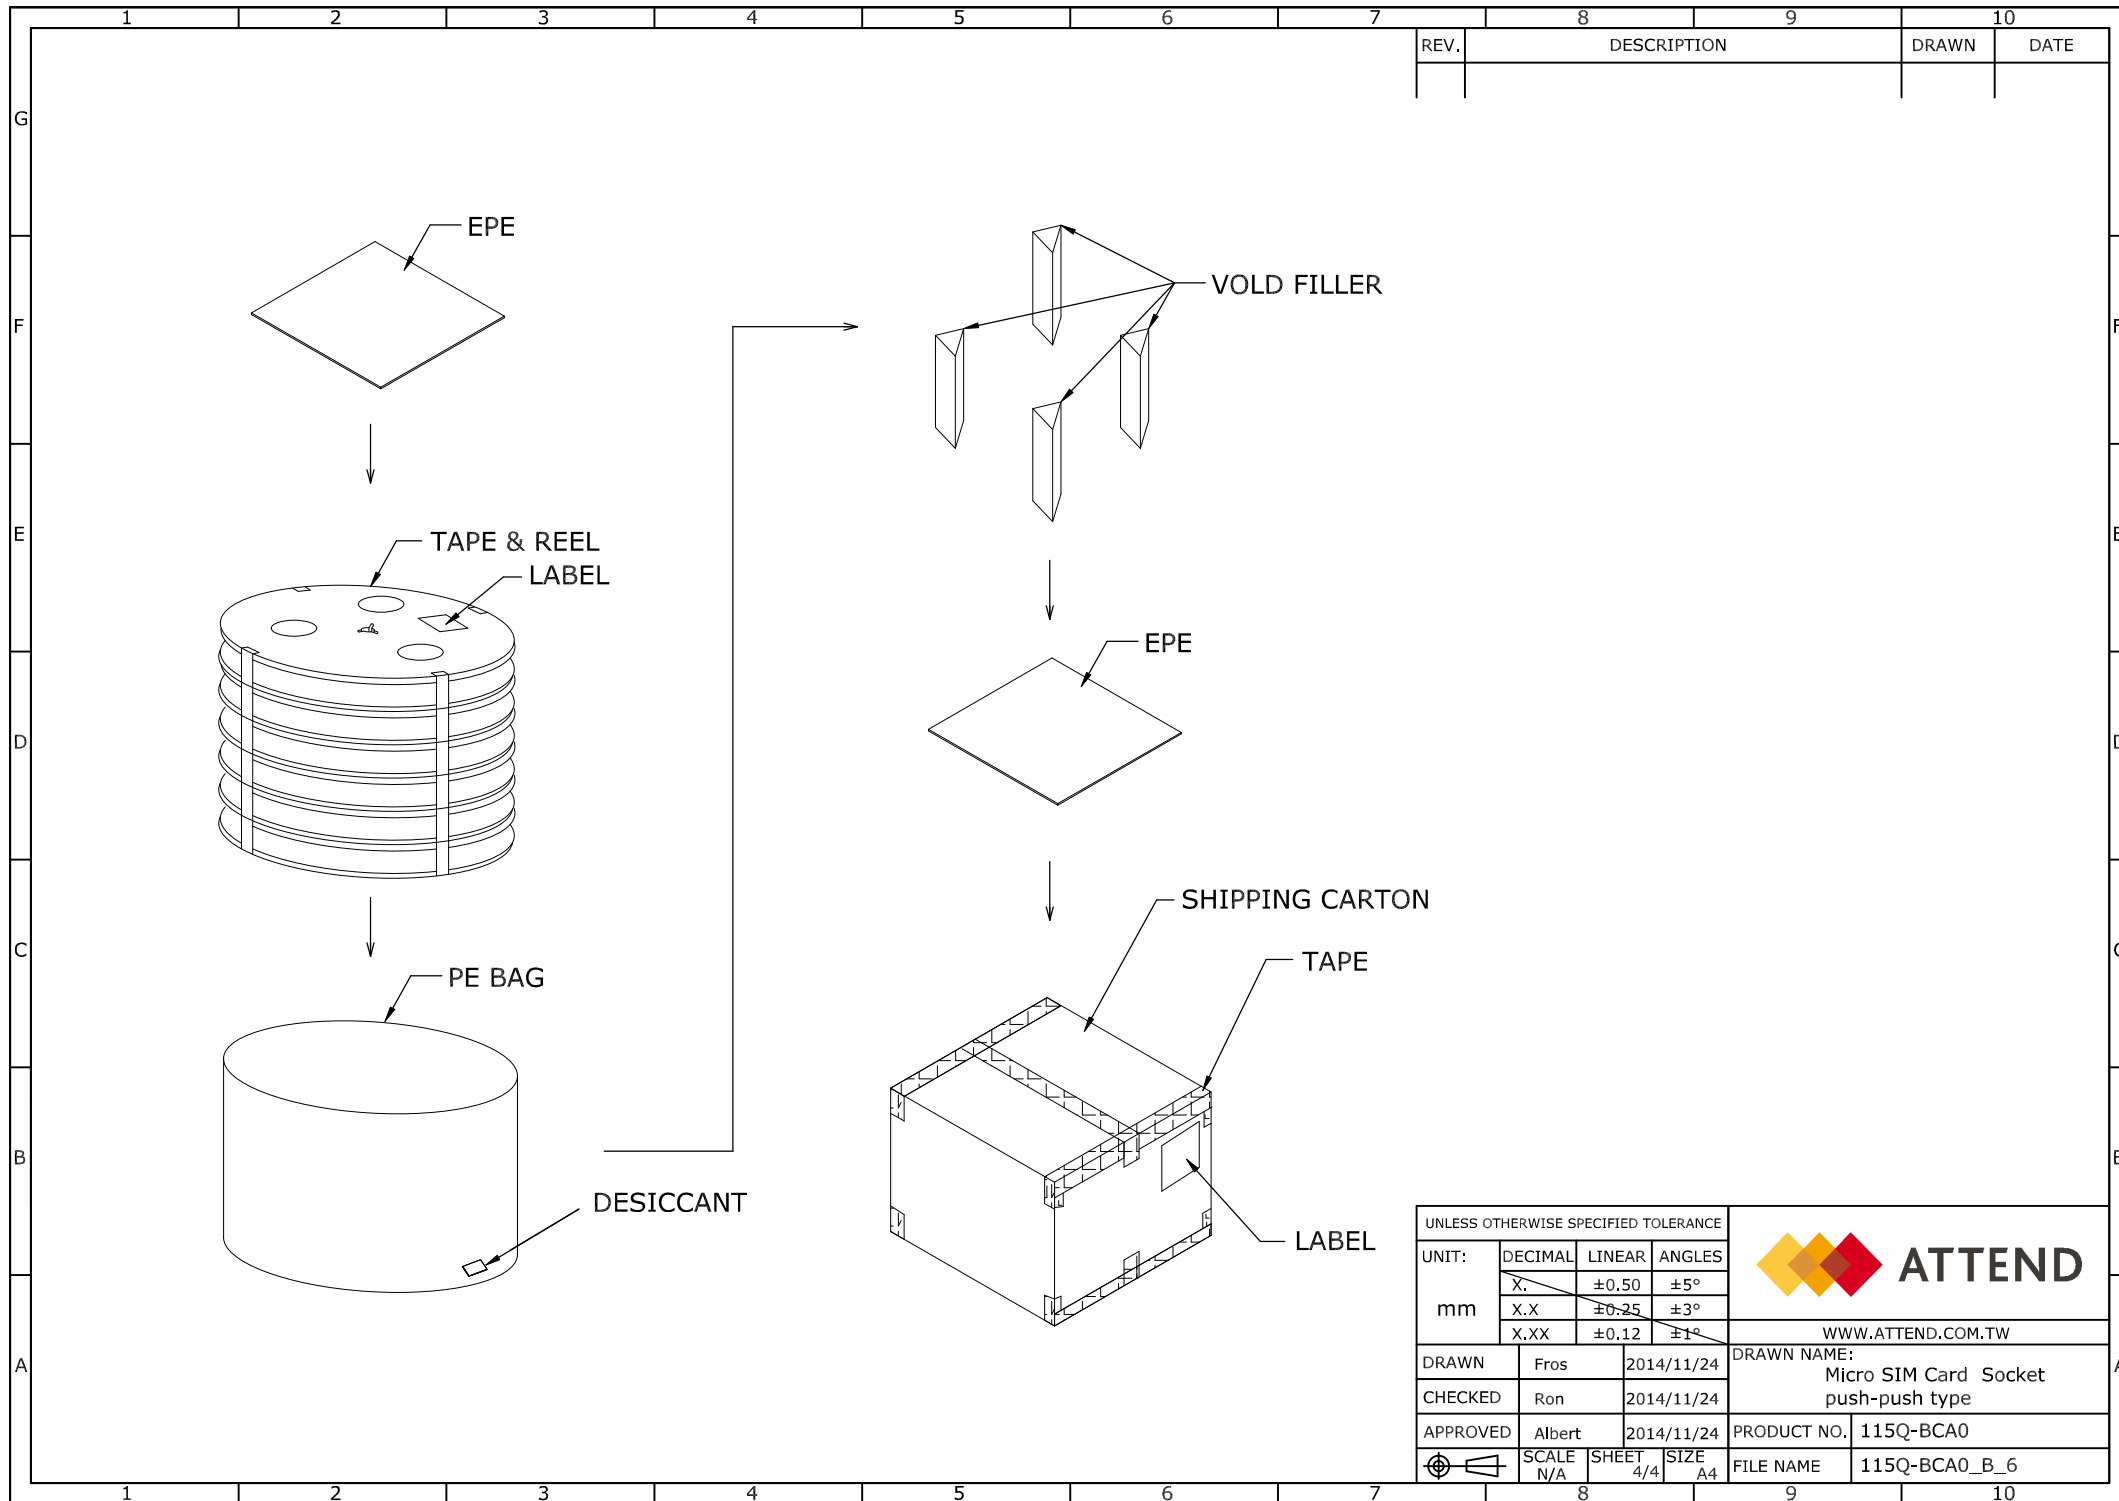

UNLESS OTHERWISE SPECIFIED TOLERANCE				 ATTEND	
UNIT: mm	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
				WWW.ATTEND.COM.TW	
DRAWN		Fros	2014/11/24	DRAWN NAME: Micro SIM Card Socket push-push type	
CHECKED		Ron	2014/11/24		
APPROVED		Albert	2014/11/24	PRODUCT NO.	115Q-BCA0
	SCALE N/A	SHEET 4/4	SIZE A4	FILE NAME	115Q-BCA0_B_6