
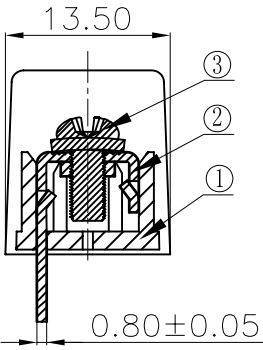
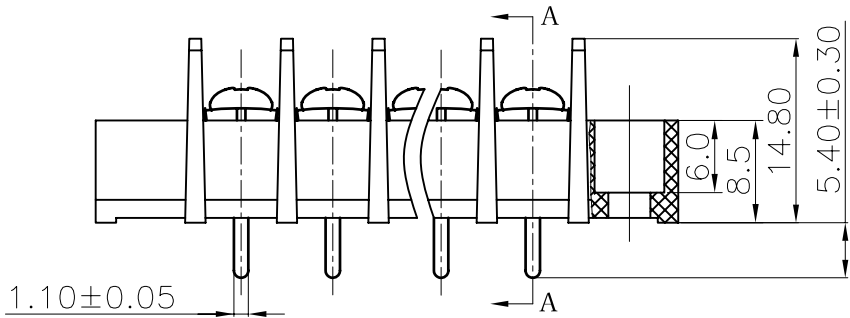



REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	CSX	07/20/06
△		增加UL刻字	YeJ	11/06/06

- NOTES:
- 1.Pitch:7.62mm
 - 2.Rated current:15A
 - 3.Rated voltage:300V
 - 4.Operation temperatures:-40° C~+105° C
 - 5.Insulation Withstand Voltage:AC2000V/1Min
 - 6.Insulation Resistance:500MΩ /DC500V
 - 7.Wire Range:22~14AWG
 - 8.Max.Torque:5.10kgf.cm
 - 9.Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm				
to 6	over 6 to 10	over 10 to 24	to 6	over 6 to 30	over 30 to 90	over 90 to 200
±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5
						±0.7

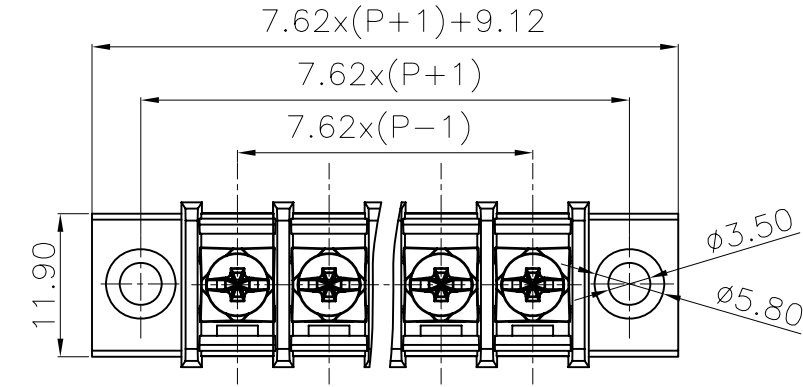

Section A-A

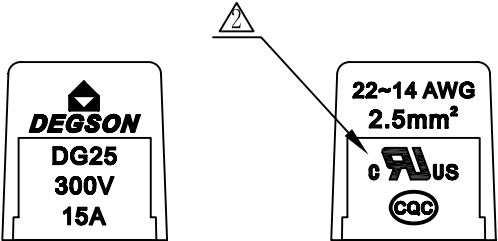

3	3*6 bright-Screw	S000000450 (H)	XX	Steel	Ni Plated
2	DG25S-Pin Header	5001B00090 (H)	XX	Brass	SnCe

1	DG25S Housing	5001M0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q"TY	MATERIAL	NOTES
DETACHED LISTS	MM (INCH)	DFTO Home	DATE 03/20/06*	DEGSON® 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE		
		MFO	DATE		
		APPVL	DATE		
	MM			NAME	
	.0 ±			DG25S-A-XXP-1Y-00A(H)	
	.00 ±				
	.000 ±				
	ANGLES ± 1°	G.E :		DRAWING NO. DG25S-E03	
	THIRD ANGLE PROJECTION	FINISH :		/PART NO.	
		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1 OF 1	