

FU-40

Reflective Fibre Unit




SPECIFICATIONS

Model		FU-40 ^{*1}
Beam emitting direction		Top
Aperture angle		Approx 8°
Fibre unit length		2 m free-cut
Fibre unit diameter		ø2.2×2
Minimum bend radius		R2 mm Tough-Flex
Environmental resistance	Ambient temperature	-40 to +50 °C
Weight		Approx. 23 g
^{*1} For details on the detecting distance, see the fibre amplifier catalogue.		

Dimensions

* Download CAD file or product manual for larger image/text and more detail.

FU-40

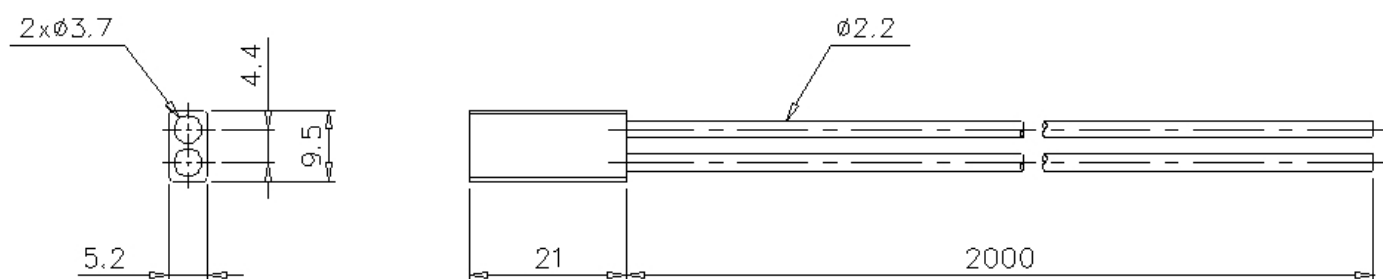

Mounting bracket

