


JGT300HF120G2VH

IGBT Module

Preliminary Data

Features:

- Field Stop Trench Gate IGBT
- Short Circuit Rated $>10\mu\text{s}$
- Low Saturation Voltage
- Low Switching Loss
- 100% RBSOA Tested($2\times I_c$)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

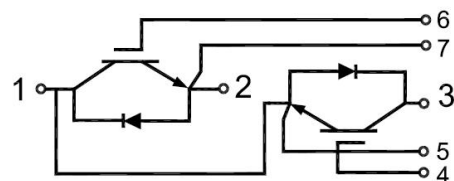

Applications:

- Welding
- HEV Inverter
- Industrial Motor Drives
- UPS

Maximum Rated Values of IGBT($T_c=25^\circ\text{C}$ unless otherwise specified)

V_{CES}	Collector-Emitter Blocking Voltage		1200	V
V_{GES}	Gate-Emitter Voltage		± 20	V
I_c	Continuous Collector Current	$T_c=100^\circ\text{C}$	300	A
		$T_c=25^\circ\text{C}$	580	A
I_{CM}	Repetitive Peak Collector Current	$T_J=175^\circ\text{C}$	600	A
t_{sc}	Short Circuit Withstand Time		>10	μs
P_D	Maximum Power Dissipation per leg	$T_c=25^\circ\text{C}$ $T_{Jmax}=175^\circ\text{C}$	1975	W

Electrical Characteristics of IGBT ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C = 4\text{mA}$, $V_{CE} = V_{GE}$	5.0	5.6	6.6	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 300\text{A}$, $V_{GE} = 15\text{V}$	$T_J=25^{\circ}\text{C}$	1.70	1.90	V
			$T_J=125^{\circ}\text{C}$	1.90		V
			$T_J=150^{\circ}\text{C}$	2.00		V
I_{CES}	Collector-Emitter Leakage Current	$V_{GE} = 0\text{V}$, $V_{CE} = V_{CES}$, $T_J = 25^{\circ}\text{C}$			1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE} = \pm 20\text{V}$, $V_{CE} = 0\text{V}$, $T_J = 25^{\circ}\text{C}$			400	nA
C_{ies}	Input Capacitance	$V_{CE} = 25\text{V}$, $V_{GE} = 0\text{V}$, $f = 1\text{MHz}$		25.2		nF
C_{res}	Reverse Transfer Capacitance			0.86		nF

Switching Characteristics

Switching Characteristics							
$t_{d(on)}$	Turn-on Delay Time	$V_{CC} = 600V, I_C = 300A, R_{Gon} = 2\Omega, V_{GE} = \pm 15V,$ Inductive Load	$T_J=25^{\circ}C$		0.39		μs
			$T_J=125^{\circ}C$		0.40		
			$T_J=150^{\circ}C$		0.40		
t_r	Rise Time		$T_J=25^{\circ}C$		0.13		μs
			$T_J=125^{\circ}C$		0.13		
			$T_J=150^{\circ}C$		0.13		
$t_{d(off)}$	Turn-off Delay Time		$T_J=25^{\circ}C$		0.39		μs
			$T_J=125^{\circ}C$		0.42		
			$T_J=150^{\circ}C$		0.42		
t_f	Fall Time	$T_J=25^{\circ}C$		0.13		μs	
		$T_J=125^{\circ}C$		0.19			
		$T_J=150^{\circ}C$		0.21			
E_{on}	Turn-on Switching Loss	$V_{CC} = 600V, I_C = 300A, R_{Gon} = 2\Omega, V_{GE} = \pm 15V,$ $di/dt=1880A/\mu s$ ($T_J=150^{\circ}C$) Inductive Load	$T_J=25^{\circ}C$		20.6		mJ
		$T_J=125^{\circ}C$		27.3			
		$T_J=150^{\circ}C$		29.7			

E_{off}	Turn-off Switching Loss	$V_{CC} = 600V, I_C = 300A, R_{Goff} = 2\Omega, V_{GE} = \pm 15V, du/dt = 3300V/\mu s (T_J = 150^\circ C)$ Inductive Load	$T_J = 25^\circ C$		26.7		mJ
			$T_J = 125^\circ C$		35.6		
			$T_J = 150^\circ C$		38.3		
Q_g	Total Gate Charge	$V_{GE} = +15V \dots -15V$	$T_J = 25^\circ C$		1.56		μC
$R_{g\ internal}$	Internal Gate Resistance		$T_J = 25^\circ C$		2.5		Ω
RBSOA	$I_C = 600A, V_{CC} = 1050V, V_p = 1200V, R_{Goff} = 2\Omega, V_{GE} = +15V \text{ to } 0V, T_J = 150^\circ C$			Trapezoid			
I_{SC}	SC Data	$V_{CC} = 600V, V_{GE} = \pm 15V, R_{Gon} = 2\Omega, R_{Goff} = 2\Omega, t_p = 10\mu s, T_J = 125^\circ C$, Inductive Load			1594		A
$R_{\theta JC}$	IGBT Thermal Resistance: Junction-to-Case(per leg)					0.076	$^\circ C/W$

Maximum Rated Values of Diode ($T_C = 25^\circ C$ unless otherwise specified)

V_{RRM}	Repetitive Peak Reverse Voltage	1200	V
I_F	Diode Continuous Forward Current	300	A
I_{FM}	Diode Maximum Forward Current	600	A

Electrical Characteristics of Diode ($T_C = 25^\circ C$ unless otherwise specified)

Symbol	Description	Conditions		Min.	Typ.	Max	Units
V _{FM}	Forward Voltage	I _F =300A	T _J =25℃		1.80		V
			T _J =125℃		1.80		
			T _J =150℃		1.80		
t _{rr}	Reverse Recovery Time	I _F = 300A, -di _F /dt =2010A/μs(T _J =150℃), V _R = 600V, V _{GE} = -15V	T _J =25℃		0.41		μs
			T _J =125℃		0.60		
			T _J =150℃		0.64		
I _{rr}	Peak Reverse Recovery Current		T _J =25℃		150		A
			T _J =125℃		181		
			T _J =150℃		191		
Q _{rr}	Reverse Recovery Charge		T _J =25℃		29.7		μC
			T _J =125℃		50.7		
			T _J =150℃		57.8		

E _{rec}	Reverse Recovery Energy	I _F =300A, -diF/dt=2010/μs(T _J =150 °C),V _R = 600V, V _{GE} = -15V	T _J =25°C		12.9		mJ
			T _J =125°C		22.0		
			T _J =150°C		25.4		
R _{θJC}	Diode Thermal Resistance: Junction-to-Case (per leg)					0.134	°C /W

Module

Symbol	Description		Min.	Typ.	Max.	Units
V_{ISO}	Isolation Voltage (All Terminals Shorted)	$f = 50Hz, 1minute$	2500			V
T_J	Maximum Junction Temperature				175	$^\circ C$
T_{JOP}	Maximum Operating Junction Temperature Range		-40		+150	$^\circ C$
T_{stg}	Storage Temperature		-40		+125	$^\circ C$
CTI	Comparative Tracking Index		200			
$R_{\theta CS}$	Case-to-Sink Thermally (Conductive Grease Applied)				0.03	$^\circ C / W$
T	Power Terminals Screw:M6		3.0		5.0	N·m
T	Mounting Screw:M6		4.0		6.0	N·m
G	Weight			290		g

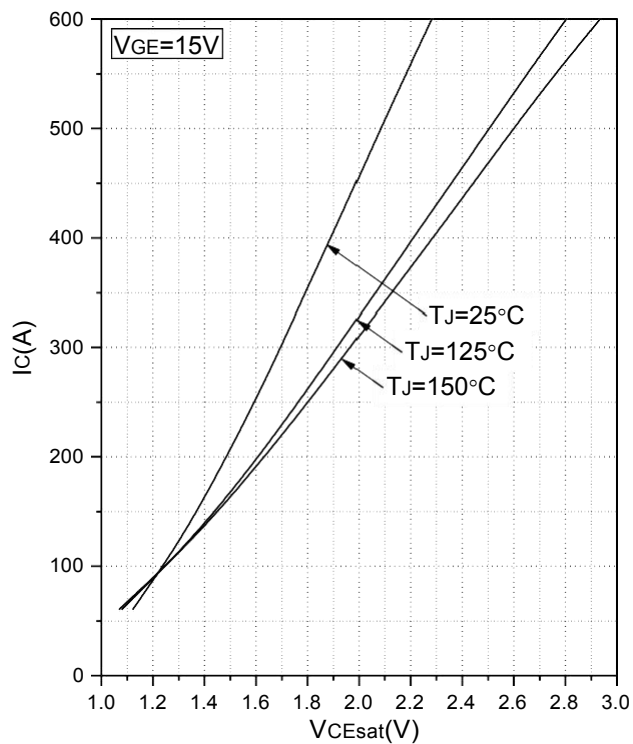


Fig.1 Typical Saturation Voltage Characteristics

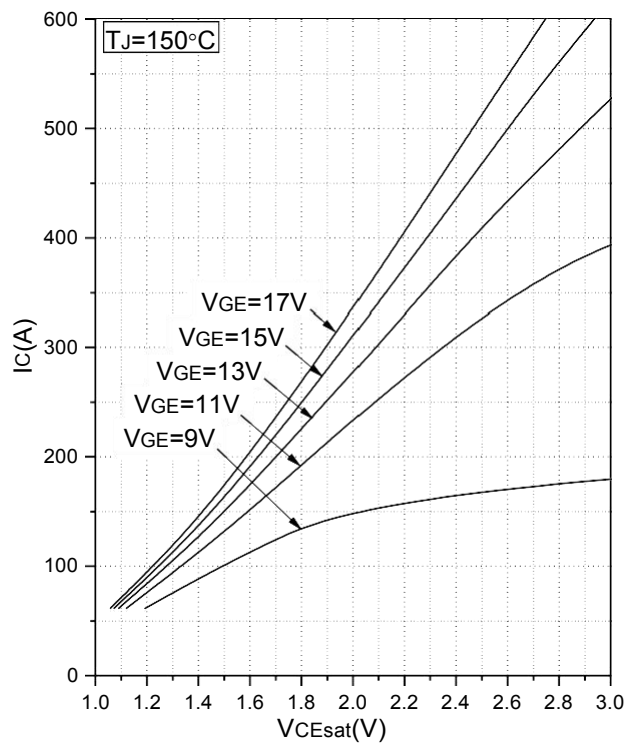


Fig.2 Typical Output Characteristics

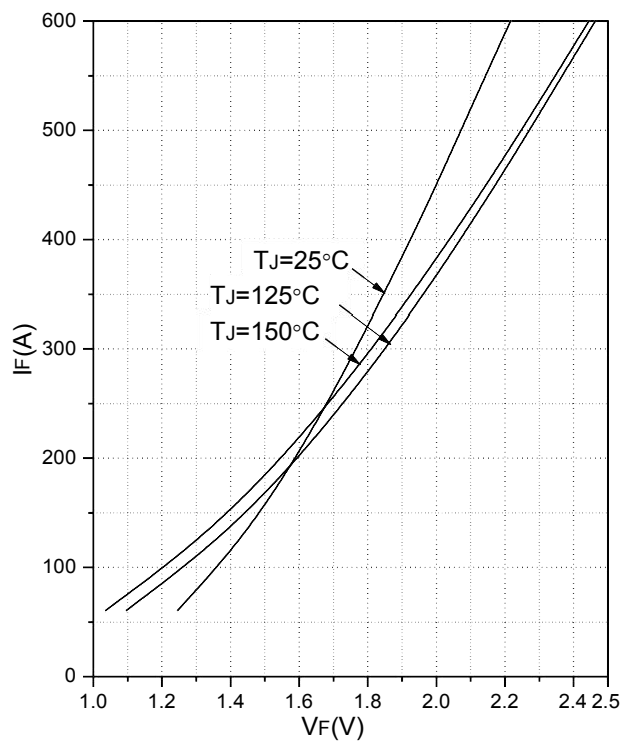


Fig.3 Forward Characteristics of Diode

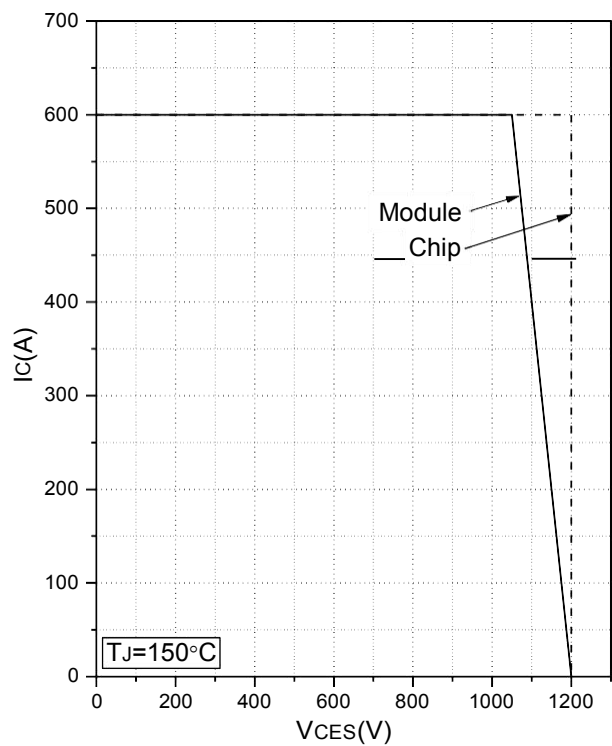


Fig.4 Reverse Bias Safe Operation Area (RBSOA)

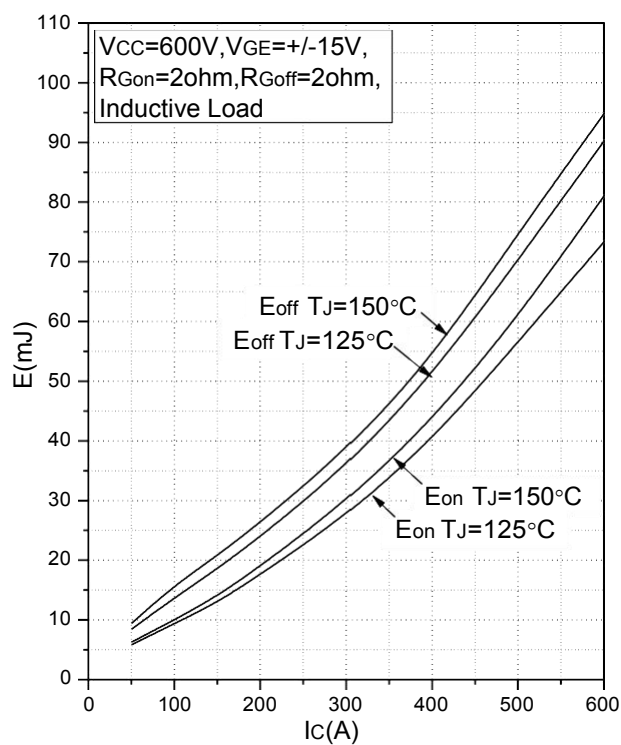


Fig.5 Typical Switching Loss vs. Collector Current

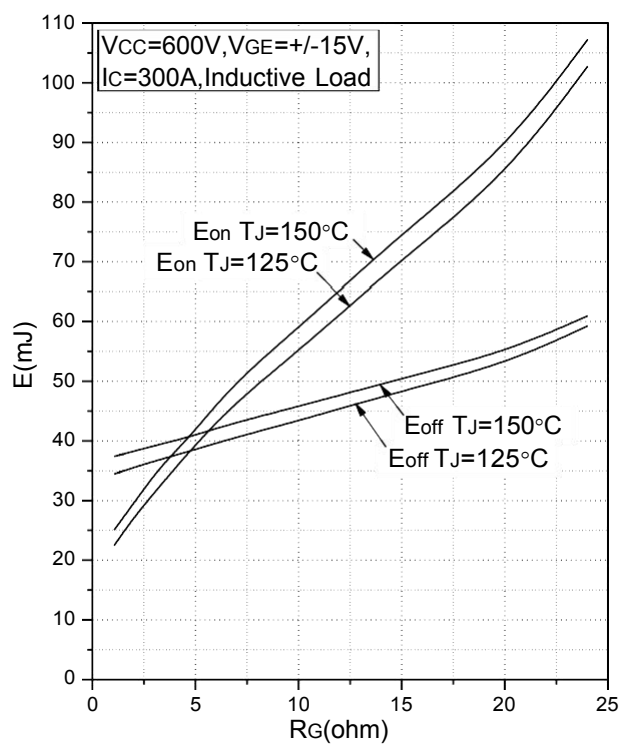


Fig.6 Typical Switching Loss vs. Gate Resistance

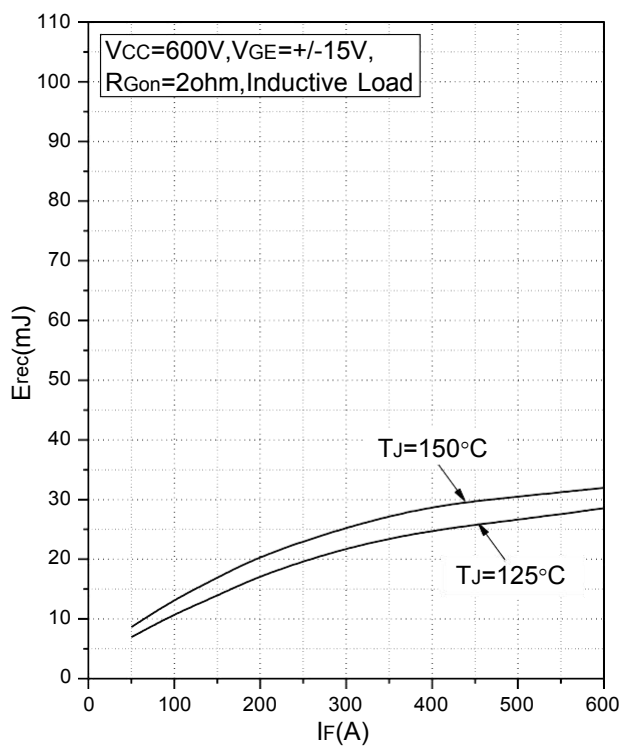


Fig.7 Typical Switching Loss vs. Forward Current

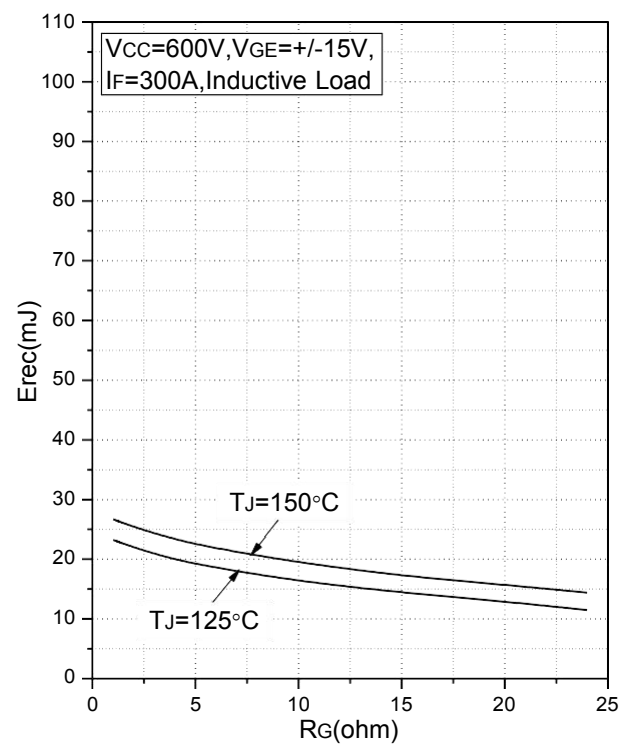


Fig.8 Typical Switching Loss vs. Gate Resistance

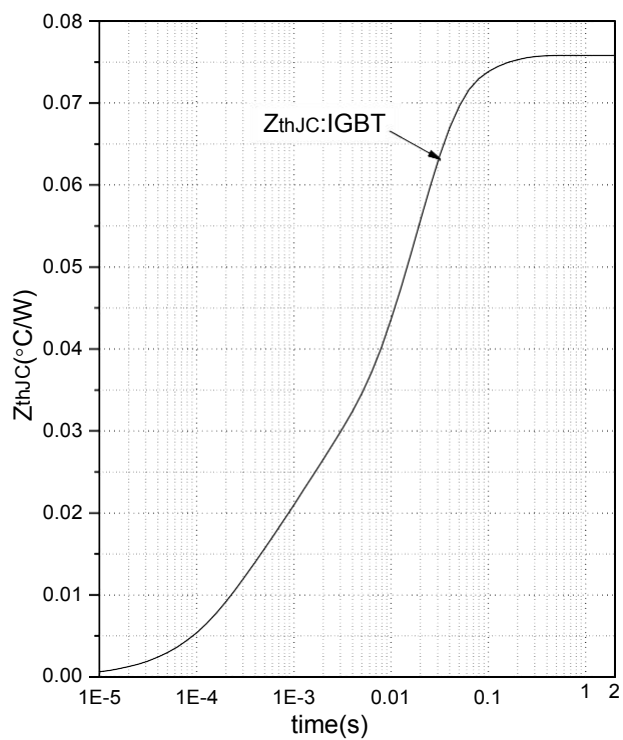


Fig.9 Transient Thermal Impedance (IGBT)



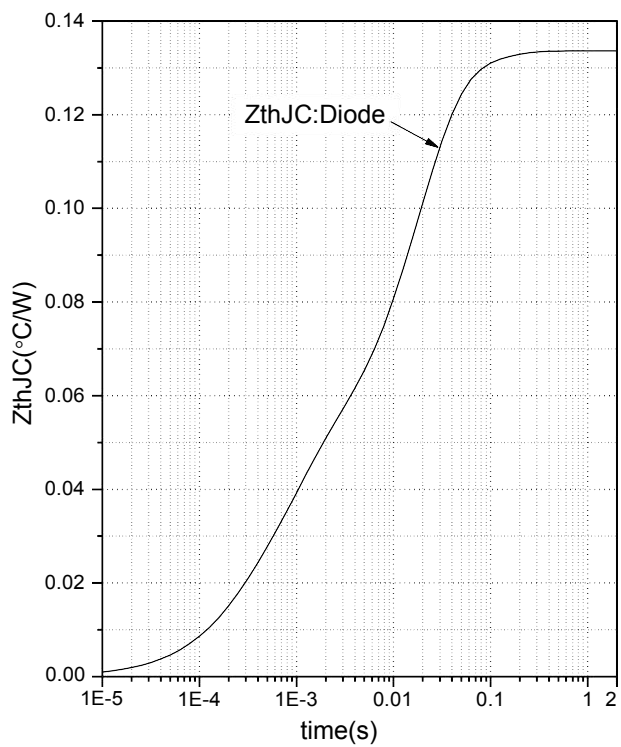


Fig.10 Transient Thermal Impedance (Diode)



Internal Circuit

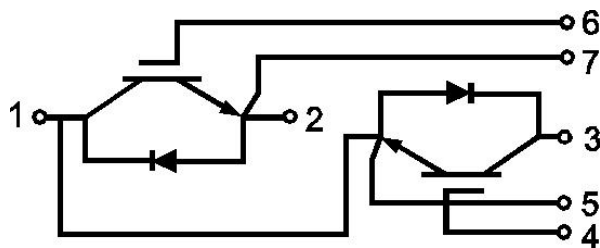

Package Outline (Unit: mm):

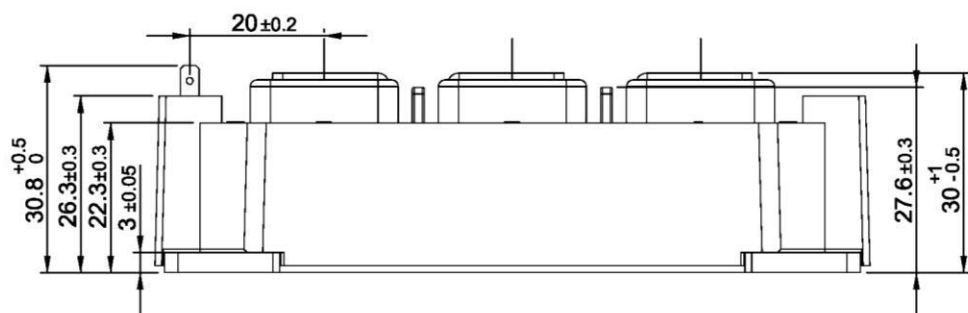

View A
scale 3:1

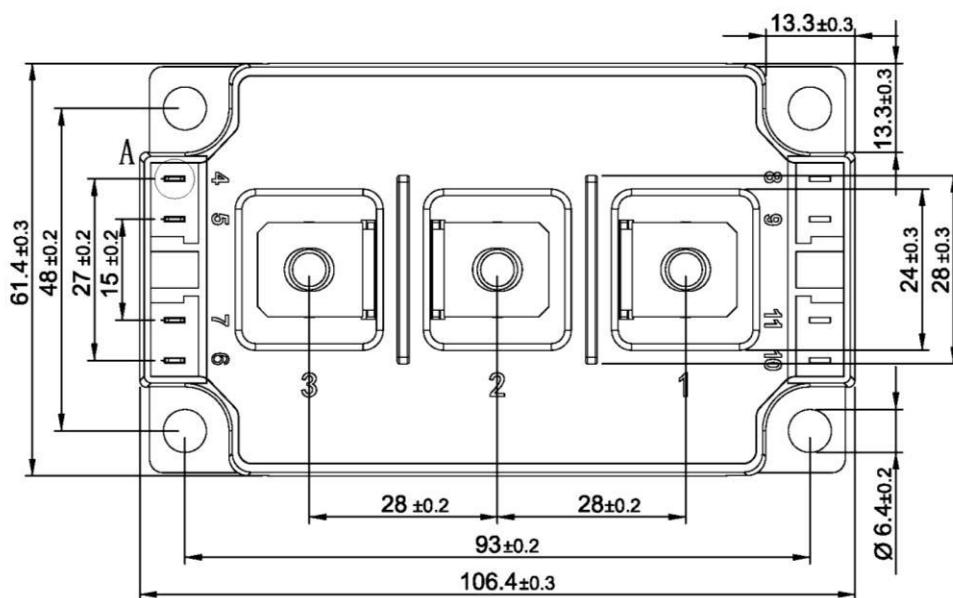

Date	Revision	Notes
04/18/2022	01	Initial Release