

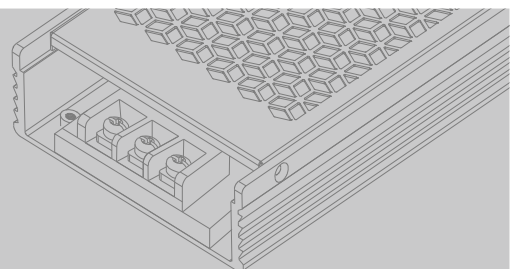



DIN RAIL POWER SUPPLIES

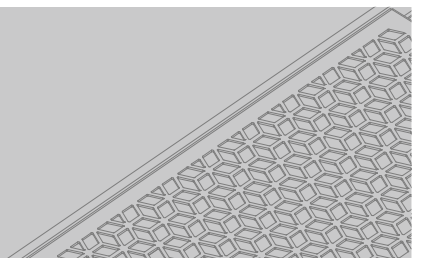



*ELCOMTECH - бренд
премиального качества! Продукция
изготавливается с
применением уникальных технологий
и новейших материалов.
Главная цель компании сделать Hi-Rel
продукцию доступной для
общепромышленного применения.
Гарантия на продукцию до 10 лет.*



ADHDR-30

DIN RAIL POWER SUPPLIES



Universal AC input range
Class II isolation
Class 2/ Pass LPS
Over voltage category III
DC output voltage adjustable
Installed on DIN rail TS-35/7.5 or 15
100% full load burn-in test
3 years warranty

Dimensions:(mm)



Safety Standard:

UL 62368-1
IEC 62368-1
BS EN/EN 62368-1

EMC Standard:

EN 55032
EN 61000-3-2,-3
EN 61000-4-2,3,4,5,6,8,11



Electrical Characteristics

Model No.	ADHDR-30-5	ADHDR-30-12	ADHDR-30-15	ADHDR-36-24	ADHDR-30-48
DC Voltage	5V	12V	15V	24V	48V
Rated Current	3A	2A	2A	1.5A	0.63A
Rated Power(Max)	15W	24W	30W	36W	30W
Ripple & Noise(Max)	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p
Input Voltage	90 ~ 264VAC 127 ~ 370VDC				
Inrush Current	25A/115VAC 45A/230VAC				
Efficiency	82%	88%	89%	89%	90%
Working Temperature	-30 ~ +70 °C (Refer to "Derating Curve")				
Withstand Voltage	I/P-O/P:3KVAC				
Protection	Short Circuit/Over Load/Over Voltage				
Connection	I/P: 2 poles terminal Block, O/P: 2 poles terminal Block				