

MOTOR SUPPRESSOR

RC, 3x575VAC/7,5kW


3× 575 V AC

RC


Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration

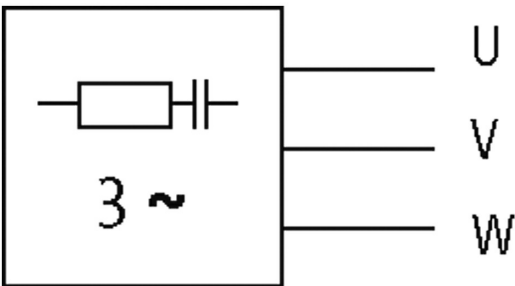

RC

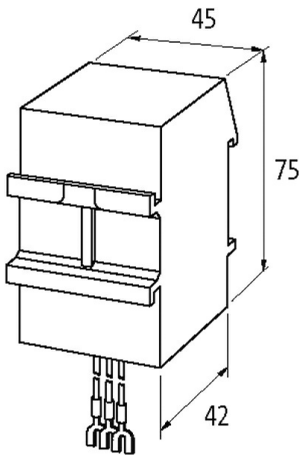

Product may differ from Image



Technical Data	
Frequency	50...60 Hz
Input voltage	575...575 V AC
Material	Flame retardant plastic acc. to (UL 94)
Potting compound	2-component epoxy
General data	
Temperature range	-20...+60 °C

Connection	approx. 250 mm, single cores 0.5 mm <sup>2</sup> , with self-securing fork terminal ends M4
Dimensions H×W×D	75×45×42 mm

**Commercial data**

country of origin	CZ
customs tariff number	85363010
EAN	4048879019613
eClass	27371013
Packaging unit	1.000