



SUPER FAST RECOVERY RECTIFIER

SF21 THRU SF28	VOLTAGE RANGE CURRENT	50 to 600 Volts 2.0Ampere
----------------	--------------------------	------------------------------


DO-15

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375"(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.014ounce, 0.39grams

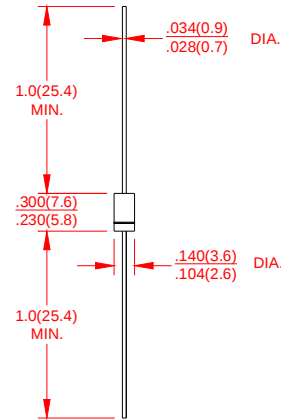

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	SF 21	SF 22	SF 23	SF 24	SF 25	SF 26	SF 27	SF 28	UNITS	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	500	600	Volts	
Maximum RMS Voltage	V _{RMS}	35	70	105	140	210	280	350	420	Volts	
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	500	600	Volts	
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 55℃	I _(AV)	2.0								Amp	
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	I _{FSM}	50								Amps	
Maximum Instantaneous Forward Voltage @ 2.0A		V _F	0.95			1.25		1.7		Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25℃	I _R	5.0								μA
	T _A = 125℃		50								
Maximum Reverse Recovery Time Test conditions IF=0.5A,IR=1.0A,IRR=0.25A		t _{rr}	35								ns
Typical Thermal Capavitance (Measured at 1.0MHz and applied rever voltage of 4.0V)		C _J	30			20					PF
Typical Thermal Resistance(NOTE 1)		R _{θJA}	40								℃/W
Operating Junction Temperature Range		T _J	(-55 to +150)								℃
Storage Temperature Range		T _{STG}	(-55 to +150)								℃

Notes:

1. Thermal resistance from junction to ambient with .375"(9.5mm)lead length, P.C.B. mounted. .



SUPER FAST RECOVERY RECTIFIER

SF21 THRU SF28

VOLTAGE RANGE
CURRENT

50 to 600 Volts
2.0Ampere

RATING AND CHARACTERISTIC CURVES SF21 THRU SF28

FIG.1-TYPICAL FORWARD CURRENT
DERATING CURVE

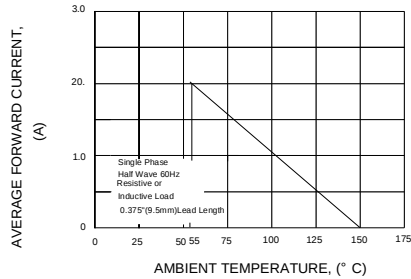


FIG.2-MAXIMUM NON-REPETITIVE PEAK
FORWARD SURGE CURRENT

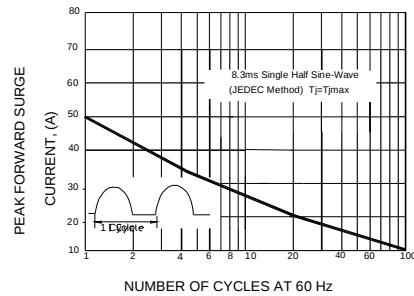


FIG.3-TYPICAL INSTANTANEOUS
FORWARD CHARACTERISTICS

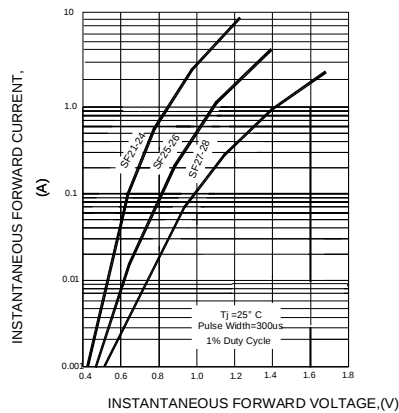


FIG.4-TYPICAL REVERSE
CHARACTERISTICS

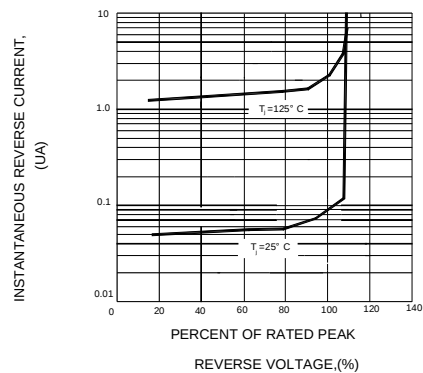


FIG.5-TYPICAL JUNCTION CAPACITANCE

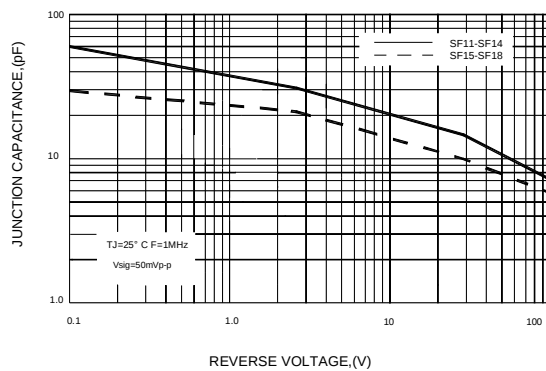


FIG.6-TEST CIRCUIT DIAGRAM AND
REVERSE RECOVERY TIME CHARACTERISTIC

