


**DIN RAIL  
POWER SUPPLIES**




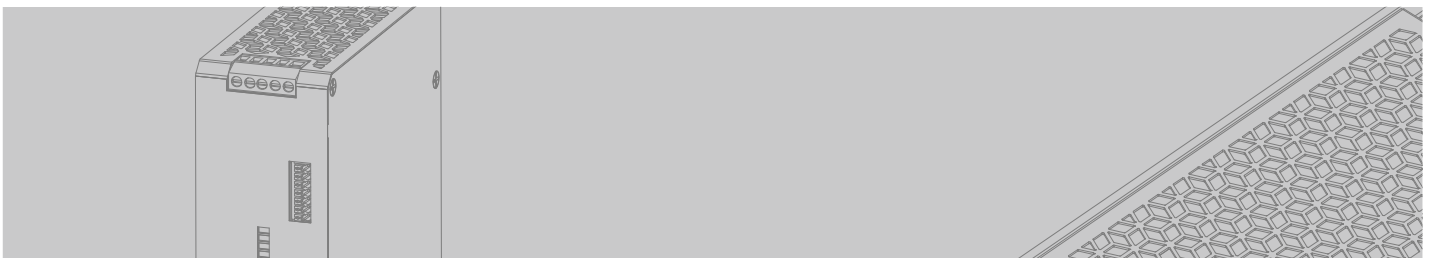

*ELCOMTECH - бренд  
премиального качества! Продукция  
изготавливается с  
применением уникальных технологий  
и новейших материалов.  
Главная цель компании сделать Hi-Rel  
продукцию доступной для  
общепромышленного применения.  
Гарантия на продукцию до 10 лет.*

**ADHDR-60**


Universal AC input range  
 Class II isolation  
 Class 2/ Pass LPS  
 Over voltage category III  
 DC output voltage adjustable  
 Installed on DIN rail TS-35/7.5 or 15  
 100% full load burn-in test  
 3 years warranty

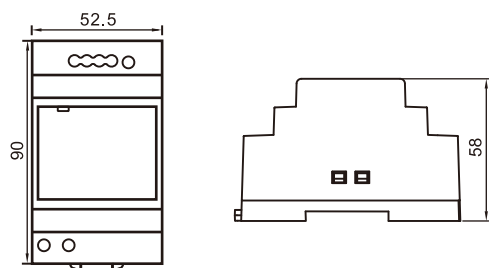**Dimensions:(mm)**

**Safety Standard:**

UL 62368-1  
 IEC 62368-1  
 BS EN/EN 62368-1

**EMC Standard:**

EN 55032  
 EN 61000-3-2,-3  
 EN 61000-4-2,3,4,5,6,8,11


**Electrical Characteristics**

Model No.	ADHDR-60-5	ADHDR-60-12	ADHDR-60-15	ADHDR-60-24	ADHDR-60-48
DC Voltage	5V	12V	15V	24V	48V
Rated Current	4.5A	4.5A	4A	2.5A	1.25A
Rated Power(Max)	22,5W	54W	60W	60W	60W
Ripple & Noise(Max)	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p
Input Voltage	90 ~ 264VAC    127 ~ 370VDC				
Inrush Current	30A/115VAC    60A/230VAC				
Efficiency	85%	88%	89%	90%	91%
Working Temperature	-30 ~ +70 °C (Refer to "Derating Curve")				
Withstand Voltage	I/P-O/P:3KVAC				
Protection	Short Circuit/Over Load/Over Voltage				
Connection	I/P: 2 poles terminal Block, O/P: 4 poles terminal Block				