


Category: 螺钉接线/Plug-in terminal-plug

Product name: TU2.5-2-GY

Product Description: 5.2mm , 1000V , 24A CE,UL



Product Picture

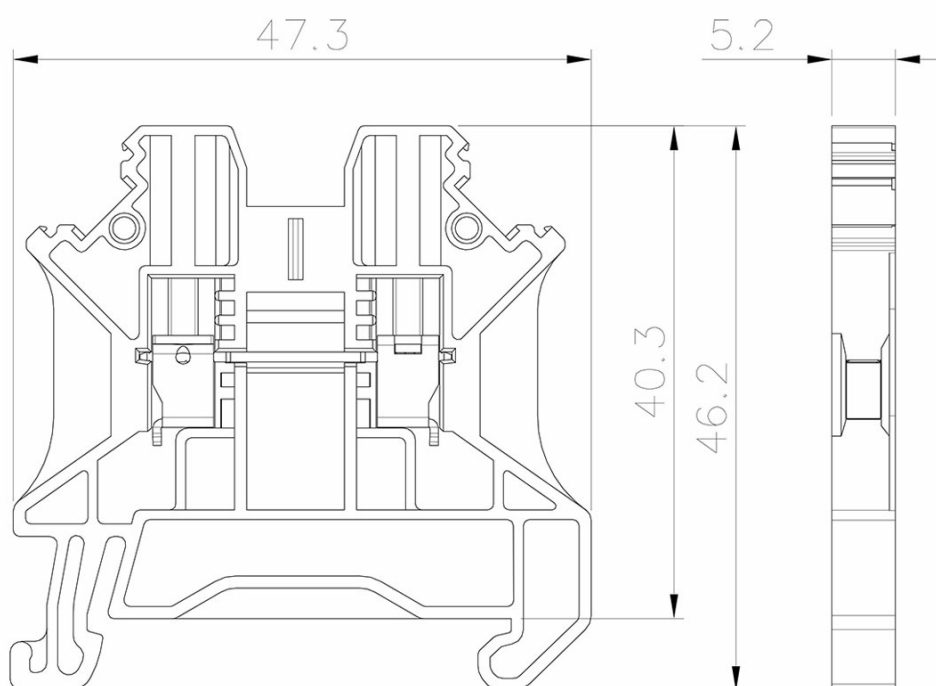

基本信息 /Basic Information

产品型号 SUPU ID	TU2.5-2-GY
宽度 Width	5.2mm
产品层数 Number of levels	1
接线位数 Number of connections	2
接线方式 Connection method	螺钉接线 Screw connection
防护等级 Protection Level	IP20

工作温度	-40~+105℃
Work temperature	

IEC数据 /IEC Data

额定电流	24A
Rated Current	
额定电压	1000V
Rated Voltage	
过压类别	III
Overvoltage category	
污染等级	3
Pollution degree	
额定冲击电压	8.0KV
Rated impulse voltage	
刚性导线截面积	0.2-4mm ²
Conductor cross section solid	
柔性导线截面积	0.2-2.5mm ²
Conductor cross section flexible	
柔性导线截面积，带绝缘管套	0.2-2.5mm ²
Conductor cross section flexible,with furrule	
锁线螺钉规格	M2.5
Locking screw Specification	
额定扭矩	0.4N.m
Rated Torque	
固定螺钉规格	-
Fixed Screw Specification	
额定扭矩	-
Rated Torque	
剥线长度	9-11mm
Stripping length	

UL数据 /UL Data

使用组别	B	C	D
Use group			
额定电流	20A	20A	-
Rated Current			
额定电压	600V	600V	-
Rated Voltage			
额定接线容量	26-12AWG		
Rated cross section			

材料信息 /Material Data

绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	I
阻燃等级，符合UL94 Flame retardant grade, UL94 compliance	V0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn,Plated

产品认证 /Product Certification

认证图标 Certificate	
UL证书号 UL file No.	
VDE证书号 VDE No.	
TUV证书号 TUV No.	

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code