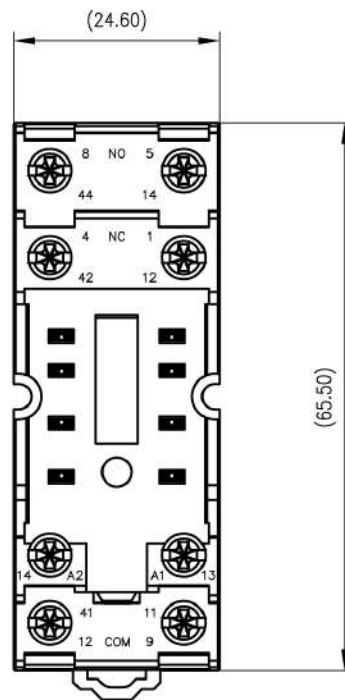
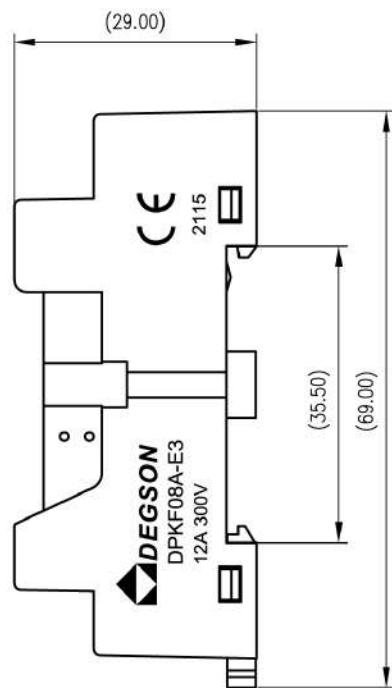


尺寸公差(mm)					
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150	0.05/10 ±T
±0.20	±0.30	±0.50	±0.70	±1.00	


Rated current	12A
Rated voltage	300V
Coil/Contact dielectric voltage	2500V/S
Dielectric voltage between contact	2500V/S
Screw torque	1.0Nm
External connection wire	20-14/0.5-2.5W G/mm ²
Ambient temperature	-40~+85℃
Key controlled symbol	*

Conform to RoHS

Printing for laser marking,printing content is clear ,no broken line,ect

Seal literal reference according to the foot position in the drawing



1	DPKF08A-E3-00A(H)-N		30019000030		1		
NO.	DESCRIPTION		MATERIAL NO.		QTY	MATERIAL	NOTES
MATERIAL: /			SURFACE: /				
MAT.NO.: 30020000049			 DEGSON® 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD DPKF08A-E3-00A(H)				
STATUS: /							
APPD:							
CHKD:							
DRFT: /							
Description:			DRAWING NO.: 30000357				
					REV	T0-1	
 SIZE: A4					TYPE: PRODUCT DRAWING		SCALE: 1:1
					SHEET	1/1	

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------