


**DIN RAIL
POWER SUPPLIES**



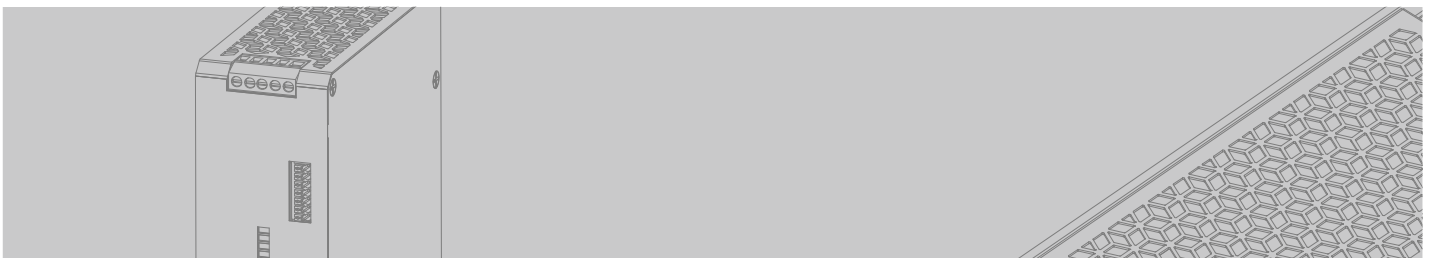

*ELCOMTECH - бренд
премиального качества! Продукция
изготавливается с
применением уникальных технологий
и новейших материалов.
Главная цель компании сделать Hi-Rel
продукцию доступной для
общепромышленного применения.
Гарантия на продукцию до 10 лет.*


ADTDR-240

DIN RAIL POWER SUPPLIES



3-Phase 340~550VAC wide range input
Built-in passive PFC function
Bult-in constant current limiting circuit
Bult-in DC OK relay contact
3 years warranty

Dimensions:(mm)

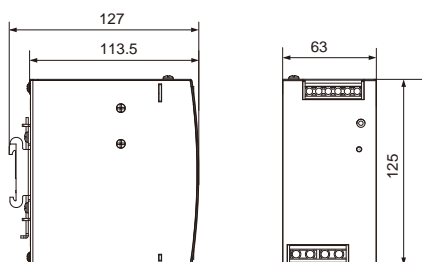

Safety Standard:

UL 61010
IEC 61010-1
BS EN/EN 61010-1

EMC Standard:

EN 55032
EN 61000-3-11,-12
EN 61000-4-2,3,4,5,6,8,11



Electrical Characteristics

Model No.	ADTDR-240-24	ADTDR-240-48
DC Voltage	24V	48V
Rated Current	10A	5A
Rated Power(Max)	240W	240W
Ripple & Noise(Max)	100mVp-p	120mVp-p
Input Voltage	Three-Phase 340 ~ 550VAC (Dual phase operation possible in connecting L1,L3,FG or L2,L3,FG) or 480 ~ 780VDC	
Inrush Current	COLD START 50A	
Efficiency	92%	
Working Temperature	-30 ~ +70 C (Refer to "Derating Curve")	
Withstand Voltage	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC	
Protection	Short Circuit/Over Load/Over Voltage/Over Temperature	
Connection	I/P :4 poles terminal Block O/P: 6 poles terminal Block	