


Iron Powder Cores

Toroidal Cores

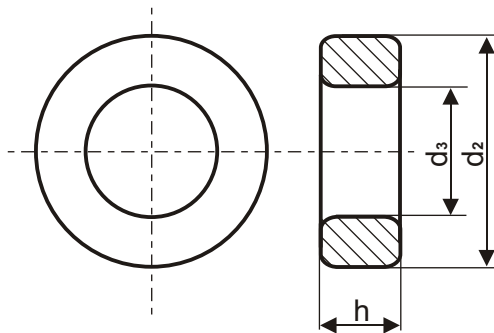

- 2 Red/Clear
- 3 Gray/Clear
- 6 Yellow/Clear
- 8 Yellow/Red
- 10 Black/Clear
- 15 White/Red
- 18 Green/Red
- 26 Yellow/White
- 28 Gray/Green
- 33 Gray/Yellow
- 38 Gray/Black
- 40 Green/Yellow
- 52 Green/Blue

AET Part No.	AL nH/N ²	Dimensions			Effective parameters		
		d_2 [mm]	d_3 [mm]	h [mm]	l_e [cm]	A_e [cm ²]	V_e [cm ³]
DT225-2B	21,5	57,2	35,6	25,4	14,6	2,590	37,80
DT225-26B	160,0						
DT225-52B	155,0						
DT250-18	177,0	63,5	31,8	25,4	15,0	3,840	57,40
DT250-26	242,0						
DT250-40	194,0						
DT250-52	242,0						
DT300-2	11,4	77,2	49,0	12,7	19,8	1,680	33,40
DT300-8/90	37,0						
DT300-18	58,0						
DT300-26	80,0						
DT300-33	34,5						
DT300-40	71,0						
DT300-52	80,0						
DT300-2D	22,8	77,20	49,0	25,4	19,8	3,780	67,00
DT300-26D	160,0						
DT300-33D	69,0						
DT300-40D	142,0						
DT300-52D	160,0						
DT400-2	18,0	102,0	57,2	16,5	25,0	3,460	86,40
DT400-8/90	60,0						
DT400-18	96,0						
DT400-26	131,0						
DT400-28	40,5						
DT400-33	55,0						
DT400-40	115,0						
DT400-52	131,0						
DT400-26B	205,0	102,0	57,2	25,4	25,0	5,360	133,00
DT400-2D	36,0	102,0	57,2	33,0	25,0	6,850	171,00
DT400-26D	262,0						
DT400-28D	81,0						
DT400-33D	110,0						
DT400-40D	230,0						
DT400-52D	262,0						

AL measurement made under conditions: 1,0mT/10kHz