

This surface is Yellow.

This surface is Blue.




This surface is Yellow.

This surface is Green.


This surface is Green.

未注公差/General tolerances (mm)

0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500 ~ 1000	0.1/10 ±2'
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

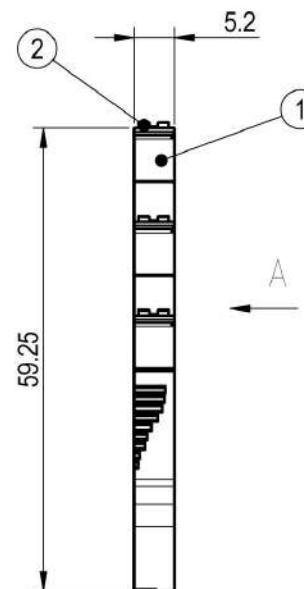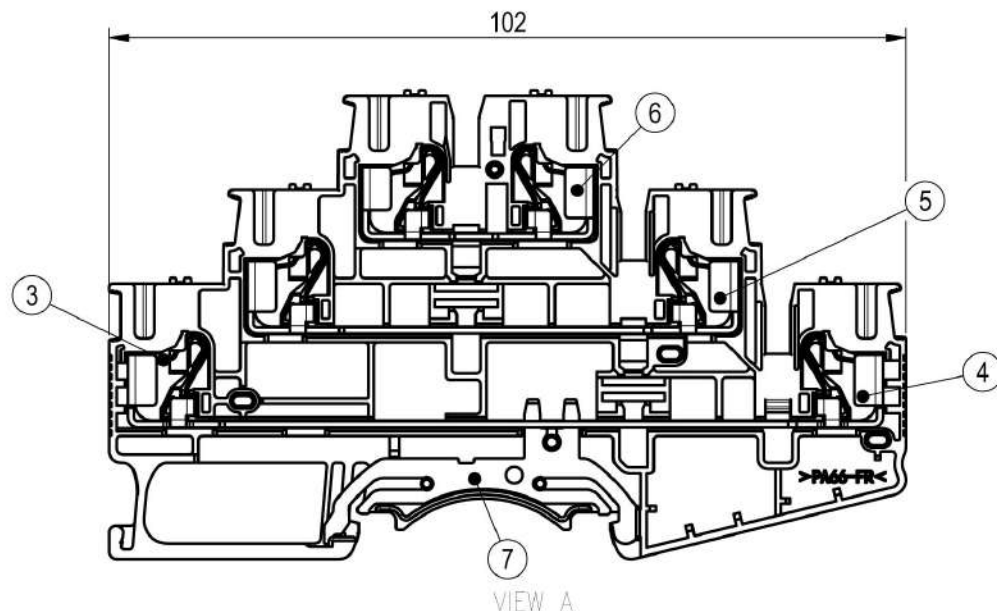

7	Grounding	Copper alloy	Sn Plated
6	Current carrier 3	Copper	Sn Plated
5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94 V-0
1	Housing	PA66	UL94 V-0
ITEM	NAME OF PART	MATERIAL	NOTES

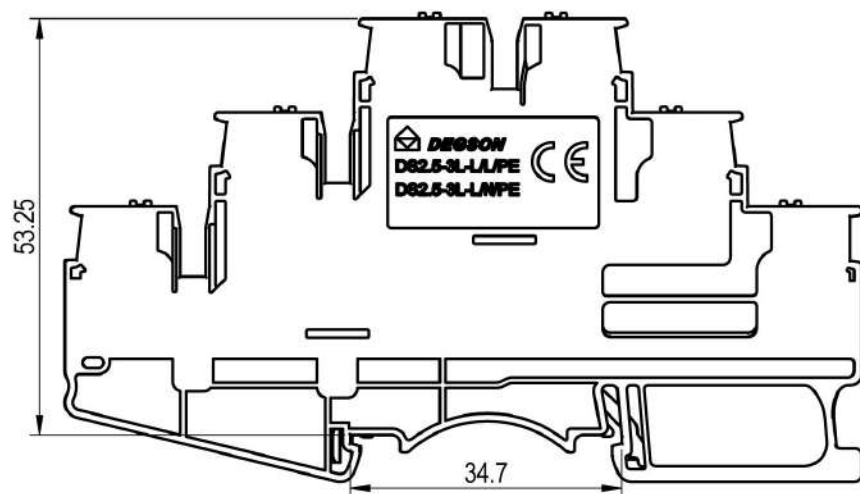

МИГ ЭЛЕКТРО
скорость и точность

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage (V) /Current (A)	/	/	/
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution	III/3	III/2	II/2
额定电压/电流/Rated Voltage (V) /Current (A)	/	/	/
额定脉冲电压 (KV) /Rate Impulse Voltage (KV)	6	/	/
最大负载电流/Maximum load current	24A (具有4mm ² 导线横截面, 刚性 (with 4mm ² conductor cross section, rigid))		
线径范围(硬线和软线)/Wire Range (rigid and flexible) (AWG/mm ²)	26~12 / 0.2~2.5&4 (Sol)		
间距/Pitch (mm) /线数范围/Poles	5.2/N=01P		
剥线长度/Stripping length (mm)	10~12		
使用温度范围/Operating temperature (°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

DEGSON	MATERIAL: /	SURFACE/COLOR: /
	MAT NO./REV: /	MAT STATUS: /
APPD: Li GL	2022.06.07	NAME
CHKD: Ma EK	2022.06.07	DS2.5-3L-L/N/PE-01P-1Y-00A(H)
DRFT: Liu CB	2022.06.07	DRAWING NO.
		TYPE
		CUSTOMER DRAWING
		DRAWING STATUS
		SCALE
		SHEET

00	/	/	Liu CB	2022.06.07
REV	ECN	DESCRIPTION	DRFT	DATE