


Category: 回拉式弹簧接线/Plug-in terminal-plug

Product name: 回拉式弹簧接线端子
TC1.5-2X2-GY

Product Description: 4.2mm CE,UL

Product Picture

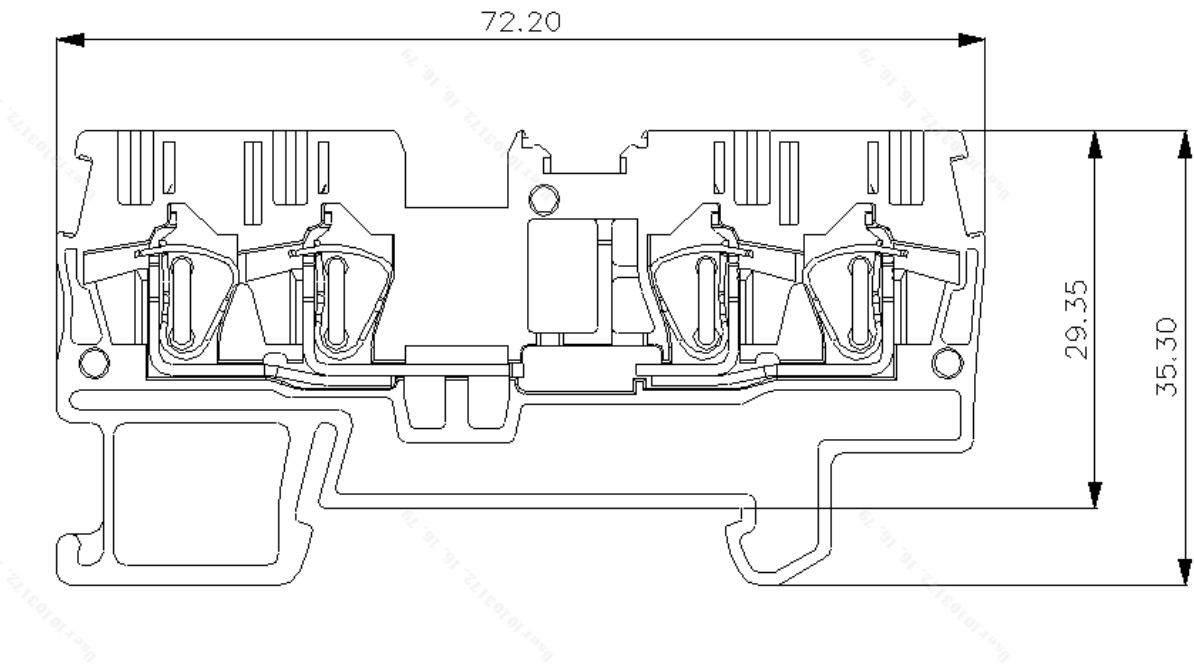

基本信息 /Basic Information

产品型号 SUPU ID	TC1.5-2X2-GY
宽度 Width	4.2mm
产品层数 Number of levels	1
接线位数 Number of connections	4
接线方式 Connection method	回拉式弹簧接线/ Spring cage connection
防护等级 Protection Level	IP20

工作温度	-40~+105℃
Work temperature	

IEC数据 /IEC Data

额定电流	17.5A
Rated Current	
额定电压	500V
Rated Voltage	
过压类别	Ⅲ
Overvoltage category	
污染等级	3
Pollution degree	
额定冲击电压	6.0KV
Rated impulse voltage	
刚性导线截面积	0.2-1.5mm ²
Conductor cross section solid	
柔性导线截面积	0.2-1.5mm ²
Conductor cross section flexible	
柔性导线截面积，带绝缘管套	0.2-1.5mm ²
Conductor cross section flexible,with furrule	
剥线长度	10mm
Stripping length	

UL数据 /UL Data

使用组别	B	C	D
Use group			
额定电流	15A	15A	-
Rated Current			
额定电压	300V	300V	-
Rated Voltage			
额定接线容量	24-16AWG		
Rated cross section			

材料信息 /Material Data

绝缘材料	PA66
Insulation material	
绝缘材料组别	I
Insulation material group	
阻燃等级，符合UL94	V0
Flame retardant grade, UL94 compliance	

导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Sn,Plated

产品认证 /Product Certification

认证图标
Certificate



UL证书号
UL file No.

VDE证书号
VDE No.

TUV证书号
TUV No.

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

File date : 2024-09-13 14:02

Product Entry : 2023-09-07

The right to modify data belongs to
Supu.