


2 Plastic fixed cable gland M type

CE SGS IP68

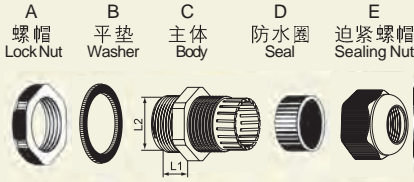

- **产品材质:** A.C.E 部位采用 UL 认可的尼龙 PA66, B.D 部位采用丁腈橡胶。
- **螺纹规格:** 公制(Metric), 德制(PG), 英制(G), 美制(NPT)。
- **工作温度:** 静态 -40℃ 至 100℃, 瞬时耐热至 120℃, 动态 -20℃ 至 80℃, 瞬间耐热至 100℃。
- **产品特性:** 特殊的夹紧爪与橡胶件设计, 夹紧电缆范围大, 抗拉力特强, 可防水, 防尘, 防盐, 耐酸碱, 酒精, 油脂及一般溶剂。
- **颜色种类:** 黑色(RAL9005)、浅灰(RAL7035)、银色(RAL7001), 特殊颜色可定做。

- **Material:** Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of nitrile butadiene rubber (NBR).
- **Thread spec.:** Metric, PG, G, NPT.
- **Working temperature:** -40℃ to 100℃ in static state, instantaneous heat resistance up to 120℃; -20℃ to 80℃ in dynamic state, instantaneous heat resistance up to 100℃.
- **Characteristics:** Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.
- **Color:** Black(RAL9005), light grey(RAL7035), silver(RAL7001) as well as special colors that can be designed at request.



产品型号 Model	螺纹规格 Thread Size	适用电缆 Cable Range (mm)	螺纹外径 Thread O. D. L2 (mm)	螺纹长度 Thread Length L1 (mm)	扳手直径 Spanner Size A & E (mm)	数量 / 袋 Qty/bag
M8	M8x1.25	2.5~4.5	8	8	13/12	100
M8	M8x1.25	1~2.5	8	8	13/12	100
M10	M10x1.5	3~6	10	8	15/13	100
M10	M10x1.5	1.5~3	10	8	15/13	100
M12	M12x1.5	3~6.5	12	9	18/16	100
M12	M12x1.5	2~5	12	9	18/16	100
M16	M16x1.5	4~8	16	9	22/19	100
M16	M16x1.5	2~6	16	9	22/19	100
M18	M18x1.5	5~10	18	9	24/22	100
M18	M18x1.5	3~7	18	9	24/22	100
M20	M20x1.5	6~11	20	10	27/24	100
M20	M20x1.5	5~9	20	10	27/24	100
M22	M22x1.5	10~13	22	10	30/27	100
M22	M22x1.5	7~12	22	10	30/27	100
M24	M24x1.5	12~15	24	10	30/28	100
M24	M24x1.5	10~12	24	10	30/28	100
M25	M25x1.5	12~15	25	11	31/28	100
M25	M25x1.5	10~12	25	11	31/28	100
M27	M27x1.5	13~18	27	12	35/33	100
M27	M27x1.5	9~16	27	12	35/33	100
M28	M28x1.5	13~18	28	12	35/33	100
M28	M28x1.5	9~16	28	12	35/33	100
M30	M30x1.5	16~21	30	12	37/35	50
M30	M30x1.5	13~18	30	12	37/35	50
M32	M32x1.5	16~21	32	12	38/35	50
M32	M32x1.5	13~18	32	12	38/35	50
M36	M36x1.5	18~25	36	12	45/42	50
M36	M36x1.5	13~20	36	12	45/42	50
M40	M40x1.5	22~32	40	15	52/52	20
M40	M40x1.5	20~26	40	15	52/52	20
M46	M46x1.5	22~32	46	15	58/52	20
M46	M46x1.5	20~26	46	15	58/52	20
M50	M50x1.5	32~38	50	18	62/58	20
M50	M50x1.5	25~31	50	18	62/58	20
M58	M58x1.5	37~44	58	18	70/64	20
M58	M58x1.5	29~35	58	18	70/64	20
M63	M63x1.5	37~44	63	18	72/64	20
M63	M63x1.5	29~35	63	18	72/64	20
M71	M71x1.5	42~50	71	30	83/77	10
M71	M71x1.5	32~40	71	30	83/77	10