



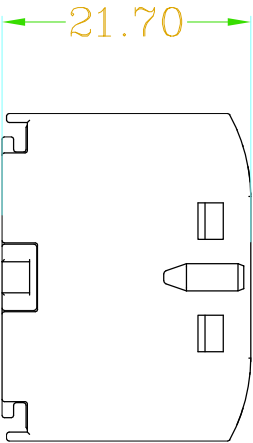

宁波速普电子有限公司
NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification

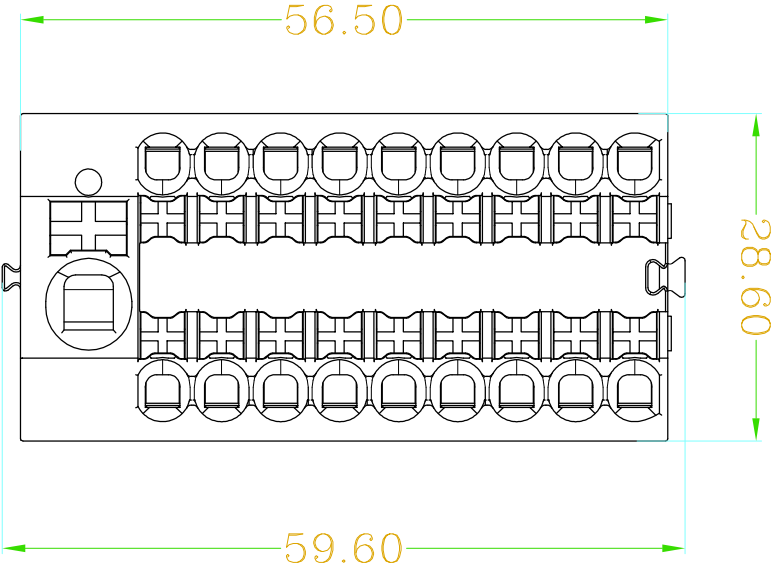

订货信息 Order Info

订货号	颜色
PART NUMBER	COLOR
TPA 6/2.5-19-GY	灰色 Gray
TPA 6/2.5-19-OG	橙色 Orange
TPA 6/2.5-19-BL	蓝色 Blue
TPA 6/2.5-19-GN	绿色 Green

未标注公差参照GB/T14486

基本尺寸	0-3	>3-6	>6-10	>10-14	>14-18	>18-24	>24-30	>30-40	>40-50	>50-65	>65-80	>80-100	>100-120	>120-140
公差	±0.08	±0.09	±0.10	±0.12	±0.14	±0.16	±0.18	±0.21	±0.24	±0.28	±0.32	±0.36	±0.41	±0.46

IEC 额定数据/IEC Rated data		输入端/Input		输出端/Output	
接线范围/Wire range		0.5-10mm²		0.2-4mm²	
单股导线/Solid		0.5-10mm²		0.2-4mm²	
软导线/Stranded		0.5-6mm²		0.2-2.5mm²	
带端头软导线/Stranded with ferrules without plastic sleeve		0.5-6mm²		0.2-2.5mm²	
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve		0.5-6mm²		0.2-2.5mm²	
额定电压/Rated voltage		500V		500V	
额定电流/Rated current		41A		24A	
剥线长度/Strip length		9-10mm			
额定脉冲耐受电压/Rated surge voltage		6kV			
污染等级/Pollution degree		2			
过电压类别/Surge voltage category		III			
UL 额定数据/UL Rated data	B	C	D		
额定电流/Rated current	50A	50A	5A		
额定电压/Rated voltage	300V	300V	600V		
接线范围/Wire range	20-8	24-12			
其他信息/Other information					
塑件/Housing		PA66			
触点材料/Contact		铜合金/Copper alloy			
镀层/Coating		锡/Tin			
阻燃等级/Flame retardant rating		V0			
使用环境温度/Usage ambient temperature		-40℃ - +85℃			
导轨尺寸/rails Size		SP35X7.5/SP35X15			
认证/Approval					

	Rev. 01	Name
单位/Unit	mm	2.5mm ² 直插式带输入19位配电块 Push-in type Power Distribution Block 2.5mm ² 19 Bit