
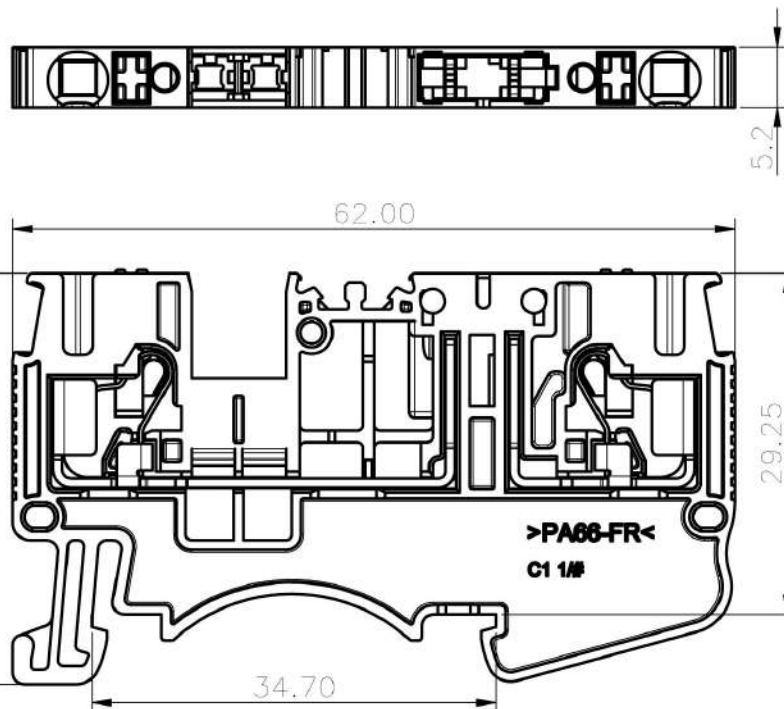


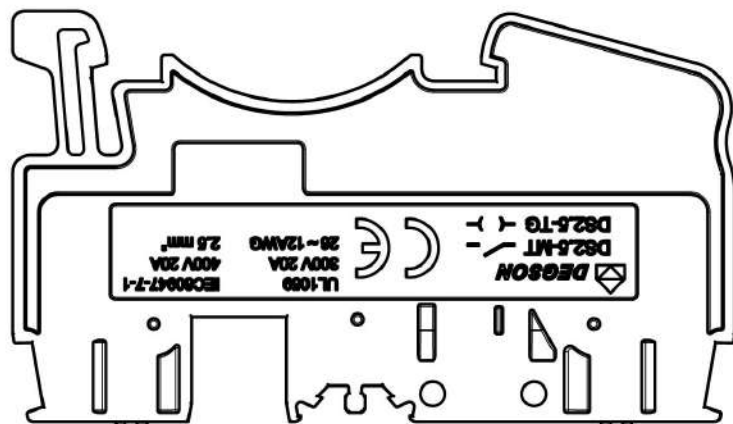

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电压/Rated Voltage(V)/Current(A)

B

C

D

300V/20

300/20

600/5

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

III/3

III/2

II/2

额定电压/电压/Rated Voltage(V)/Current(A)

400/20

/

/

额定脉冲电压(KV)/Rate Impulse Voltage(KV)

6

/

/

线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)

26~12/0.2~2.5&4(SOL)

/

/

间距(Pitch)(mm)/线数范围/Poles

5.2/N=01P

/

/

剥线长度/Stripping length(mm)

10~12

/

/

使用温度范围/Operating temperature(°C)

-40~+105

/

/

符合 RoHS 环保要求/Conform to RoHS

Yes

/


/

标准颜色编号/Standard color number: PANTONE / RAL

/

/

/

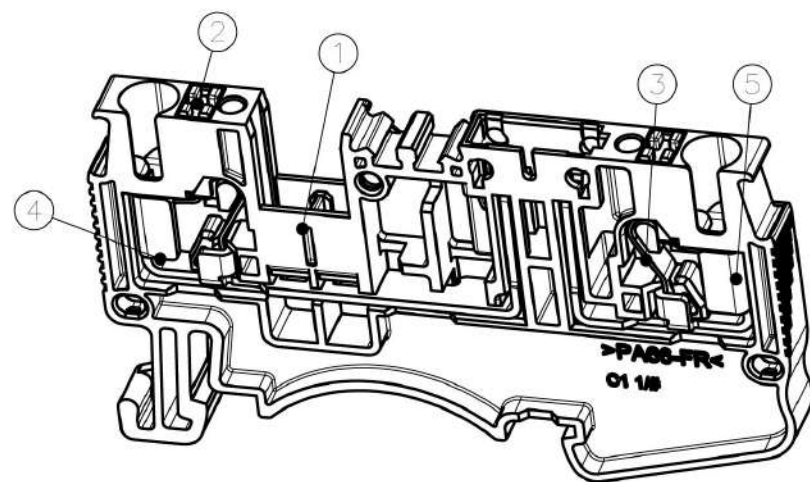

5	Current carrier 2	Copper	Sn Plated
4	Current carrier 1	Copper	Sn Plated
3	Spring	Stainless steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

DEGSON		MATERIAL: /		SURFACE: /	
APPD: LiGL		MAT NO./REV: /		MAT STATUS: /	
CHKD: MaEK		NAME		DS2.5-TG-01P-1Y-00A(H)	
DRFT: HuangS		DRAWING NO.		DRAWING STATUS	
REV		DATE		SCALE	
ECN		DESCRIPTION		SHEET	
1		2		3	
4		5		6	