
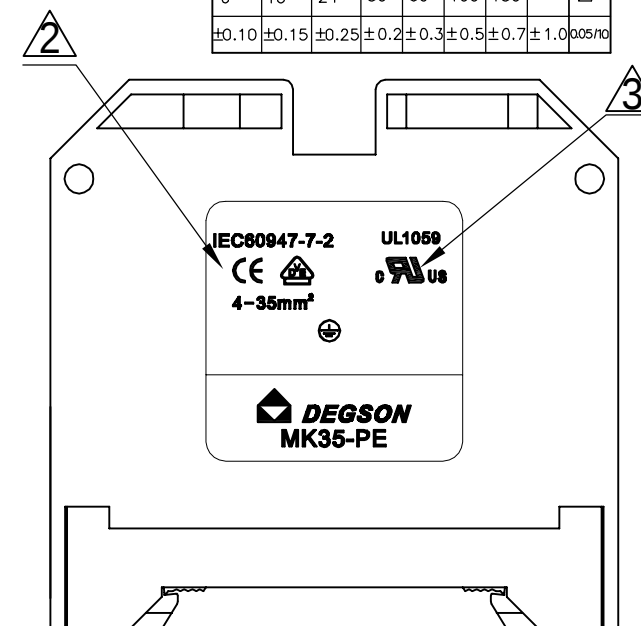
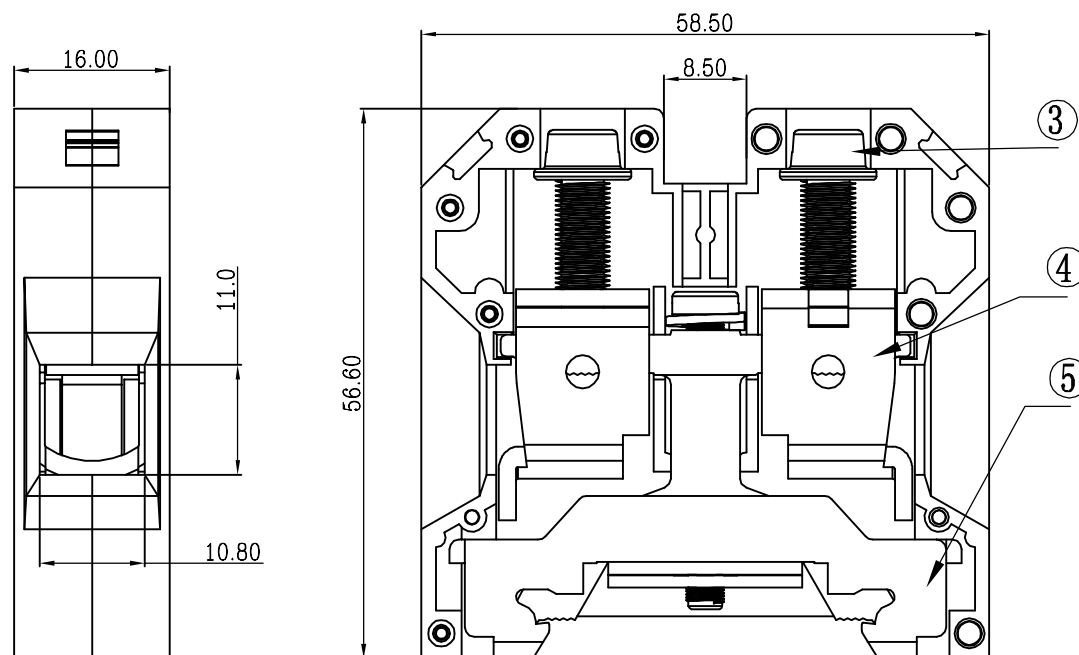


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
1		品名、料号增加环保标示“(H)”	LJH	12/10/07	
2		增加VDE刻字及参数	Zengy	09/10/08	
3		增加UL刻字	HD	10/21/09	
4	10-0346	方块品名与材料更新	HD	10/11/10	

Notes:

1. Thickness: 16mm
2. Wire Range: 8~2AWG , 4~35mm²
3. Max. Torque Value: M6 , 25.5kgf.cm
4. Operation temperatures: -40℃~+105℃
5. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						—
to	over	over	to	over	over	over	over	over	—
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 200	200 to 250	250 to 300	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	±0.05/10	—

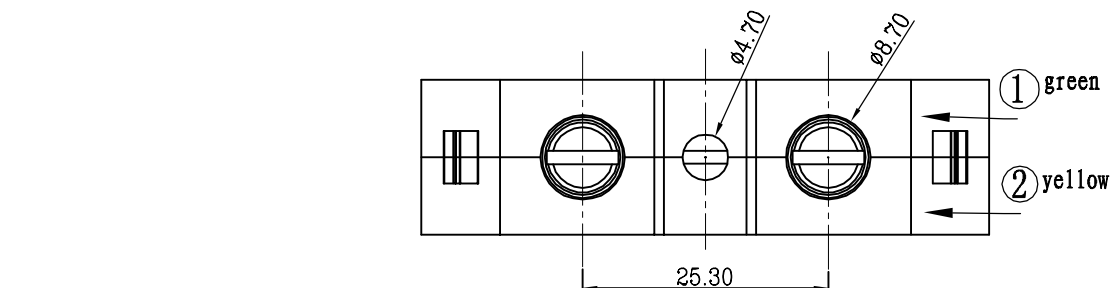

5	MK35-PE-Ground contact	6049B00010 (H)	1		
4	MK35-Cage	X000001380 (H)	2	Iron	Cr ³⁺ Zn
3	MK35-PE-Screw	S000002030 (H)	2	Steel	Cr ³⁺ Zn

2	MK35-PE-Housing	6049A0801A (H)	1	PA66	UL94V-0
1	MK35-PE-Housing	6049A0401A (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETACHED LISTS			 NAME MK35-PE-01P-1Y-00A (H) DRAWING NO. MK35-PE-E01 /PART NO. DO NOT SCALE DRAWING		
	TOLERANCES EXCEPT AS NOTED				
	MM				
	.0 ±				
	.00 ±				
	.000 ±		宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD		
	±				
	±				
	±				
	±				
ANGLES ± 1°		SIZE A3			
		REV T4 10/11/10			
THIRD ANGLE PROJECTION		OF 1			
SCALE : 1:1					