
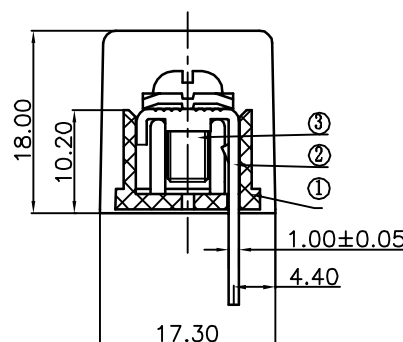
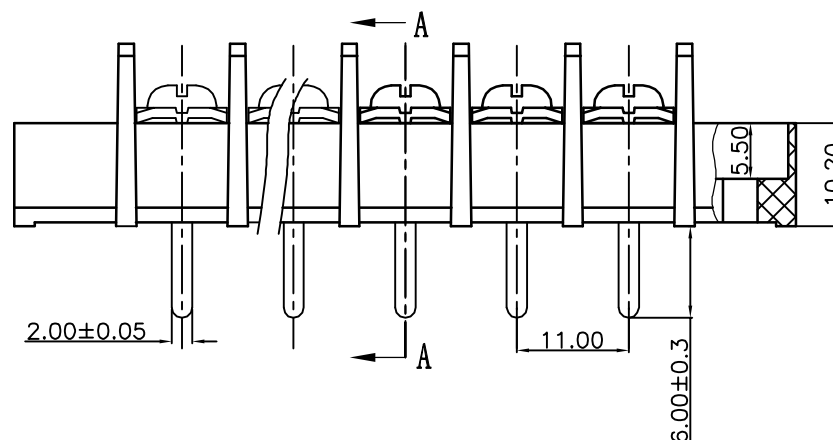


REVISION RECORD					
REV	ECO	DESCRIPTION	DRFT	DATE	
2		图面更新	HW	06/05/06	
3		增加UL刻字	CSX	11/23/06	
4		品名、料号增加环保标识“(H)”	YeJ	12/08/07	




Notes:


1. Pitch:11.0mm Pole:2-20P
2. Rated current:20A
3. Rated voltage:300V
4. Operation temperatures:-40℃~+105℃
5. Withstanding Voltage:AC2000V/1min
6. Insulation Resistance:500MΩ/DC500V
7. Wire Range:22~12AWG
8. Max. Torque Value: 12.24kgf. cm.
9. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to	over	to	over	to	over	to	over	
6	6 to 10	10 to 24	30 to 60	60 to 100	100 to 150	150 to 150	150 to 150	—
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

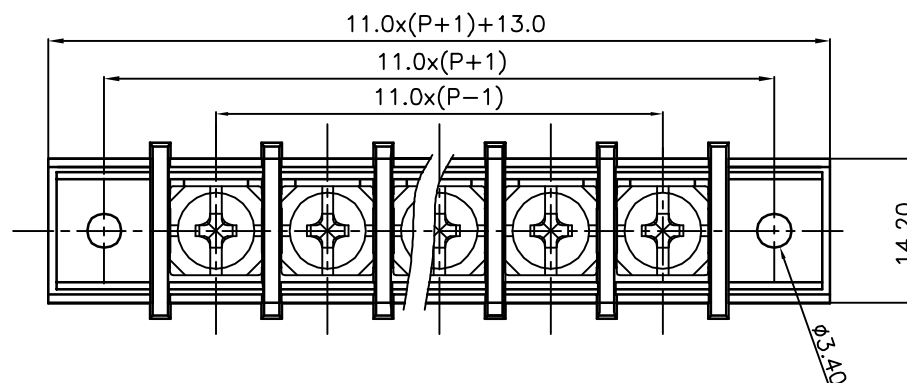

Section A-A

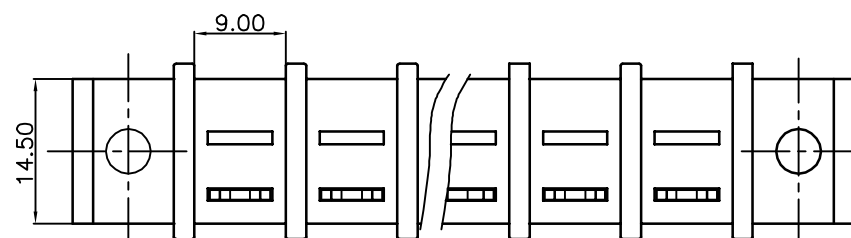

3	4*8 big cover and bright Screws	S000000580 (H)	XX	Steel	Ni Plated			
2	DG65S Pin header	5005B00100 (H)	XX	Brass	SnCe			
1	DG65S-A housing	5005M0YXXA (H)	1	PA66	UL94V-0			
ITEM		NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES		
DETAILED LISTS	← MM (INCH) →		DFTO Haoyh	DATE 03/03/04"				
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE				
			MFO	DATE				
			APPVL	DATE				
	MM .0 ± .00 ± .000 ±		NAME DG65S-A-XXP-1Y-00A(H)					
							MATERIAL :	
							G.E :	
	ANGLES ± 1°		DRAWING NO. DG65S-E03				SIZE A3	REV T4 12/08/06
	 THIRD ANGLE PROJECTION		/PART NO.				SHEET 1 OF 1	
			DO NOT SCALE DRAWING					
SCALE : 1:1								