

Rittal – The System.

Faster – better – everywhere.



TS 8800.752 Cable duct

Stand: 30/01/2023 (Quelle: rittal.com/com-en)

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



TS 8800.752 - Cable duct

With special DIN punchings for direct mounting on the enclosure section or on surfaces such as mounting plates.

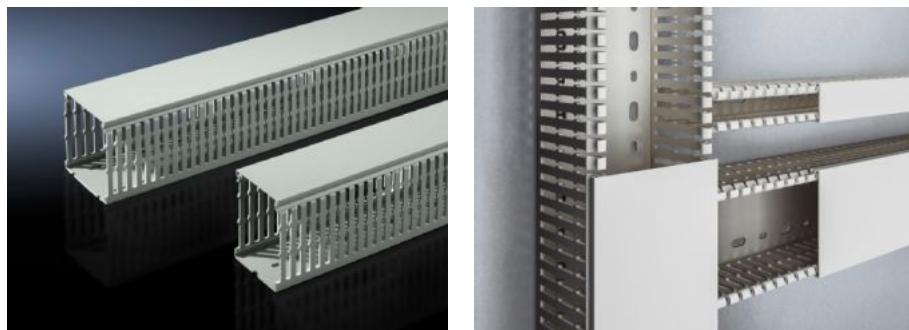

Eigenschaften

| | |
|---------------------|---|
| Model No. | TS 8800.752 |
| Design | for mounting plates |
| Product description | With special DIN punchings for direct mounting on the enclosure section or on surfaces such as mounting plates. |
| Material | Hard PVC Flame-resistant, self-extinguishing Temperature resistant to +60 °C |
| Colour | Similar to RAL 7030 |
| Supply includes | Cable duct with cover |
| Bar width | 5.5 mm |
| Slot width | 4.5 mm |

Eigenschaften

| | |
|------------------------------|---|
| Installation options | <p>With special DIN punchings for direct mounting on the enclosure section or on surfaces such as mounting plates</p> <p>If the mounting plate is installed flush with the enclosure frame at the rear (installation position ± 0 mm), the horizontally mounted cable ducts are aligned with the cable ducts mounted on the enclosure section.</p> <p>Cable duct 50 mm wide for individually sited VX25 enclosures with side panel on the vertical section, on the left and right adjacent to the mounting plate.</p> <p>Cable duct 100 mm for mounting on the vertical enclosure frame with bayed enclosures.</p> <p>To fit the cable ducts for vertical TS sections.</p> <p>If the TS mounting plate is installed in the rearmost position, the horizontally mounted cable ducts are flush with the vertical ones.</p> <p>For external mounting on surfaces.</p> |
| Note | Can be shortened for other dimensions. |
| Dimensions | Width: 60 mm Depth: 80 mm Length: 2,000 mm |
| Packs of | 18 pc(s). |
| Weight/pack | 25.236 kg |
| Copper weight (kg per piece) | 0 |
| Customs tariff number | 39259020 |
| EAN | 4028177445468 |
| ETIM 7.0 | EC000012 |
| ECLASS 8.0 | 27400703 |

Approbationen

| | |
|---------------|------------------------------|
| Approbationen | GOST |
| Erklärungen | Declaration of conformity UK |