


Category: 螺钉接线/Plug-in terminal-plug

Product name: 螺钉接线端子TU2.5-3-GY

Product Description: 5.2mm , 1000V , 24A CE,UL



Product Picture

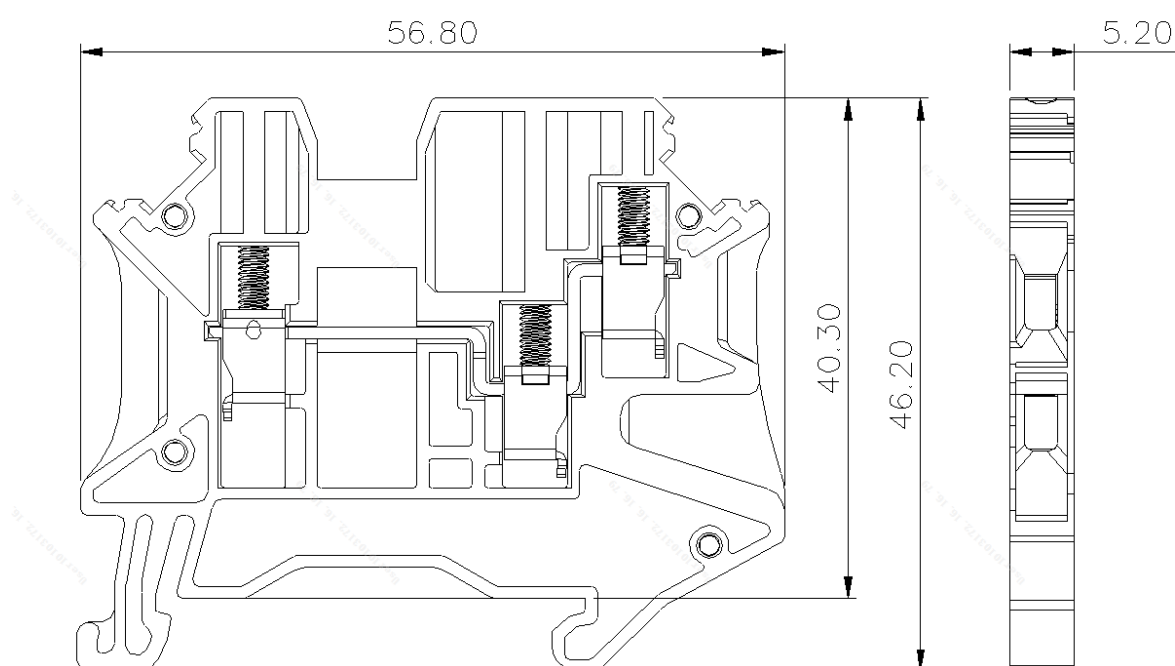

基本信息 /Basic Information

产品型号 SUPU ID	TU2.5-3-GY
宽度 Width	5.2mm
产品层数 Number of levels	1
接线位数 Number of connections	3
接线方式 Connection method	螺钉接线 Screw connection

防护等级 Protection Level	IP20
工作温度 Work temperature	-40~+105℃

IEC数据 /IEC Data

额定电流 Rated Current	24A
额定电压 Rated Voltage	1000V
过压类别 Overvoltage category	III
污染等级 Pollution degree	3
额定冲击电压 Rated impulse voltage	8.0KV
刚性导线截面积 Conductor cross section solid	0.2-4mm ²
柔性导线截面积 Conductor cross section flexible	0.2-2.5mm ²
柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	0.2-2.5mm ²
锁线螺钉规格 Locking screw Specification	M2.5
额定扭矩 Rated Torque	0.4N.m
固定螺钉规格 Fixed Screw Specification	-
额定扭矩 Rated Torque	-
剥线长度 Stripping length	9-11mm

UL数据 /UL Data

使用组别 Use group	B	C	D
额定电流 Rated Current	20A	20A	-
额定电压 Rated Voltage	300V	300V	-

额定接线容量	
Rated cross section	26-12AWG

材料信息 /Material Data

绝缘材料	PA66
Insulation material	
绝缘材料组别	I
Insulation material group	
阻燃等级，符合UL94	V0
Flame retardant grade, UL94 compliance	
导电体材料	Copper alloy
Contact material	
导电体表面镀层	Sn,Plated
Surface characteristics	

产品认证 /Product Certification

认证图标	
Certificate	
UL证书号	
UL file No.	
VDE证书号	
VDE No.	
TUV证书号	
TUV No.	

包装信息 /Packing Data

包装信息	125pc
Packaging information	

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

File date : 2024-09-13 16:04

Product Entry : 2023-09-20

The right to modify data belongs to
Supu.