

# NINGBO KLS ELECTRONIC CO.,LTD

## BZX55C Series

### Zener diode

**Voltage Range**  
2.4 to 75 Volts

#### Features

1.High reliability

#### Applications

Voltage stabilization


#### Construction

Silicon epitaxial planer

#### Absolute Maximum Ratings

T<sub>j</sub>=25°C

#### DO-35

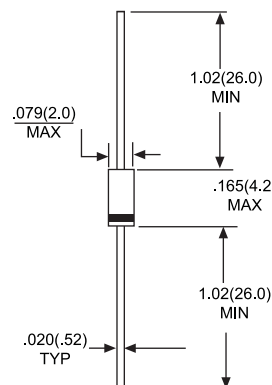

Dimensions in inches and (millimeters)

| Parameter                 | Test Conditions            | Type | Symbol           | Value                          | Unit |
|---------------------------|----------------------------|------|------------------|--------------------------------|------|
| Power dissipation         | I=4mm T <sub>L</sub> ≤25°C |      | P <sub>D</sub>   | 500                            | mW   |
| Z-current                 |                            |      | I <sub>z</sub>   | P <sub>D</sub> /V <sub>z</sub> | mA   |
| Junction temperature      |                            |      | T <sub>j</sub>   | 175                            | °C   |
| Storage temperature range |                            |      | T <sub>stg</sub> | -65~+175                       | °C   |

#### Maximum Thermal Resistance

T<sub>j</sub>=25°C

| Parameter        | Test Conditions                | Symbol            | Value | Unit |
|------------------|--------------------------------|-------------------|-------|------|
| Junction ambient | I=4mm T <sub>L</sub> =constant | R <sub>thJA</sub> | 500   | K/W  |

#### Electrical Characteristics

T<sub>j</sub>=25°C

| Parameter       | Test Conditions       | Type | Symbol         | Min | Typ | Max | Unit |
|-----------------|-----------------------|------|----------------|-----|-----|-----|------|
| Forward voltage | I <sub>F</sub> =200mA |      | V <sub>F</sub> |     |     | 1.5 | V    |

| Type   | Vznom | Izt | for Vzr and | r    | rzk at | Izk | IR at | VR  | TKvz        |
|--------|-------|-----|-------------|------|--------|-----|-------|-----|-------------|
| BZX55C | V     | mA  | V           | Ω    | Ω      | mA  | uA    | V   | %/k         |
| 2V4    | 2.4   | 5   | 2.28~2.56   | <85  | <600   | 1   | <50   | 1   | -0.09~-0.06 |
| 2V7    | 2.7   | 5   | 2.5~2.9     | <85  | <600   | 1   | <10   | 1   | -0.09~-0.06 |
| 3V0    | 3.0   | 5   | 2.8~3.2     | <85  | <600   | 1   | <4    | 1   | -0.08~-0.05 |
| 3V3    | 3.3   | 5   | 3.1~3.5     | <85  | <600   | 1   | <2    | 1   | -0.08~-0.05 |
| 3V6    | 3.6   | 5   | 3.4~3.8     | <85  | <600   | 1   | <2    | 1   | -0.08~-0.05 |
| 3V9    | 3.9   | 5   | 3.7~4.1     | <85  | <600   | 1   | <2    | 1   | -0.08~-0.05 |
| 4V3    | 4.3   | 5   | 4.0~4.6     | <75  | <600   | 1   | <1    | 1   | -0.06~-0.03 |
| 4V7    | 4.7   | 5   | 4.4~5.0     | <60  | <600   | 1   | <0.5  | 1   | -0.05~+0.02 |
| 5V1    | 5.1   | 5   | 4.8~5.4     | <35  | <550   | 1   | <0.1  | 1   | -0.02~+0.02 |
| 5V6    | 5.6   | 5   | 5.2~6.0     | <25  | <450   | 1   | <0.1  | 1   | -0.05~+0.05 |
| 6V2    | 6.2   | 5   | 5.8~6.6     | <10  | <200   | 1   | <0.1  | 2   | 0.03~0.06   |
| 6V8    | 6.8   | 5   | 6.4~7.2     | <8   | <150   | 1   | <0.1  | 3   | 0.03~0.07   |
| 7V5    | 7.5   | 5   | 7.0~7.9     | <7   | <50    | 1   | <0.1  | 5   | 0.03~0.07   |
| 8V2    | 8.2   | 5   | 7.7~8.7     | <7   | <50    | 1   | <0.1  | 6.2 | 0.03~0.08   |
| 9V1    | 9.1   | 5   | 8.5~9.6     | <10  | <50    | 1   | <0.1  | 6.8 | 0.03~0.09   |
| 10     | 10    | 5   | 9.4~10.6    | <15  | <70    | 1   | <0.1  | 7.5 | 0.03~0.1    |
| 11     | 11    | 5   | 10.4~11.6   | <20  | <70    | 1   | <0.1  | 8.2 | 0.03~0.11   |
| 12     | 12    | 5   | 11.4~12.7   | <20  | <90    | 1   | <0.1  | 9.1 | 0.03~0.11   |
| 13     | 13    | 5   | 12.4~14.1   | <26  | <110   | 1   | <0.1  | 10  | 0.03~0.11   |
| 15     | 15    | 5   | 13.8~15.6   | <30  | <110   | 1   | <0.1  | 11  | 0.03~0.11   |
| 16     | 16    | 5   | 15.3~17.1   | <40  | <170   | 1   | <0.1  | 12  | 0.03~0.11   |
| 18     | 18    | 5   | 16.8~19.1   | <50  | <170   | 1   | <0.1  | 13  | 0.03~0.11   |
| 20     | 20    | 5   | 18.8~21.2   | <55  | <220   | 1   | <0.1  | 15  | 0.03~0.11   |
| 22     | 22    | 5   | 20.8~23.3   | <55  | <220   | 1   | <0.1  | 16  | 0.04~0.12   |
| 24     | 24    | 5   | 22.8~25.6   | <80  | <220   | 1   | <0.1  | 18  | 0.04~0.12   |
| 27     | 27    | 5   | 25.1~28.9   | <80  | <220   | 1   | <0.1  | 20  | 0.04~0.12   |
| 30     | 30    | 5   | 28~32       | <80  | <220   | 1   | <0.1  | 22  | 0.04~0.12   |
| 33     | 33    | 5   | 31~35       | <80  | <220   | 1   | <0.1  | 24  | 0.04~0.12   |
| 36     | 36    | 5   | 34~38       | <80  | <220   | 1   | <0.1  | 27  | 0.04~0.12   |
| 39     | 39    | 2.5 | 37~41       | <90  | <500   | 0.5 | <0.1  | 30  | 0.04~0.12   |
| 43     | 43    | 2.5 | 40~46       | <90  | <600   | 0.5 | <0.1  | 33  | 0.04~0.12   |
| 47     | 47    | 2.5 | 44~50       | <110 | <700   | 0.5 | <0.1  | 36  | 0.04~0.12   |
| 51     | 51    | 2.5 | 48~54       | <125 | <700   | 0.5 | <0.1  | 39  | 0.04~0.12   |
| 56     | 56    | 2.5 | 52~60       | <135 | <1000  | 0.5 | <0.1  | 43  | 0.04~0.12   |
| 62     | 62    | 2.5 | 58~66       | <150 | <1000  | 0.5 | <0.1  | 47  | 0.04~0.12   |
| 68     | 68    | 2.5 | 64~72       | <200 | <1000  | 0.5 | <0.1  | 51  | 0.04~0.12   |
| 75     | 75    | 2.5 | 70~79       | <250 | <1500  | 0.5 | <0.1  | 56  | 0.04~0.12   |

1) Tighter tolerances available request:

BZX55A...±1% of Vznom

BZX55B...±2% of Vznom

2) at Tj=150°C