
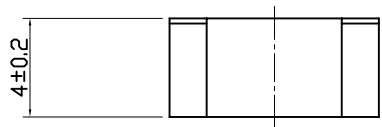
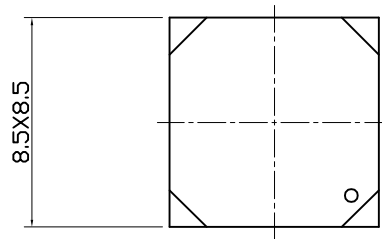


SPECIFICATION

1. Rated Voltage3.6V
2. Operating Voltage2.5~4.5V
3. Max. Rated Current80mA
4. Resonant Frequency2700Hz
5. Min. Sound Pressure Level.....88dB/10cm
6. Coil Resistance16±3 Ω
7. Case MaterialPPS
8. Operating Temperature-30~+70℃
9. Store Temperature-40~+85℃
10. Weight1g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Magnetic Buzzer			
				SMT-8540C			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCES UNLESS NOTED OTHERWISE: .X .X .XX .X .XXX .X 90° FORMED +2° ANGLES -4° FIRST ANGLE PROJECTION		APPROVALS		DATE			
		DRAWN			UNIT	DWG NO.	
		CHECKED			mm	KP3.840.865	
		APPROVED		05.02.03	SCALE	NOT TO SCALE	VER 1.1