





Category: 回拉式弹簧接线/Plug-in terminal-plug

Product name: 204901

Product Description: 6mm , 800V , 32A CE



Product Picture

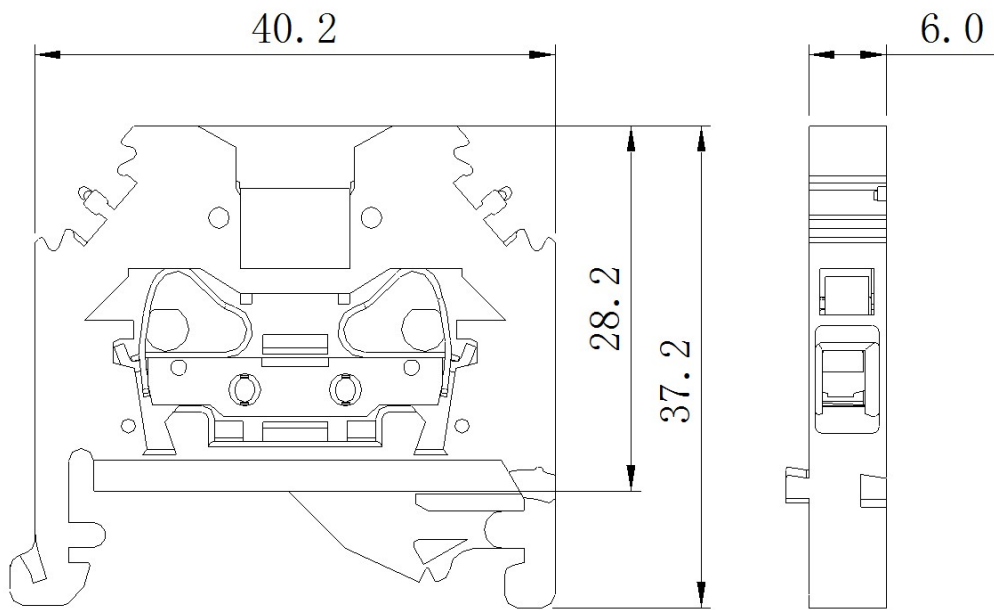

基本信息 /Basic Information

|                               |                                |
|-------------------------------|--------------------------------|
| 产品型号<br>SUPU ID               | 204901                         |
| 宽度<br>Width                   | 6mm                            |
| 产品层数<br>Number of levels      | 1                              |
| 接线位数<br>Number of connections | 2                              |
| 接线方式<br>Connection method     | 回拉式弹簧接线/Spring cage connection |
| 防护等级<br>Protection Level      | IP20                           |

|                          |           |
|--------------------------|-----------|
| 工作温度<br>Work temperature | -40~+105℃ |
|--------------------------|-----------|

## IEC数据 /IEC Data

|                                                                |                        |
|----------------------------------------------------------------|------------------------|
| 额定电流<br>Rated Current                                          | 32A                    |
| 额定电压<br>Rated Voltage                                          | 800V                   |
| 过压类别<br>Overvoltage category                                   | III                    |
| 污染等级<br>Pollution degree                                       | 3                      |
| 额定冲击电压<br>Rated impulse voltage                                | 8KV                    |
| 刚性导线截面积<br>Conductor cross section solid                       | 0.2-4mm <sup>2</sup>   |
| 柔性导线截面积<br>Conductor cross section flexible                    | 0.2-4mm <sup>2</sup>   |
| 柔性导线截面积，带绝缘管套<br>Conductor cross section flexible,with furrule | 0.2-2.5mm <sup>2</sup> |
| 剥线长度<br>Stripping length                                       | 8-9mm                  |

## UL数据 /UL Data

|                               |          |      |   |
|-------------------------------|----------|------|---|
| 使用组别<br>Use group             | B        | C    | D |
| 额定电流<br>Rated Current         | 20A      | 20A  | - |
| 额定电压<br>Rated Voltage         | 600V     | 600V | - |
| 额定接线容量<br>Rated cross section | 24-12AWG |      |   |

## 材料信息 /Material Data

|                                                       |      |
|-------------------------------------------------------|------|
| 绝缘材料<br>Insulation material                           | PA66 |
| 绝缘材料组别<br>Insulation material group                   | I    |
| 阻燃等级，符合UL94<br>Flame retardant grade, UL94 compliance | V0   |

|                                    |              |
|------------------------------------|--------------|
| 导电体材料<br>Contact material          | Copper alloy |
| 导电体表面镀层<br>Surface characteristics | Sn,Plated    |

## 产品认证 /Product Certification

认证图标  
Certificate



UL证书号  
UL file No.

VDE证书号  
VDE No.

TUV证书号  
TUV No.

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi  
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

File date : 2024-09-13 13:01

Product Entry : 2023-09-07

The right to modify data belongs to  
Supu.