

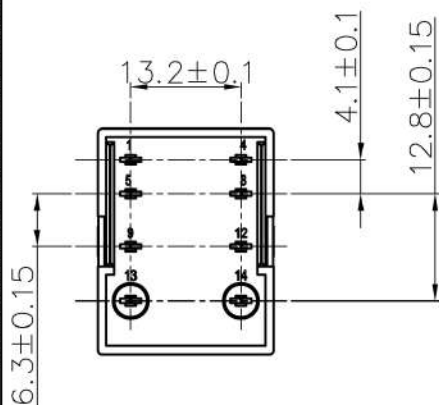
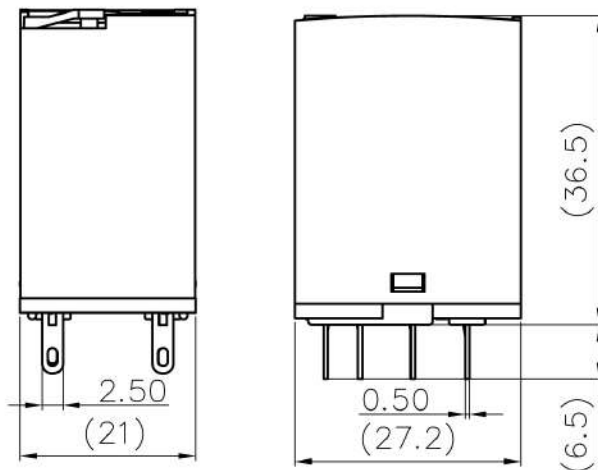
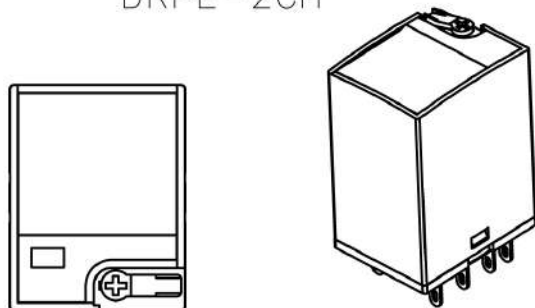
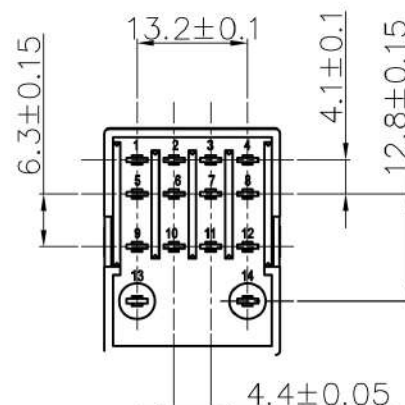


DRPE-2CH

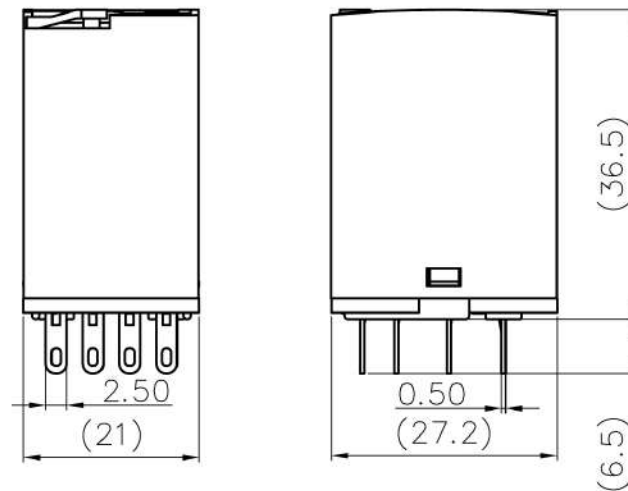

DRPE-4C

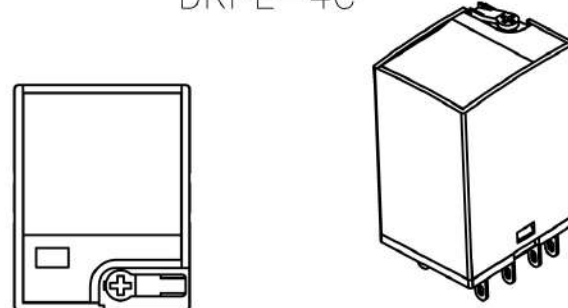

尺寸公差(mm)					0.05/10 ±
0 ~ 30	>30 ~ 60	>60 ~ 100	>100 ~ 150	>150 ~ 1.00	
±0.20	±0.30	±0.50	±0.70	±1.00	

Load current	2CH:10A 4C:5A
Load voltage	240VAC/28VDC
Electrical life	≥100,000
Mechanical life	≥10,000,000
Contact resistance	≤50mΩ/24V,1A
Operate voltage	AC(50Hz)<80% Ue; DC<75%Ue
Release voltage	AC(50Hz)>30% Ue; DC>10%Ue
Key controlled symbol	*
Operating temperature(°C)	-40°C ~ +70°C

Dielectric strengths	Between contacts:1000VAC,1Min (1mA)
	Between contacts of different poles:1500VAC,1Min (1mA)
Coil operating power	DC:0.93W/AC:1.2VA
	110%(Ue)
Max. allowable coil voltage	110%(Ue)

Conform to RoHS
Mark the height of the company LOGO
Mark the height of the "CE"
Printing for laser marking,printing content is clear ,no broken line,ect
Seal literal reference according to the foot position in the drawing
The words in the dotted box correspond to the list below



MATERIAL: /	SURFACE: /		
MAT.NO.: /	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
STATUS: /			
APPD: /	Description: DRPE-XX-XX-XX-07A(H)		
CHKD: /	DRAWING NO.: /		
DRFT: /	REV TO		
SIZE: A4	TYPE: PRODUCT DRAWING	SCALE: 1:1	SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------