


**DIN RAIL  
POWER SUPPLIES**



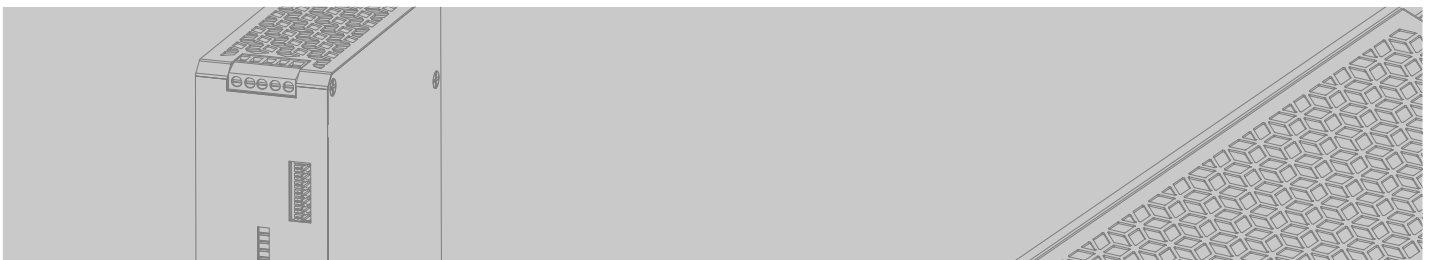

*ELCOMTECH - бренд  
премиального качества! Продукция  
изготавливается с  
применением уникальных технологий  
и новейших материалов.  
Главная цель компании сделать Hi-Rel  
продукцию доступной для  
общепромышленного применения.  
Гарантия на продукцию до 10 лет.*


## ADNDR-240

## DIN RAIL POWER SUPPLIES



Universal AC input range  
Build-in active PFC function  
DC output voltage adjustable  
Installed on DIN rail TS-35/7.5 or 15  
100% full load burn-in test  
3 years warranty

### Dimensions:(mm)

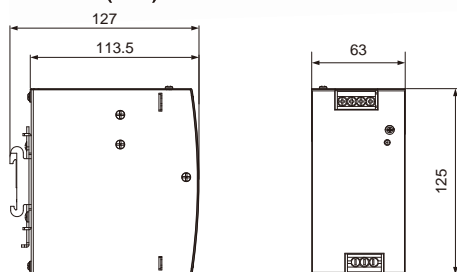

### Safety Standard:

UL 508  
IEC 62368-1  
BS EN/EN 62368-1

### EMC Standard:

EN 55032  
EN 61000-3-2,-3  
EN 61000-4-2,3,4,5,6,8,11



### Electrical Characteristics

Model No.	ADNDR-240-24	ADNDR-240-48
DC Voltage	24V	48V
Rated Current	10A	5A
Rated Power(Max)	240W	240W
Ripple & Noise(Max)	150mVp-p	150mVp-p
Input Voltage	90 ~ 264VAC    127 ~ 370VDC	
Inrush Current	20A/115VAC    35A/230VAC	
Efficiency	87%	88%
Working Temperature	-20 ~ +70 °C (Refer to "Derating Curve")	
Withstand Voltage	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC	
Protection	Short Circuit/Over Load/Over Voltage/Over Temperature	
Connection	I/P: 3 poles terminal Block, O/P: 4 poles terminal Block	