




Industrial & Electrical Components

**Miniature
P.C.B Relay**

Part No.

NRP-14



16A 240Vac 1 pole Slim relay
Compact dimension
UL/C-UL recognized
Sealed type available

CONTACT

Arrangement	1A / 1B / 1C
Contact Material	Silver Alloy
Contact Resistive	100 mΩ
Rating	16A 240VAC
Resistive load (cosφ=1)	16A 30VDC
Max. Switching Voltage	250VAC 30VDC
Max. Switching Current	20A
Max. Switching Power	4800VA / 480W
Expected life	
Mechanical	1×10 ⁷ Min
Electrical	1×10 ⁵ Min.

CHARACTERISTICS

Operate Time	20ms. Max.
Release Time	10ms. Max.
Initial breakdown voltage	
Between Coil & Contact	5000VAC (50/60Hz)for 1 min.
Between Open Contacts	1000VAC (50/60Hz)for 1 min.
Insulation Resistance	Min.100MΩ (500 VDC)
Shock:	
Endurance	10G
Damage	100G
Vibration	
Endurance	10 to 55 Hz ,1.5mm D.A.
Damage	10 to 55 Hz ,1.5mm D.A.
Humidity	40%~85%RH
Ambient temperature	-40 to +70
Unit weight	14g

ORDERING INFORMATION

e.g

NRP - 14 - C - 12D - H

Series: Miniature p.c.b Relay

Part No.

Contact Form:

C=1C/O; A = N/O; B= N/C

Coil Voltage: 12D= 12Vdc 24D= 24Vdc

Nil= 0.72W coil power


H= 0.54W coil power

COIL DATA (at 20)


Nominal Voltage (VDC)	Pick-up Voltage VDC(Max)	Drop-out Voltage VDC(Min)	Coil Resistance (Ω) \pm 10%		Nominal operating Power (W)	Max.Allowable Voltage
			High Sensitive 0.54W	Standard 0.72W		
3	2.40	0.15	17	13	0.54 / 0.72	130% of nominal Voltage
5	4.00	0.25	46	35		
6	4.80	0.30	67	50		
9	7.20	0.45	150	110		
12	9.60	0.60	270	200		
24	19.20	1.20	1050	800		
48	38.40	2.40	4250	3200		

DIMENSIONS



Unit: mm

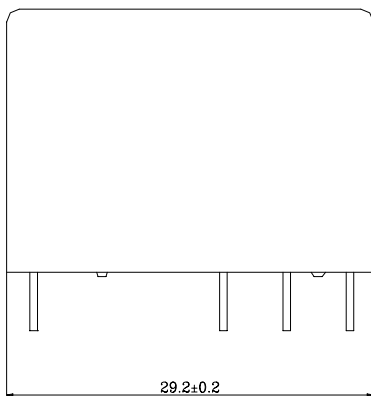

(BOTTOM VIEW)

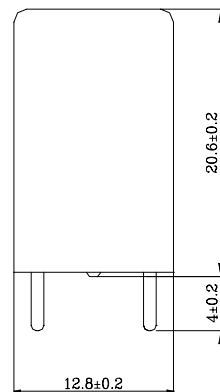

(BOTTOM VIEW)

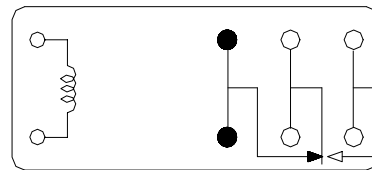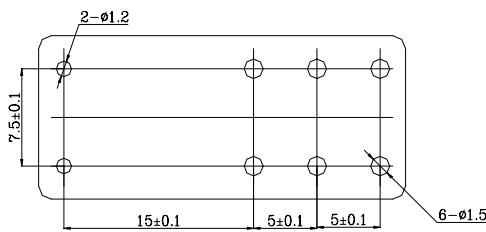

Industrial & Electrical Components