


**DIN RAIL
POWER SUPPLIES**



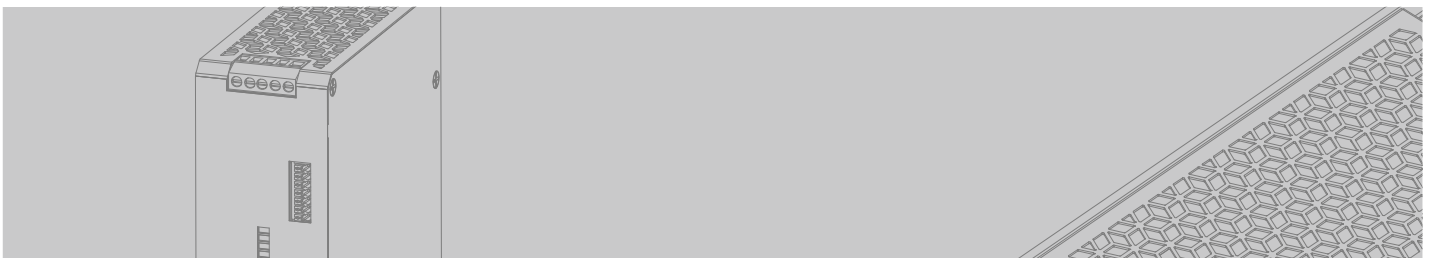

*ELCOMTECH - бренд
премиального качества! Продукция
изготавливается с
применением уникальных технологий
и новейших материалов.
Главная цель компании сделать Hi-Rel
продукцию доступной для
общепромышленного применения.
Гарантия на продукцию до 10 лет.*


ADSDR-240

DIN RAIL POWER SUPPLIES



Higher peak power
Built-in active PFC function
Built-in DC OK relay contact
DC output voltage adjustable
100% full load burn-in test
3 years warranty

Dimensions:(mm)

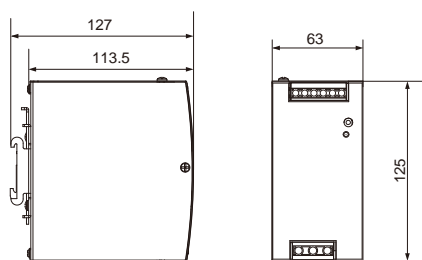

Safety Standard:

UL 61010
IEC 61010-1
BS EN/EN 61010-1

EMC Standard:

EN 55032
EN 61000-3-2,-3
EN 61000-4-2,3,4,5,6,8,11



Electrical Characteristics

Model No.	ADSDR-240-24	ADSDR-240-48
DC Voltage	24V	48V
Rated Current	10A	5A
Rated Power(Max)	240W	240W
Peak Power	360W (3sec.)	
Ripple & Noise(Max)	100mVp-p	120mVp-p
Input Voltage	90 ~ 264VAC 127 ~ 370VDC	
Inrush Current	33A/115VAC 55A/230VAC	
Efficiency	90%/115VAC 93%/230VAC	
Working Temperature	-25 ~ +70 °C (Refer to "Derating Curve")	
Withstand Voltage	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC	
Protection	Short Circuit / Over Load / Over Voltage / Over Temperature	
Connection	I/P :3 poles terminal Block O/P: 6 poles terminal Block	