

未注公差/General tolerances(mm)

0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
3	6	10	18	30	50	80	120	180	250	315	400	500	>500	±2°
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

UL 标准/UL Standard:

额定电压/电流/Rated Voltage(V)/Current(A)

300V/28 300/28 300/10

IEC 标准/IEC Standard:

过压类别/Overvoltage Category/污染等级/Pollution Degree

III/3 III/2 II/2

额定电压/电流/Rated Voltage(V)/Current(A)

500/32 / /

额定脉冲电压(KV)/Pulse Voltage(KV)

6.0 / /

线径范围(硬线和软线)/Wire Range(rigid and flexible)(AWG/mm²)

24~10 / 0.2~4&6(SoL)

间距/Pitch(mm)/线数范围/Poles

6.2/N=01P

剥线长度/Stripping length(mm)

11~13

使用温度范围/Operating temperature(°C)

-40~+105





符合 RoHS 环保要求/Conform to RoHS

Yes

标准颜色编号/Standard color number: PANTONE / RAL

/

Printing Black

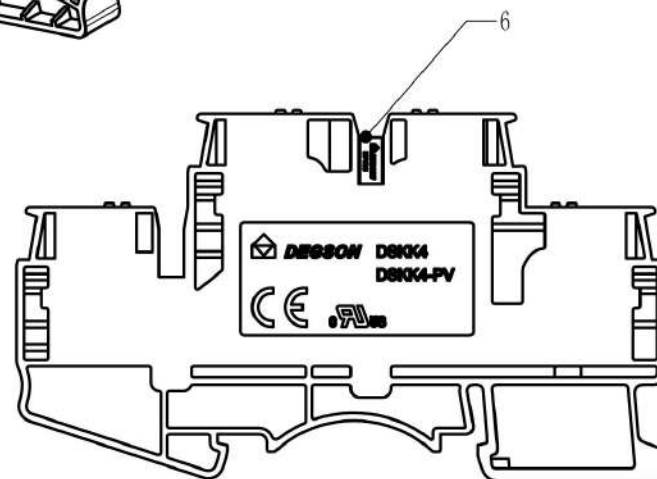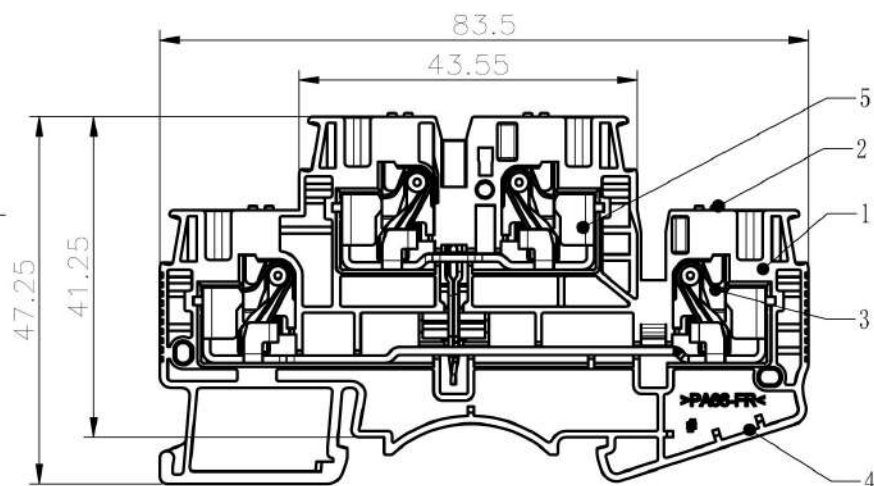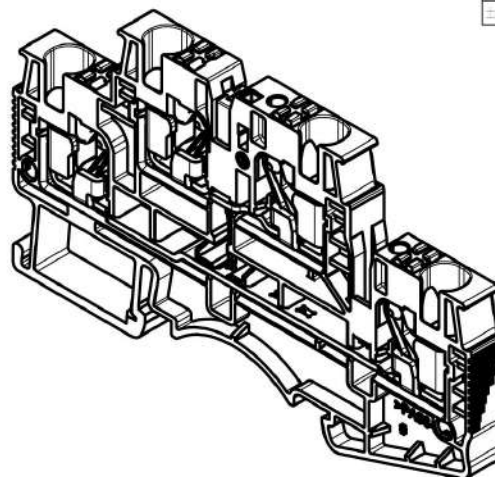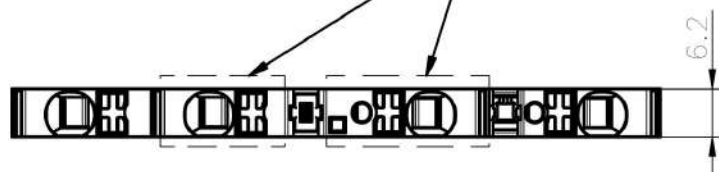

6	DPV2.5	/	/
5	Current Carrier 2	Copper	Sn Plated
4	Current Carrier 1	Copper	Sn Plated
3	Spring	Stainless Steel	/
2	Button	PA66+GF%	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

МИГ ЭЛЕКТРО
скорость и точность

			MATERIAL: /		SURFACE: /	
			MAT NO./REV: /		MAT STATUS: /	
APPD:	Li GL	2022.06.14	NAME DSKK4-PV-01P-1Y-00A (H)			
CHKD:	Ma EK	2022.06.14				
DRFT:	Zheng QG	2022.06.14	DRAWING NO.		TYPE	DRAWING STATUS
 A4			/		CUSTOMER DRAWING	/
					SCALE	SHEET
					2:1	1/1

00	/	/	Zheng QG	2022.06.14
REV	ECN	DESCRIPTION	DRFT	DATE