

Model Name: P238HVN01.0

Issue Date : 2021/07/27

()Preliminary Specifications

(*)Final Specifications

| Customer Signature | Date | AUO Display Plus | Date |
|--------------------|------|--|------|
| Approved By | | Approval by PM Director CT Wu | |
| Note | | Reviewed by RD Director Lamy Chen | |
| | | Reviewed by Project Leader Wallace Ting | |
| | | Prepared by PM Sophie Teng | |

Contents

| | |
|--|-----------|
| 1 Handling Precautions..... | 4 |
| 2 General Description..... | 5 |
| 2.1 Display Characteristics..... | 5 |
| 2.2 Absolute Maximum Rating of Environment | 6 |
| 2.3 Optical Characteristics | 7 |
| 2.4 Mechanical Characteristics | 10 |
| 3 TFT-LCD Module | 11 |
| 3.1 Block Diagram..... | 11 |
| 3.2 Interface Connection..... | 11 |
| 3.2.1 Connector Type..... | 11 |
| 3.2.2 Connector Pin Assignment | 11 |
| 3.3 Electrical Characteristics | 13 |
| 3.3.1 Absolute Maximum Rating..... | 13 |
| 3.3.2 Recommended Operating Condition..... | 13 |
| 3.4 Signal Characteristics..... | 14 |
| 3.4.1 LCD Pixel Format | 14 |
| 3.4.2 LVDS Data Format..... | 14 |
| 3.4.3 Color versus Input Data..... | 15 |
| 3.4.4 LVDS Specification | 15 |
| 3.4.5 Input Timing Specification..... | 17 |
| 3.4.6 Input Timing Diagram | 18 |
| 3.5 Power ON/OFF Sequence | 19 |
| 4 Backlight Unit..... | 20 |
| 4.1 Block Diagram..... | 20 |
| 4.2 Interface Connection..... | 21 |
| 4.2.1 Connector Type..... | 21 |
| 4.2.2 Connector Pin Assignment | 21 |
| 4.3.1 Absolute Maximum Rating..... | 22 |
| 4.3.2 Recommended Operating Condition | 22 |
| 5 Reliability Test..... | 24 |
| 6 Shipping Label..... | 25 |
| 7 Mechanical Characteristics..... | 26 |
| 8 Packing Specification..... | 28 |
| 8.1 Packing Flow | 28 |
| 8.2 Pallet and shipment information | 29 |

Record of Revision

| Version | Date | Page | Old description | New Description | Remark | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|--|---|---|--|---------------|---------|--|--------------|-----------------|-------------------|---------------|----------|--|--------------|--------------------------------|---|----------------------|---------------|---------|--|--------------|------------------|-------------------|---------------|-----------------------|--|--------------|-----------------------|--|
| 0.0 | 2021/01/08 | - | | Frist Draft (Preliminary) | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 2021/01/31 | P26 | <p>6 Shipping Label</p> <p>The label is on the panel as shown below: (Example):</p> <p>Note 6-1: For RoHS products, we will add for identification.</p> <p>Note 6-2: For RoHS compatible products, we will add for identification.</p> <p>Note 6-3: For China RoHS compatible products, Qidu will add for identification.</p> <p>Note 6-4: The Green Mark will be presented only when the green documents have been ready by ADP internal Green Team.</p> | <p>6 Shipping Label</p> <p>The label is on the panel as shown below: (Example):</p> <p>(1) For RoHS Product, ADP will add for identification.</p> <p>(2) For RoHS compatible products, ADP will add for identification.</p> <p>(3) For China RoHS compatible products, ADP will add for identification.</p> <p>(4) Note: The green mark will be present only when the green documents have been ready by ADP internal green team. (Definition of green design follows the ADP green design checklist.)</p> | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.0 | 2021/01/31 | P27 | <p>7 Mechanical Characteristic</p> <p>Note 6-1: Avoid touching COP position when doing mechanical design. Note 6-2: The user hole depth of the side bar is different from the other side.</p> | <p>7 Mechanical Characteristic</p> | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1.1 | 2021/07/28 | P21 | <p>4.2 Interface Connection</p> <p>4.2.1 Connector Type</p> <p>4.2 Interface Connection- 4.2.1 Connector Type-</p> <table border="1"> <tr> <td>Backlight Connector-</td> <td>Manufacturer-</td> <td>ENTERY-</td> </tr> <tr> <td></td> <td>Part Number-</td> <td>3707K-506N-21R-</td> </tr> <tr> <td>Mating Connector-</td> <td>Manufacturer-</td> <td>Civilux-</td> </tr> <tr> <td></td> <td>Part Number-</td> <td>CII406SL000-NH (Locking type)-</td> </tr> </table> | Backlight Connector- | Manufacturer- | ENTERY- | | Part Number- | 3707K-506N-21R- | Mating Connector- | Manufacturer- | Civilux- | | Part Number- | CII406SL000-NH (Locking type)- | <p>4.2 Interface Connection</p> <p>4.2.1 Connector Type</p> <table border="1"> <tr> <td>Backlight Connector-</td> <td>Manufacturer-</td> <td>CVILUX-</td> </tr> <tr> <td></td> <td>Part Number-</td> <td>CII406M1HRN-NH1-</td> </tr> <tr> <td>Mating Connector-</td> <td>Manufacturer-</td> <td>CVILUX or Compatible-</td> </tr> <tr> <td></td> <td>Part Number-</td> <td>CII406SL000-NH (Lock)</td> </tr> </table> | Backlight Connector- | Manufacturer- | CVILUX- | | Part Number- | CII406M1HRN-NH1- | Mating Connector- | Manufacturer- | CVILUX or Compatible- | | Part Number- | CII406SL000-NH (Lock) | |
| Backlight Connector- | Manufacturer- | ENTERY- | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Part Number- | 3707K-506N-21R- | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mating Connector- | Manufacturer- | Civilux- | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Part Number- | CII406SL000-NH (Locking type)- | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Backlight Connector- | Manufacturer- | CVILUX- | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Part Number- | CII406M1HRN-NH1- | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Mating Connector- | Manufacturer- | CVILUX or Compatible- | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Part Number- | CII406SL000-NH (Lock) | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| P26~P27 | <p>7 Mechanical Characteristics</p> | <p>7 Mechanical Characteristics (Add ADP logo)</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

I Handling Precautions

- 1) Since polarizer is easily damaged, do not touch or press the surface of polarizer with hand.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) Do not press the reflector sheet at the back of the module to any directions.
- 9) In case a TFT-LCD Module has to be put back into the packing container slot after once it was taken out from the container, do not press the center of the LED lightbar edge. Otherwise the TFT-LCD Module may be damaged.
- 10) Insert or pull out the interface connector, be sure not to rotate nor tilt it of the TFT-LCD Module.
- 11) Do not twist nor bend the TFT -LCD Module even momentary. It should be taken into consideration that no bending/twisting forces are applied to the TFT-LCD Module from outside. Otherwise the TFT-LCD Module may be damaged.
- 12) Please avoid touching COF position while you are doing mechanical design.
- 13) When storing modules as spares for a long time, the following precaution is necessary: Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- 14) Do not apply the same pattern for a long time, it will enhance relevant defect.
- 15) When this reverse-type model(PCBA on bottom side) is used as forward-type model(PCBA on top side) , ADP Display Plus can not guarantee any defects of LCM .

2 General Description


This specification applies to the 23.8 inch- wide Color a-Si TFT-LCD Module P238HVN01.0. The display supports the FHD - 1920(H) x 1080(V) screen format and 16.7M colors (8-bit RGB data input). The input interface is Dual channel LVDS and this module doesn't contain an driver board for backlight.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25°C condition:

| ITEMS | Unit | SPECIFICATIONS |
|--|----------------------|---|
| Screen Diagonal | [mm] | 23.8" |
| Active Area | [mm] | 527.04(H) x 296.46(V) |
| Pixels H x V | - | 1920 x 1080 |
| Pixel Pitch | [um] | 274.5(per one triad)×274.5 |
| Pixel Arrangement | - | R.G.B. Vertical Stripe. Source board at bottom Note 2-1 |
| Display Mode | - | VA Mode (Vertical Alignment), Normally Black |
| White Luminance (Center) | [cd/m ²] | 250 (Typ.) |
| Contrast Ratio | - | 3000(Typ.) |
| Response Time | [msec] | 16ms (Typ., on/off) |
| Power Consumption (LCD Module + Backlight unit) | [Watt] | 12.17(Typ.) LCD module:PDD (Typ.)=3.2@White pattern, Fv=60Hz Backlight unit:P _{BLU} (Typ.)=8.97 @Is=50mA |
| Weight | [Grams] | 2280 (Typ.) |
| Outline Dimension | [mm] | 543.0(H) x 317.4(V) x 11.2(D) (Typ.) |
| Electrical Interface | - | Dual channel LVDS,8-bits RGB data input |
| Support Color | - | 16.7M colors |
| Surface Treatment | - | SAG 40%, 3H |
| Temperature Range Operating Storage (Shipping) | [°C] [°C] | 0 to +50 -20 to +60 |
| RoHS Compliance | - | RoHS Compliance |
| TCO Compliance | - | TCO 8.0 Compliance |

Note 2-1: The following shows the figure of pixel arrangement

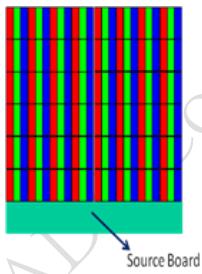


2.2 Absolute Maximum Rating of Environment

Permanent damage may occur if exceeding the following maximum rating.

| Symbol | Description | Value | | Unit | Note |
|--------|--------------------------------------|-------|------|---------|--|
| | | Min. | Max. | | |
| TOP | Operating Temperature | 0 | +50 | [°C] | Note 2-2 |
| TGS | Glass surface temperature(operation) | 0 | +65 | [°C] | Note 2-2 <i>Function judged only</i> |
| HOP | A _{OP} | 5 | 90 | [%RH] | Note 2-2 |
| TST | A _{ST} | -20 | +60 | [°C] | |
| HTS | | 5 | 90 | [%RH] | |

Note 2-2: Temperature and relative humidity range is shown in the figure .

1. 90% RH Max (Ta \leq 39°C)
2. Wet-bulb temperature should be 39°C Max. (Twb \leq 39°C)
3. No condensation

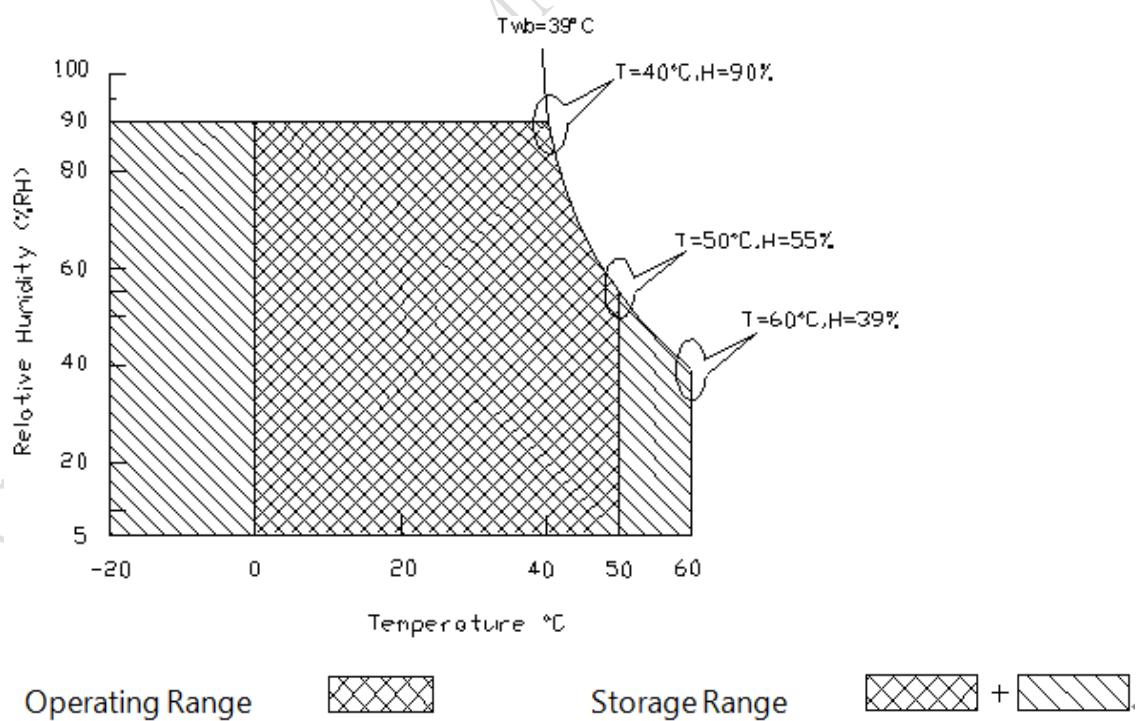

2.3 Optical Characteristics

The optical characteristics are measured on the following test condition.


Test Condition:

1. Equipment setup: Please refer to **Note 2-3**.
2. Panel Lighting time: 30 minutes
3. VDD=5.0V, Fv=60Hz, Is=50mA, Ta=25°C
4. L/B must be in the bottom side at normal and MNT aging state

| Symbol | Description | | Min. | Typ. | Max. | Unit | Remark |
|------------|-------------------------------------|------------------|-------|-------|-------|----------------------|-------------------------------|
| L_w | White Luminance (Center of screen) | | 200 | 250 | - | [cd/m ²] | Note 2-3 By SR-3 |
| L_{uni} | Luminance Uniformity (9 points) | | 75 | 80 | - | [%] | Note 2-4 By SR-3 |
| CR | Contrast Ratio (Center of screen) | | 1800 | 3000 | - | - | Note 2-5 By SR-3 |
| θ_R | Horizontal Viewing Angle (CR=10) | Right | 75 | 89 | - | [degree] | Note 2-6 By SR-3 |
| θ_L | | Left | 75 | 89 | - | | |
| Φ_H | Vertical Viewing Angle (CR=10) | Up | 75 | 89 | - | | |
| Φ_L | | Down | 75 | 89 | - | | |
| θ_R | Horizontal Viewing Angle (CR=5) | Right | 75 | 89 | - | [msec] | Note 2-7 By TRD-100 |
| θ_L | | Left | 75 | 89 | - | | |
| Φ_H | Vertical Viewing Angle (CR=5) | Up | 75 | 89 | - | | |
| Φ_L | | Down | 75 | 89 | - | | |
| T_R | Response Time | Rising Time | - | 10 | 20 | [msec] | Note 2-7 By TRD-100 |
| T_F | | Falling Time | - | 6 | 12 | | |
| - | | Rising + Falling | - | 16 | 32 | | |
| R_x | Color Coordinates (CIE 1931) | Red x | 0.623 | 0.653 | 0.683 | - | Note 2-3 By SR-3 |
| R_y | | Red y | 0.305 | 0.335 | 0.365 | | |
| G_x | | Green x | 0.292 | 0.322 | 0.352 | | |
| G_y | | Green y | 0.587 | 0.617 | 0.647 | | |
| B_x | | Blue x | 0.122 | 0.152 | 0.182 | | |
| B_y | | Blue y | 0.050 | 0.080 | 0.110 | | |
| W_x | | White x | 0.283 | 0.313 | 0.343 | | |
| W_y | | White y | 0.299 | 0.329 | 0.359 | | |
| NTSC ratio | | | | 72 | | [%] | |

Note 2-3: Equipment setup :

The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring (at surface 35°C). In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

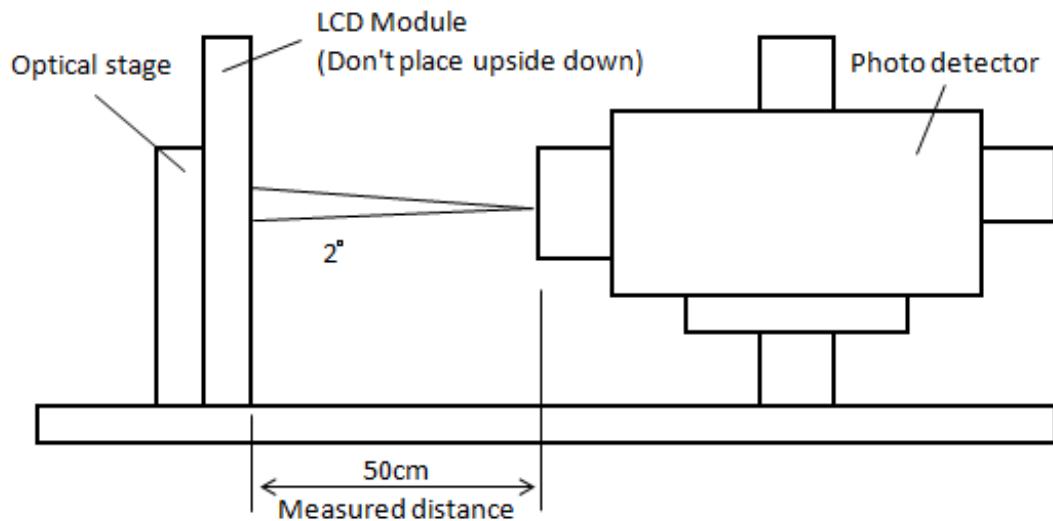


Note 2-4: Luminance Uniformity Measurement

Definition:

$$\text{Luminance Uniformity} = \frac{\text{Minimum Luminance of 9 Points (P1 ~ P9)}}{\text{Maximum Luminance of 9 Points (P1 ~ P9)}}$$

a. Test pattern: White Pattern

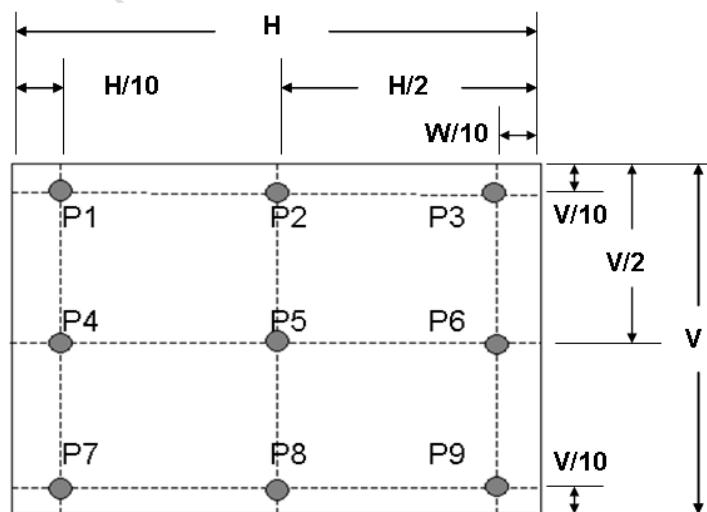

Note 2-5: Contrast Ratio Measurement

Definition:

$$\text{Contrast Ratio} = \frac{\text{Luminance of White pattern}}{\text{Luminance of Black pattern}}$$


a. Measured position: Center of screen (P5) & perpendicular to the screen ($\theta=\Phi=0^\circ$)

Note 2-6: Viewing angle measurement

Definition: The angle at which the contrast ratio is greater than 10 & 5 .

a. Horizontal view angle: Divide to left & right (θ_L & θ_R)

Vertical view angle: Divide to up & down (ϕ_H & ϕ_L)

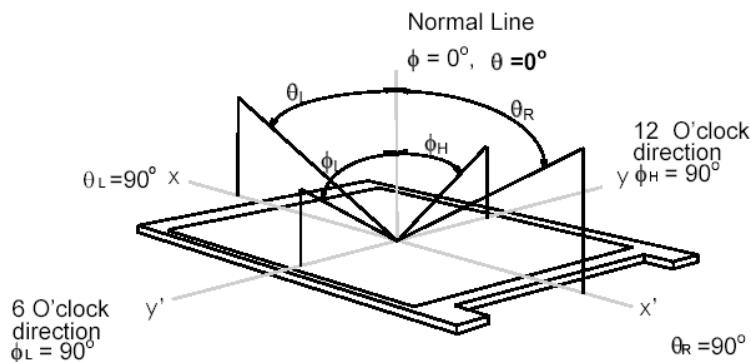


Note 2-7: Response

measurement

time

The output signals of photo detector are measured when the input signals are changed from "Gray level A" to "Gray level B" (falling time, TF), and from "Gray level B" to "Gray level A" (rising time, TR), respectively. The response time is interval between the 10% and 90% of optical response.

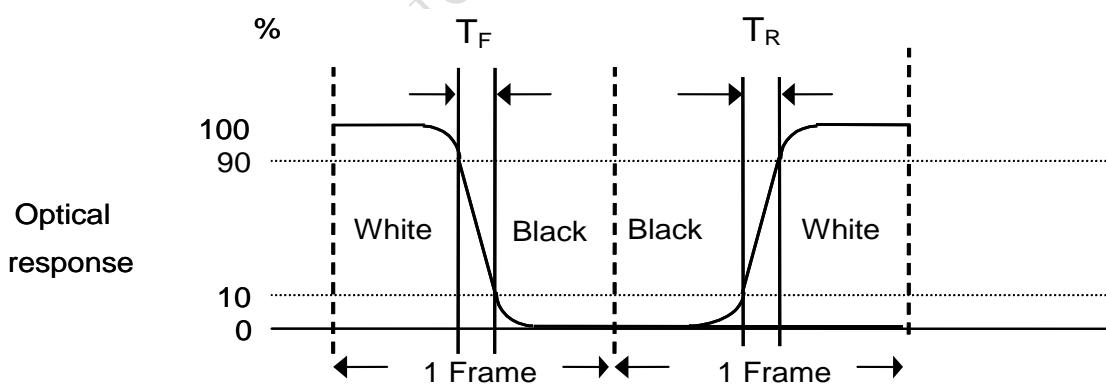


2.4 Mechanical Characteristics

| Symbol | Description | Min. | Max. | Unit | Remark |
|-----------------|----------------------|------|------|-------|-----------------|
| P _{bc} | Backside Compression | 2.5 | - | [Kgf] | Note 2-8 |

Note 2-8: Test Method:

The point is at a distance from right-downside 25mm x 25mm defined as the Start Point of Measure Points, and the point is at a distance 25mm from left-side & around 10mm from PCB defined as the End Point.

Align 50mm x 50mm block from Start Point on the Bezel Back, and the corners of each block are Measure Points.

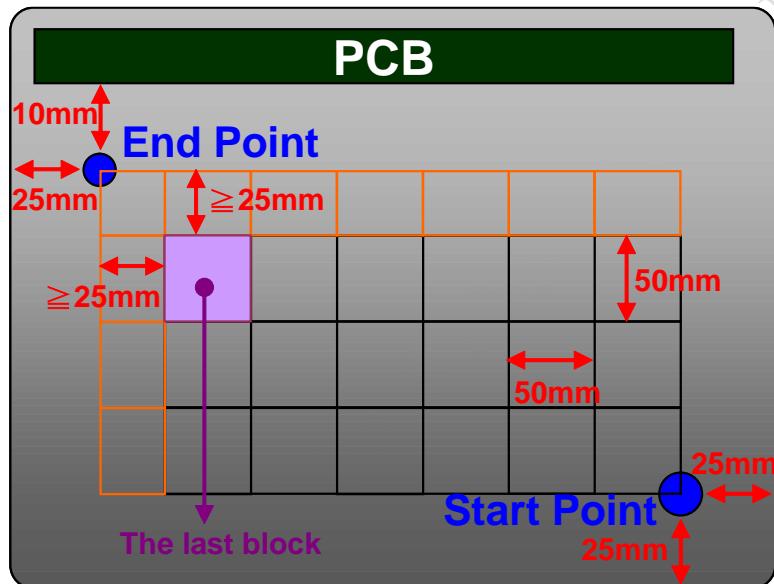


If the distance from the last block to each side of the End Point $\geq 25\text{mm}$, add other blocks to make sure that most area of Bezel Back can be measured.

Note 2-9: Evaluation test and mass production inspection shall be applied with LED current I_s @ HDR off condition if there is not specified condition.

3 TFT-LCD Module

3.1 Block Diagram

The following shows the block diagram of the 23.8 inch Color TFT-LCD Module

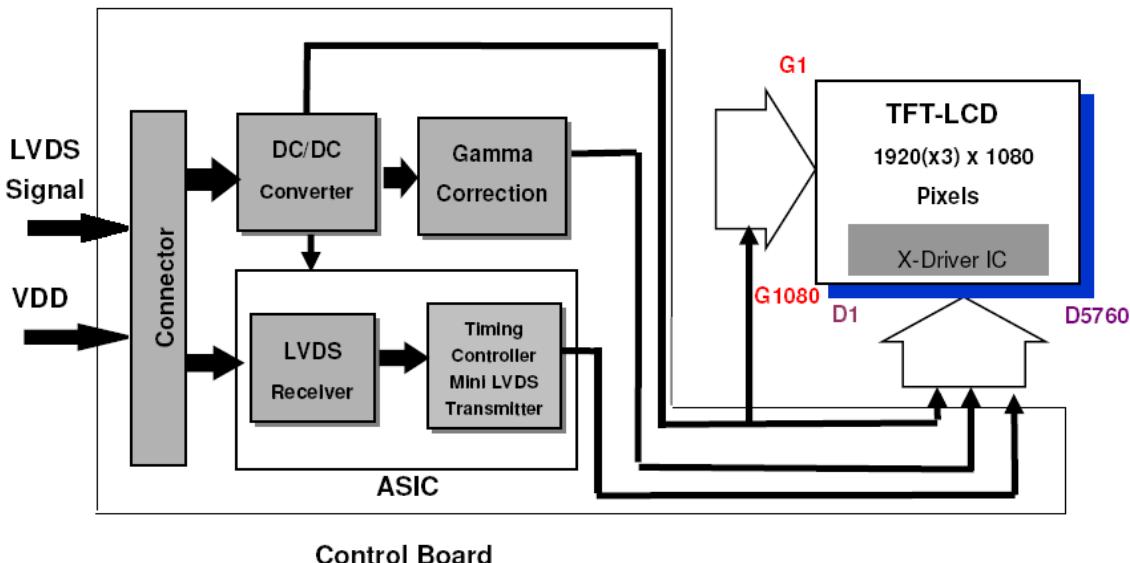

3.2 Interface Connection


3.2.1 Connector Type

| | | | |
|-------------------|--------------|-----------------------|---------------|
| TFT-LCD Connector | Manufacturer | P-TWO | STM |
| | Part Number | I87034-3009 | MSBKT240P30HB |
| Mating Connector | Manufacturer | JAE or Compatible | |
| | Part Number | FI-X30HL(Locked Type) | |

3.2.2 Connector Pin Assignment

| PIN # | Symbol | Description | Remark |
|-------|---------|--|--------|
| 1 | RxO0- | Negative LVDS differential data input (Odd data) | |
| 2 | RxO0+ | Positive LVDS differential data input (Odd data) | |
| 3 | RxO1- | Negative LVDS differential data input (Odd data) | |
| 4 | RxO1+ | Positive LVDS differential data input (Odd data) | |
| 5 | RxO2- | Negative LVDS differential data input (Odd data) | |
| 6 | RxO2+ | Positive LVDS differential data input (Odd data) | |
| 7 | GND | Ground | |
| 8 | RxOCLK- | Negative LVDS differential clock input (Odd clock) | |
| 9 | RxOCLK+ | Positive LVDS differential clock input (Odd clock) | |
| 10 | RxO3- | Negative LVDS differential data input (Odd data) | |
| 11 | RxO3+ | Positive LVDS differential data input (Odd data) | |
| 12 | RxE0- | Negative LVDS differential data input (Even data) | |

| | | | |
|----|---------|--|--|
| 13 | RxE0+ | Positive LVDS differential data input (Even data) | |
| 14 | GND | Ground | |
| 15 | RxE1- | Negative LVDS differential data input (Even data) | |
| 16 | RxE1+ | Positive LVDS differential data input (Even data) | |
| 17 | GND | Ground | |
| 18 | RxE2- | Negative LVDS differential data input (Even data) | |
| 19 | RxE2+ | Positive LVDS differential data input (Even data) | |
| 20 | RxECLK- | Negative LVDS differential clock input (Even clock) | |
| 21 | RxECLK+ | Positive LVDS differential clock input (Even clock) | |
| 22 | RxE3- | Negative LVDS differential data input (Even data) | |
| 23 | RxE3+ | Positive LVDS differential data input (Even data) | |
| 24 | GND | Must Connect to GND | |
| 25 | NC | No connection (for internal test only. Do not connect) | |
| 26 | NC | No connection (for internal test only. Do not connect) | |
| 27 | NC | No connection (for internal test only. Do not connect) | |
| 28 | VDD | Power Supply Input Voltage | |
| 29 | VDD | Power Supply Input Voltage | |
| 30 | VDD | Power Supply Input Voltage | |

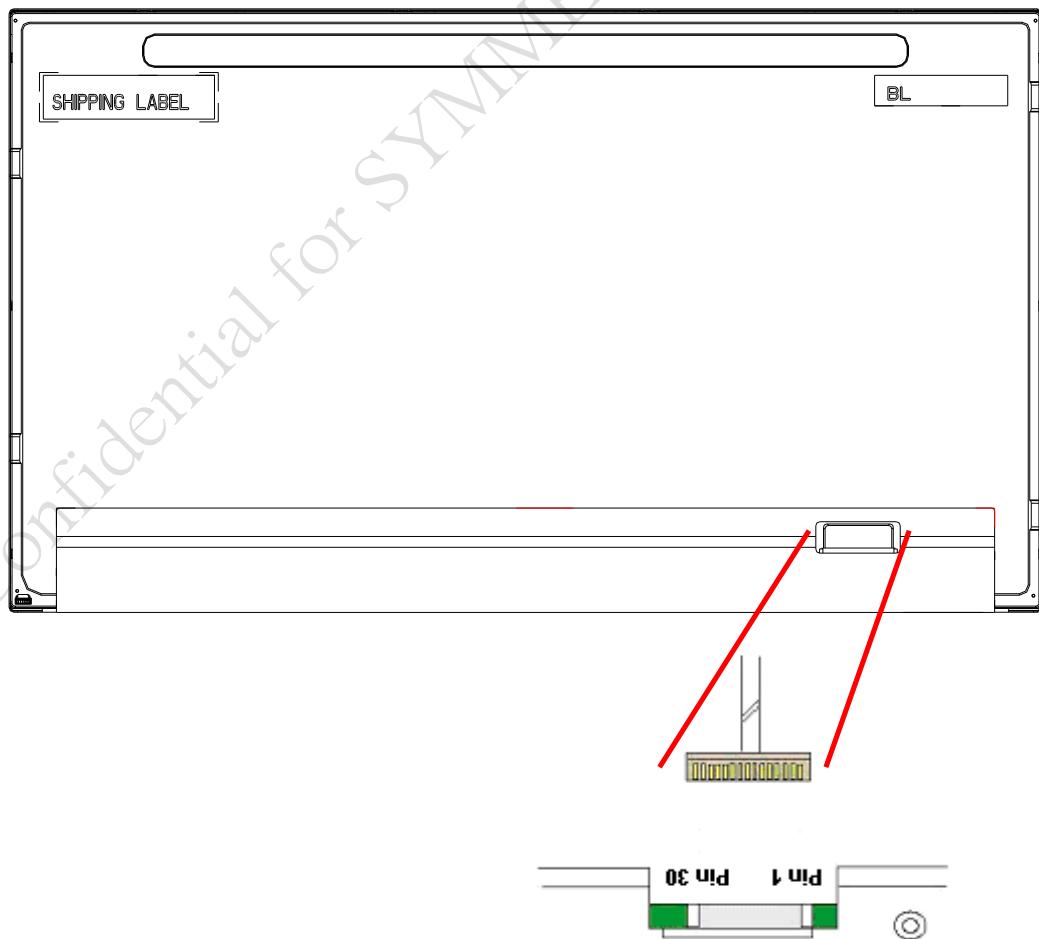

3.3 Electrical Characteristics

3.3.1 Absolute Maximum Rating

Permanent damage may occur if exceeding the following maximum rating.


| Symbol | Description | Min | Max | Unit | Remark |
|--------|----------------------------|---------|-----|--------|---------|
| VDD | Power Supply Input Voltage | GND-0.3 | 6.0 | [Volt] | Ta=25°C |

3.3.2 Recommended Operating Condition

| Symbol | Description | Min | Typ | Max | Unit | Remark |
|--------|----------------------------------|-----|------|------|--------|--|
| VDD | Power supply Input voltage | 4.5 | 5.0 | 5.5 | [Volt] | |
| IDD | Power supply Input Current (RMS) | - | 0.64 | 0.78 | [A] | VDD= 5.0V, All white Pattern , Fv=60Hz |
| | | - | 0.74 | 0.9 | [A] | VDD= 5.0V, All white Pattern , Fv=75Hz |
| PDD | VDD Power Consumption | - | 3.2 | 3.9 | [Watt] | VDD= 5.0V, All white Pattern , Fv=60Hz |
| | | - | 3.7 | 4.5 | [Watt] | VDD= 5.0V, All white Pattern , Fv=75Hz |
| IRush | Inrush Current | - | - | 3.0 | [A] | Note 3-1 |
| VDDRp | Allowable VDD Ripple Voltage | - | - | 500 | [mV] | VDD= 5.0V, All white Pattern , Fv=75Hz |

Note 3-1: Inrush Current measurement:


Test circuit:

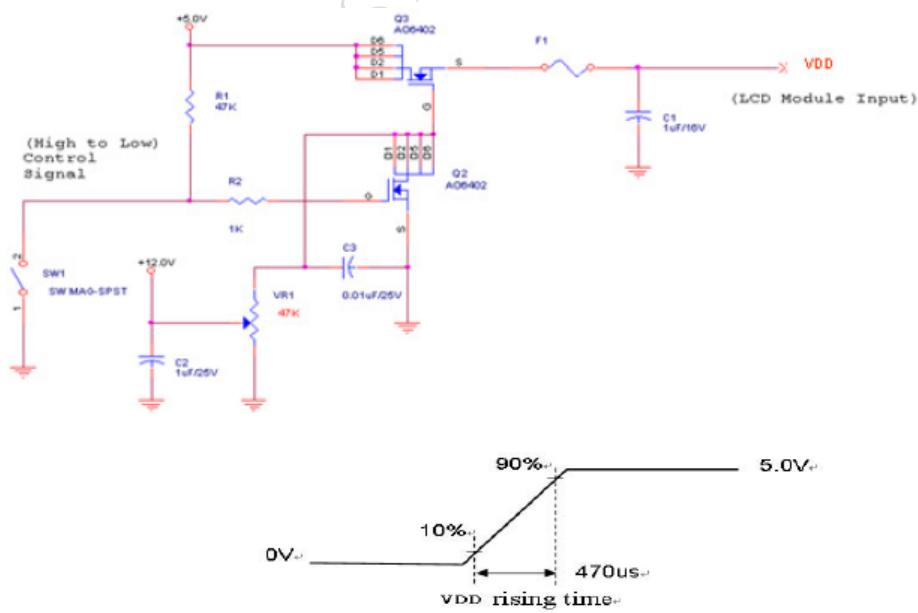


The duration of VDD rising time: 470μs.

3.4 Signal Characteristics

3.4.1 LCD Pixel Format

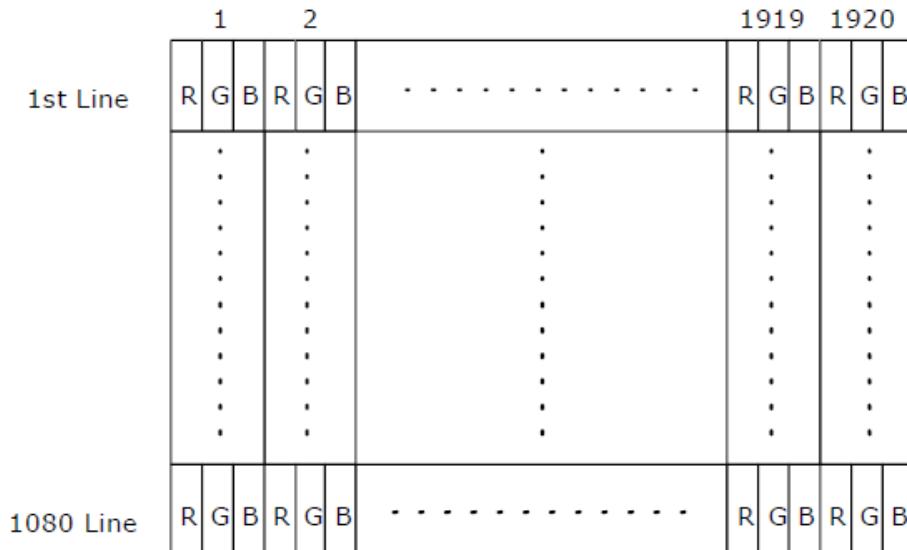

3.4.2 LVDS Data Format

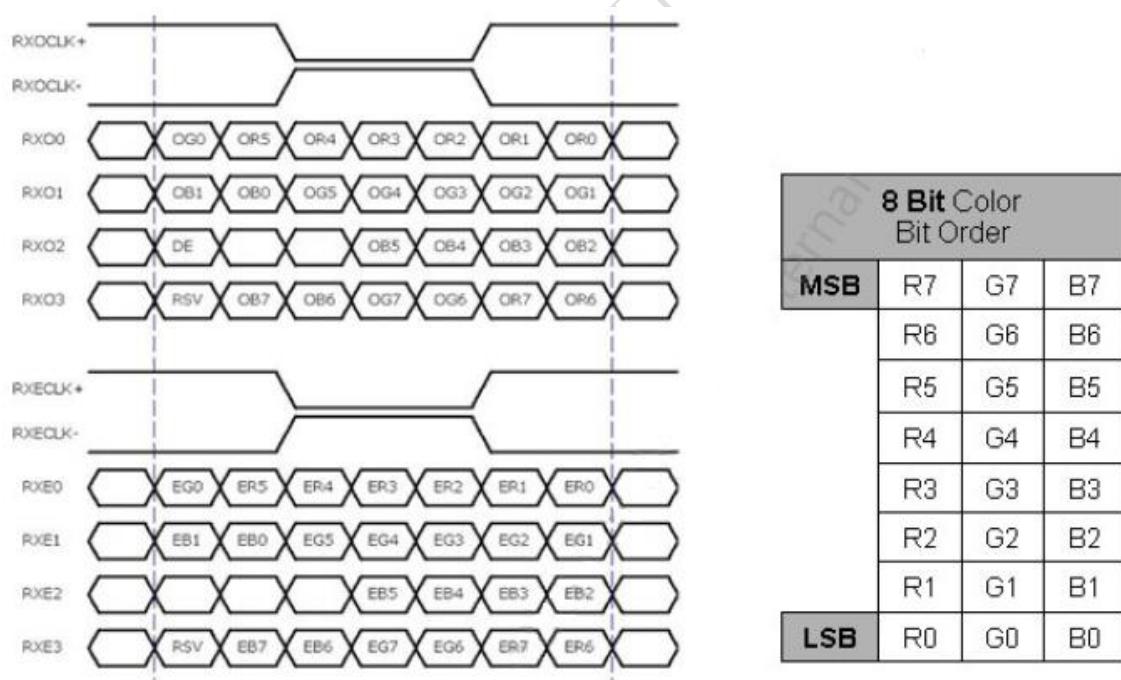

Note 3-2:

- O = “Odd Pixel Data” E = “Even Pixel Data”
- Refer to 3.4.1 LCD pixel format, the 1st data is 1 (Odd pixel Data), the 2nd data is 2 (Even Pixel Data) and the last data is 1920 (Even Pixel Data)

3.4.3 Color versus Input Data

The following table is for color versus input data (8bit). The higher the gray level, the brighter the color

| Color | Gray Level | Color Input Data | | | | | | | | | | | | | | | | | | | | | | | | Remark | |
|----------|------------|------------------------------|----|----|----|----|----|----|----|--------------------------------|----|----|----|----|----|----|----|-------------------------------|----|----|----|----|----|----|----|--------|--|
| | | RED data (MSB:R7, LSB:R0) | | | | | | | | GREEN data (MSB:G7, LSB:G0) | | | | | | | | BLUE data (MSB:B7, LSB:B0) | | | | | | | | | |
| | | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 | | |
| Black | - | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| White | - | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |
| Gray 127 | - | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |
| Red | L0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Black | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | L255 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Green | L0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Black | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | L255 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | | |
| Blue | L0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | Black | |
| | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | : | | |
| | L255 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | |


3.4.4 LVDS Specification

a. DC Characteristics

| Symbol | Description | Min | Typ | Max | Units | Condition |
|------------|--|------|------|------|-------|-------------------------|
| V_{TH} | LVDS Differential Input High Threshold | - | - | +100 | [mV] | $V_{CM} = 1.2V$ |
| V_{TL} | LVDS Differential Input Low Threshold | -100 | - | - | [mV] | $V_{CM} = 1.2V$ |
| $ V_{ID} $ | LVDS Differential Input Voltage | 100 | - | 600 | [mV] | |
| V_{CM} | LVDS Common Mode Voltage | +1.0 | +1.2 | +1.5 | [V] | $V_{TH}-V_{TL} = 200mV$ |


LVDS Signal Waveform:

Use RxOCLK-& RxOCLK+ as example

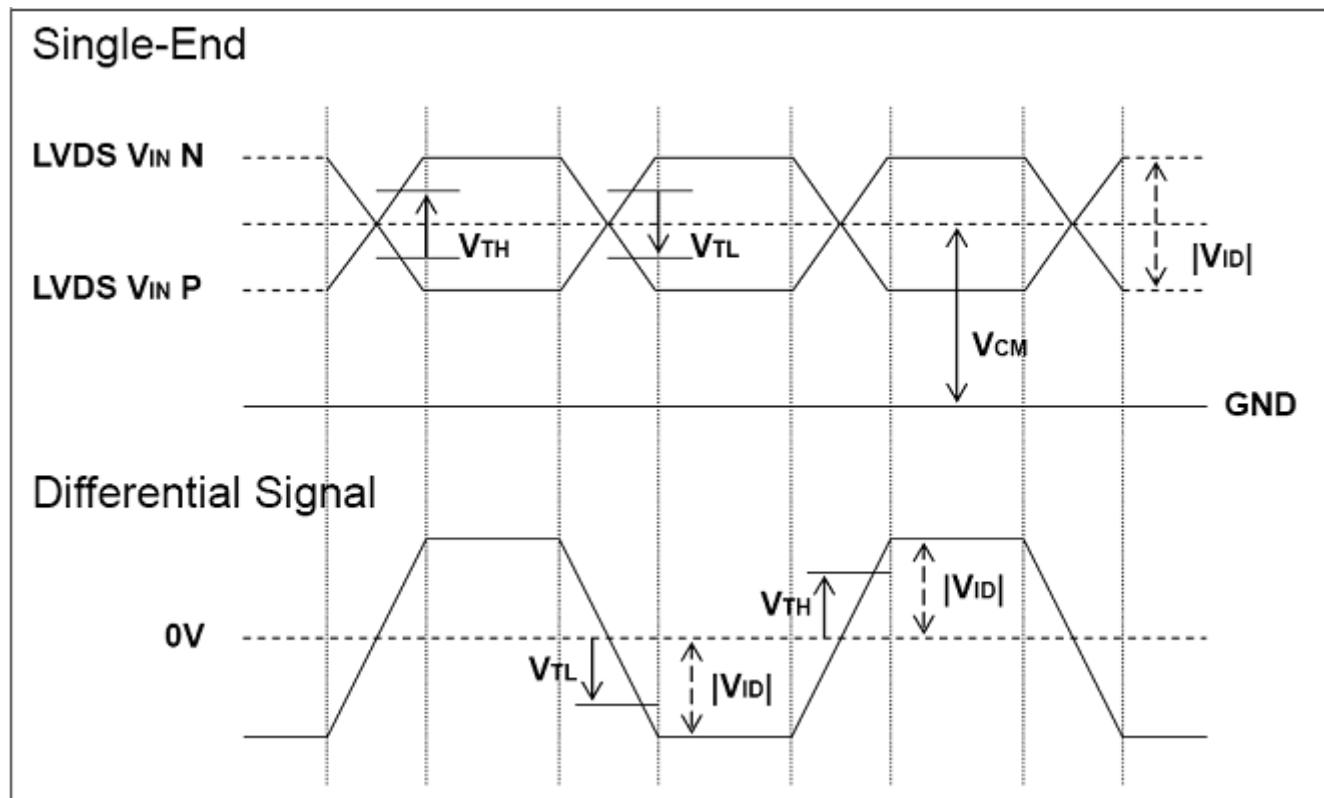

b. AC Characteristics:

| Symbol | Description | Min | Max | Unit | Remark |
|-----------|--|-----|---------|------|--------|
| F_{DEV} | Maximum deviation of input clock frequency during Spread Spectrum | - | ± 3 | % | |
| F_{MOD} | Maximum modulation frequency of input clock during Spread Spectrum | - | 200 | KHz | |

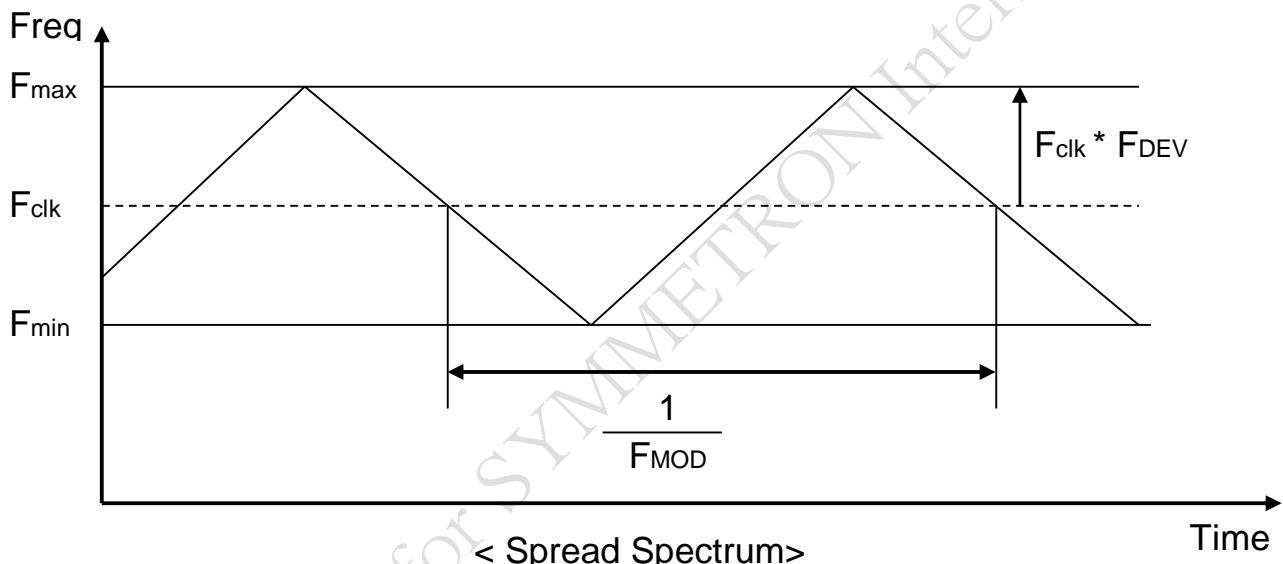

F_{clk} : LVDS Clock Frequency

3.4.5 Input Timing Specification

It only support DE mode, and the input timing are shown as the following table

| Symbol | Description | | Min. | Typ. | Max. | Unit | Remark |
|---------------|--------------------|-----------|------|------|------|------|--------|
| T_v | Vertical Section | Period | 1094 | 1130 | 1836 | Th | |
| $T_{disp}(v)$ | | Active | 1080 | 1080 | 1080 | Th | |
| $T_{blk}(v)$ | | Blanking | 14 | 50 | 756 | Th | |
| F_v | | Frequency | 49 | 60 | 76 | Hz | |
| Th | Horizontal Section | Period | 1000 | 1050 | 1678 | Tclk | |
| $T_{disp}(h)$ | | Active | 960 | 960 | 960 | Tclk | |
| $T_{blk}(h)$ | | Blanking | 40 | 90 | 718 | Tclk | |

| | | | | | | | |
|------|------------|-----------|------|------|------|-----|-----------------|
| Fh | | Frequency | 53.7 | 67.8 | 90 | KHz | Note 3-3 |
| Tclk | LVDS Clock | Period | 11.2 | 14.0 | 18.6 | ns | 1/Fclk |
| Fclk | | Frequency | 53.7 | 71.2 | 90.0 | MHz | Note 3-4 |


Note 3-3: The equation is listed as following. Please don't exceed the above recommended value.

$$\begin{aligned} Fh (\text{Min.}) &= Fclk (\text{Min.}) / Th (\text{Min.}); \\ Fh (\text{Typ.}) &= Fclk (\text{Typ.}) / Th (\text{Typ.}); \\ Fh (\text{Max.}) &= Fclk (\text{Max.}) / Th (\text{Min.}); \end{aligned}$$

Note 3-4: The equation is listed as following. Please don't exceed the above recommended value.


$$\begin{aligned} Fclk (\text{Min.}) &= Fv (\text{Min.}) \times Th (\text{Min.}) \times Tv (\text{Min.}); \\ Fclk (\text{Typ.}) &= Fv (\text{Typ.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.}); \\ Fclk (\text{Max.}) &= Fv (\text{Max.}) \times Th (\text{Typ.}) \times Tv (\text{Typ.}); \end{aligned}$$

3.4.6 Input Timing Diagram

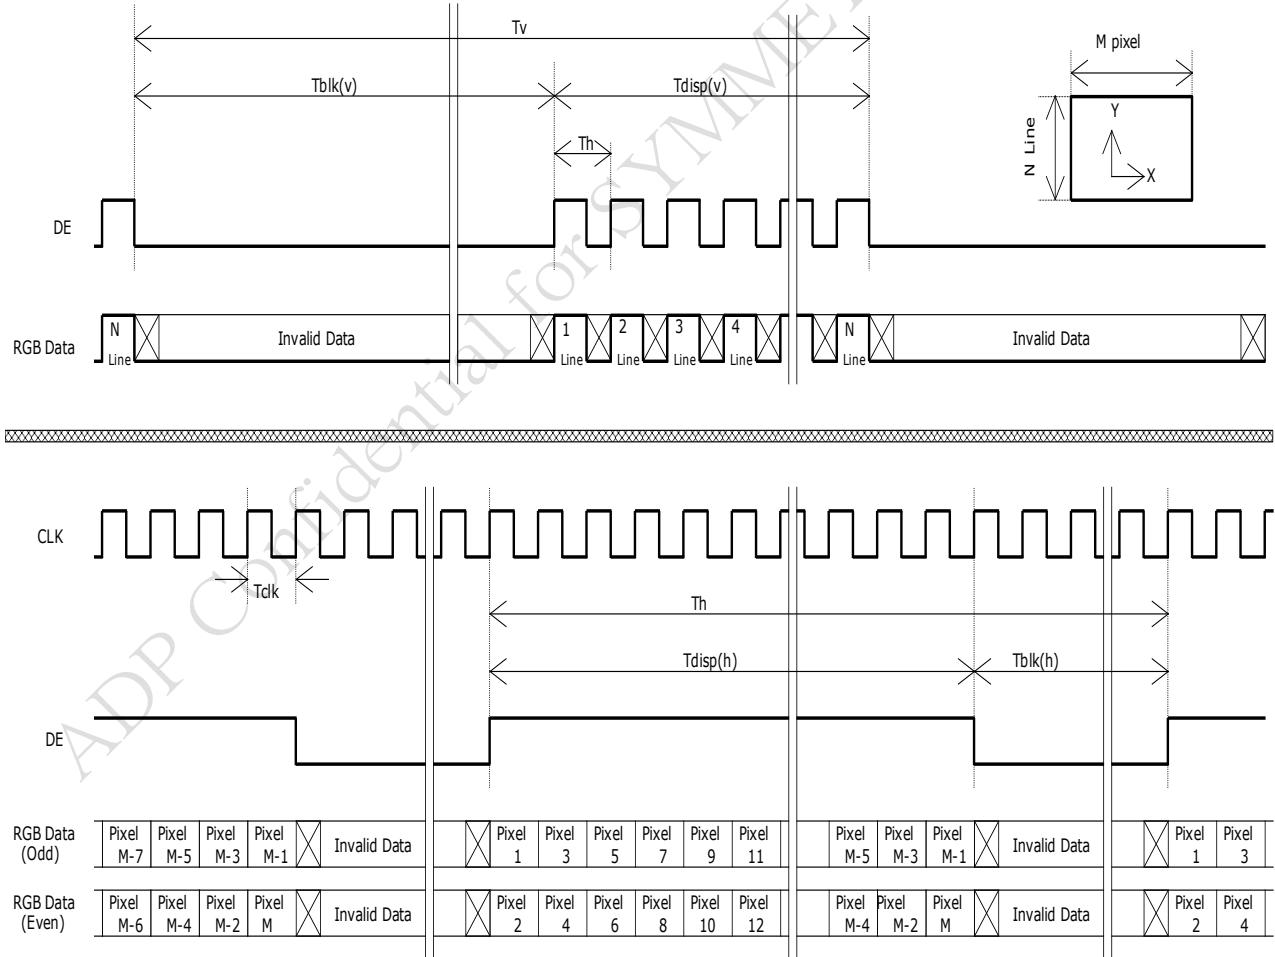

3.5 Power ON/OFF Sequence

VDD power ,LVDS signal and backlight on/off sequence are as following. LVDS signals from any system shall be Hi-Z state when VDD is off.

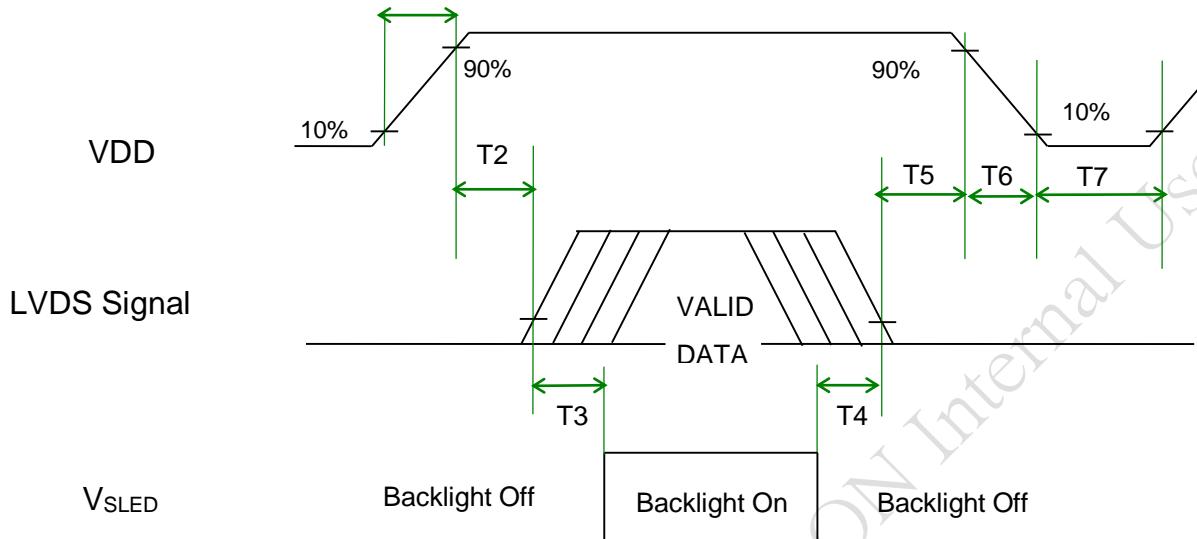

Power Sequence Timing

| Symbol | Value | | | Unit | Remark |
|--------|-------|------|------|------|------------------------------------|
| | Min. | Typ. | Max. | | |
| T1 | 0.5 | - | 10 | [ms] | |
| T2 | 0 | - | 50 | [ms] | |
| T3 | 500 | - | - | [ms] | |
| T4 | 100 | - | - | [ms] | |
| T5 | 0 | | 50 | [ms] | Note 3-6 Note 3-7 |
| T6 | 0 | | 200 | [ms] | Note 3-7 Note 3-8 |
| T7 | 1000 | - | - | [ms] | |

Note 3-6 : Recommend setting T5 = 0ms to avoid electronic noise when VDD is off.


Note 3-7 : During T5 period , please keep the level of input LVDS signals with Hi-Z state.

Note 3-8 : Voltage of VDO must decay smoothly after power-off. (customer system decide this value)

4 Backlight Unit

4.1 Block Diagram

The following shows the block diagram of the 23.8 inch Backlight Unit. And it includes 64 pcs LED in the LED light bar. (4 strings and 16 pcs LED of one string).

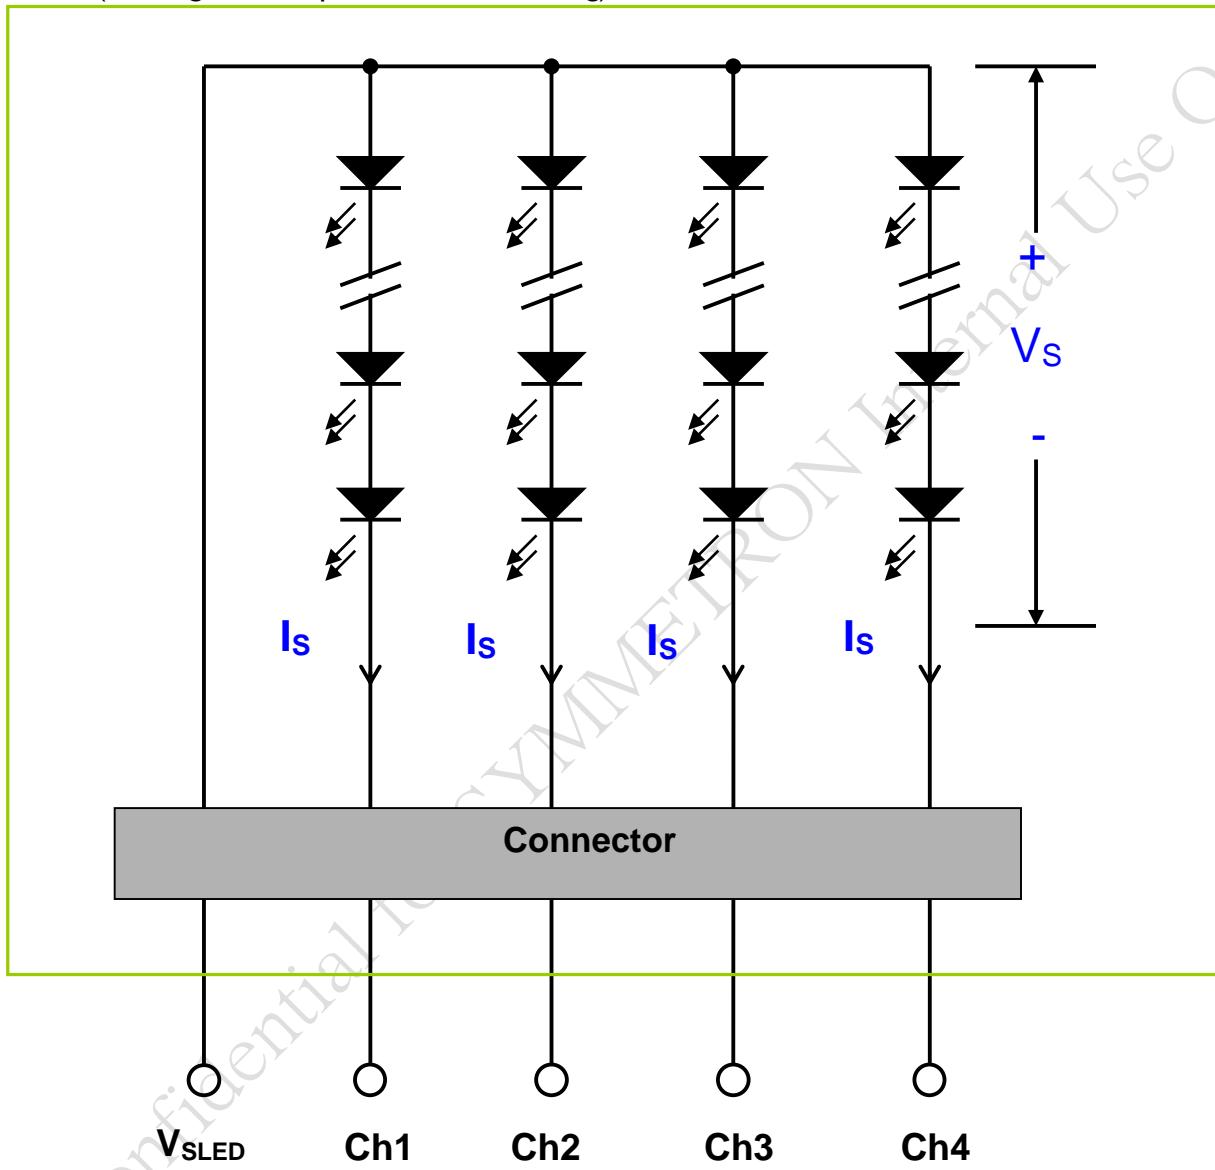


4.2 Interface Connection

4.2.1 Connector Type

| | | |
|----------------------------|---------------------|------------------------------|
| Backlight Connector | Manufacturer | CVILUX |
| | Part Number | CI1406M1HRN-NH1 |
| Mating Connector | Manufacturer | CVILUX or Compatible |
| | Part Number | CI1406SL000-NH (Lock) |

4.2.2 Connector Pin Assignment

| Pin# | Symbol | Description | Remark |
|-------------|-------------------|---|---------------|
| 1 | Ch1 | LED Current Feedback Terminal (Channel 1) | |
| 2 | Ch2 | LED Current Feedback Terminal (Channel 2) | |
| 3 | V _{SLED} | LED Power Supply Voltage Input Terminal | |
| 4 | V _{SLED} | LED Power Supply Voltage Input Terminal | |
| 5 | Ch3 | LED Current Feedback Terminal (Channel 3) | |
| 6 | Ch4 | LED Current Feedback Terminal (Channel 4) | |

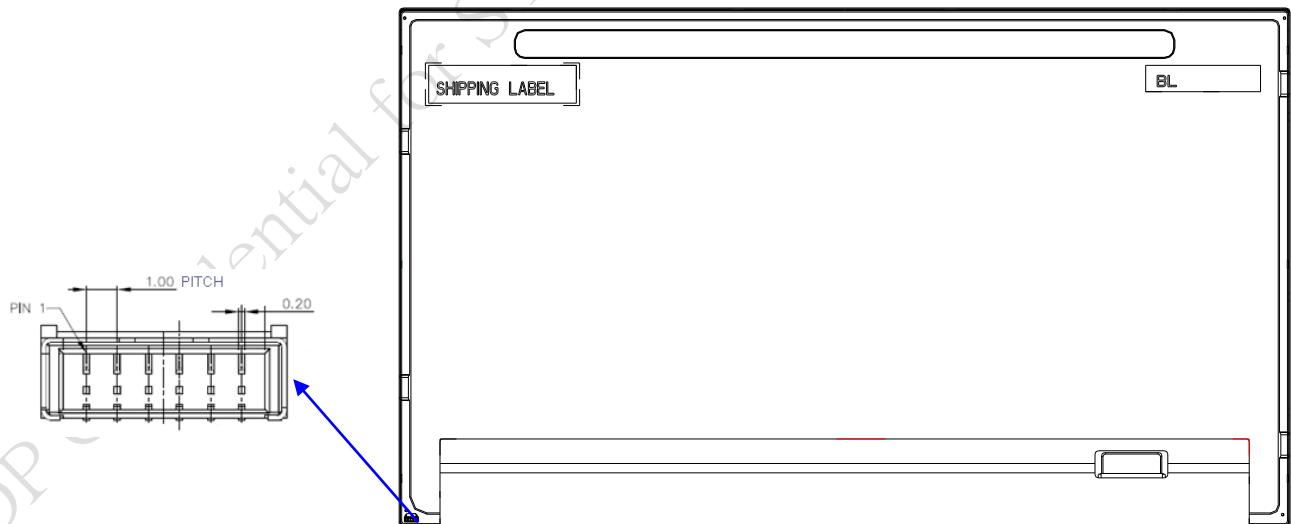

4.3 Electrical Characteristics

4.3.1 Absolute Maximum Rating

Permanent damage may occur if exceeding the following maximum rating.

(Ta=25°C)

| Symbol | Description | Min | Max | Unit | Remark |
|----------------|--------------------|-----|-----|------|-----------------|
| I _s | LED String Current | 0 | 180 | [mA] | 100% duty ratio |


4.3.2 Recommended Operating Condition

(Ta=25°C)

| Symbol | Description | Min. | Typ. | Max. | Unit | Remark |
|-------------------------------|---|--------|-------------------|-------|--------|---|
| I _s | LED String Current | - | 50 | 55 | [mA] | 100% duty ratio of LED chip, Note 4-6 |
| V _s | LED String Voltage | 38.87 | 44.86 | 47.85 | [Volt] | I _s =50mA @ 100% duty ratio; Note 4-1, Note 4-5, Note 4-7 |
| ΔV _s | Maximum Vs Voltage Deviation of light bar | - | - | 3.2 | [Volt] | I _s =50mA @ 100% duty ratio; Note 4-2 |
| P _{BLU} | LED Light Bar Power Consumption | - | 8.97 | 9.57 | [Watt] | Note 4-3 |
| L _T _{LED} | LED Life Time | 30,000 | - | - | [Hour] | Note 4-4 |
| OVP | Over Voltage Protection in system board | 110% | V _{smax} | - | - | [Volt] Note 4-5 |

Note 4-1: $V_s (\text{Typ.}) = V_F (\text{Typ.}) \times \text{LED No. (one string)}$;

- a. V_F : LED chip forward voltage, $V_F (\text{Min.})=2.43V$, $V_F (\text{Typ.})=2.8V$, $V_F (\text{Max.})=2.99V$
- b. The same equation to calculate $V_s (\text{Min.})$ & $V_s (\text{Max.})$ for respective $V_F (\text{Min.})$ & $V_F (\text{Max.})$;

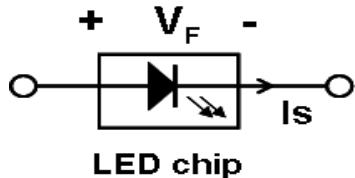

Note 4-2: $\Delta V_s (\text{Max.}) = \Delta V_F \times \text{LED No. (one string)}$;

- a. ΔV_F : LED chip forward voltage deviation; (0.2V , each Bin of LED V_F)

Note 4-3: $P_{BLU} (\text{Typ.}) = V_s (\text{Typ.}) \times I_s (\text{Typ.}) \times 4$; (4 is total String No. of LED Light bar)

$$P_{BLU} (\text{Max.}) = V_s (\text{Max.}) \times I_s (\text{Typ.}) \times 4 ;$$

Note 4-4: Definition of life time:

- a. Brightness of LED becomes to 50% of its original value
- b. Test condition: $I_s = 50\text{mA}$ and 25°C (Room Temperature)

Note 4-5: Recommendation for LED driver power design:

Due to there are electrical property deviation in LED & monitor set system component after long time operation. It's strongly recommend the design value of LED driver board OVP (over voltage protection) should be 10% higher than max. value of LED string voltage (V_s) at least.

Note 4-6: Recommend “Analog Dimming” method for backlight brightness control for Wavy Noise Free. Otherwise, recommend that Dimming Control Signal (PWM Signal) should be synchronized with Frame Frequency.

Note 4-7: Ensure that the LED light bar is not subjected either forward or reverse voltage while monitor set is on standby mode or not in use.

5 Reliability Test

Reliability test items are listed as following table. (*Bare Panel only*)

| Items | Condition | Remark |
|-----------------------------------|---|-----------------|
| Temperature Humidity Bias (THB) | Ta= 50°C, 80%RH, 300hours | |
| High Temperature Operation (HTO) | Ta= 50°C, 50%RH, 300hours | |
| Low Temperature Operation (LTO) | Ta= 0°C, 300hours | |
| High Temperature Storage (HTS) | Ta= 60°C, 300hours | |
| Low Temperature Storage (LTS) | Ta= -20°C, 300hours | |
| Vibration Test (Non-operation) | Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Sweep: 30 Minutes each Axis (X, Y, Z) | |
| Shock Test (Non-operation) | Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis) | |
| Thermal Shock Test (TST) | -20°C/30min, 60°C/30min, 100 cycles | Note 5-1 |
| ESD (Electro Static Discharge) | Contact Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point. | Note 5-2 |
| | Air Discharge: ± 15KV, 150pF(330Ω) 1sec 8 points, 25 times/ point. | |

- Note 5-1:** a. A cycle of rapid temperature change consists of varying the temperature from -20°C to 60°C, and back again. Power is not applied during the test.
b. After finish temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note 5-2: EN61000-4-2, ESD class B: Certain performance degradation allowed
No data lost
Self-recoverable
No hardware failures.

ESD discharged points should avoid display area and periphery front bezel of display area.

Suggest points were 4 side parallel edge of display area surface.


Metal front bezel must cover half area of BM (black matrix), and metal front bezel must connect with metal back bezel to protect source IC of panel by ESD damaged.

Note 5-3: Result Evaluation Criteria:

TFT-LCD panels test should take place after gradually cooling enough at room temperature.


6 Shipping Label

The label is on the panel as shown below: (Example)

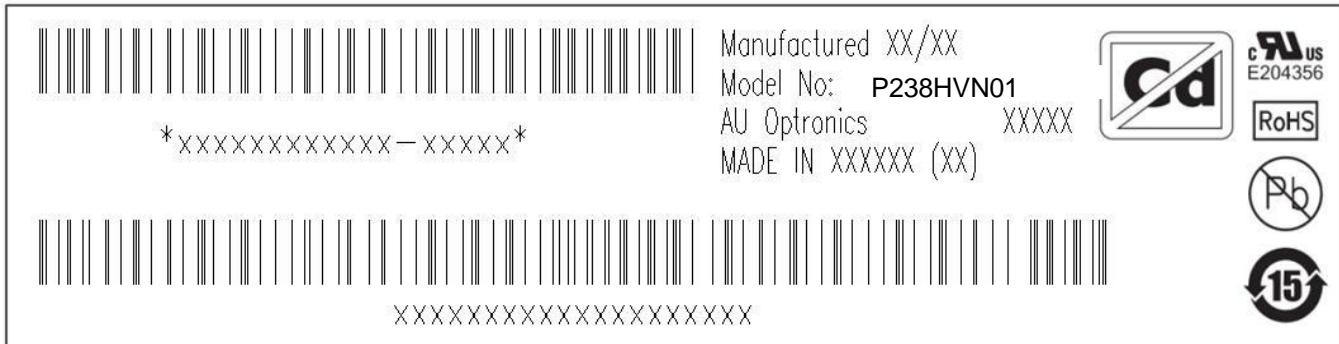

- (1) For Pb Free Product, ADP will add  for identification.
- (2) For RoHs compatible products, ADP will add  for identification.
- (3) For "Cadmium Free product, ADP will add  for identification.
- (4) Note: The green Mark will be present only when the green documents have been ready by ADP internal green team. (Definition of green design follows the ADP green design checklist.)

7 Mechanical Characteristics



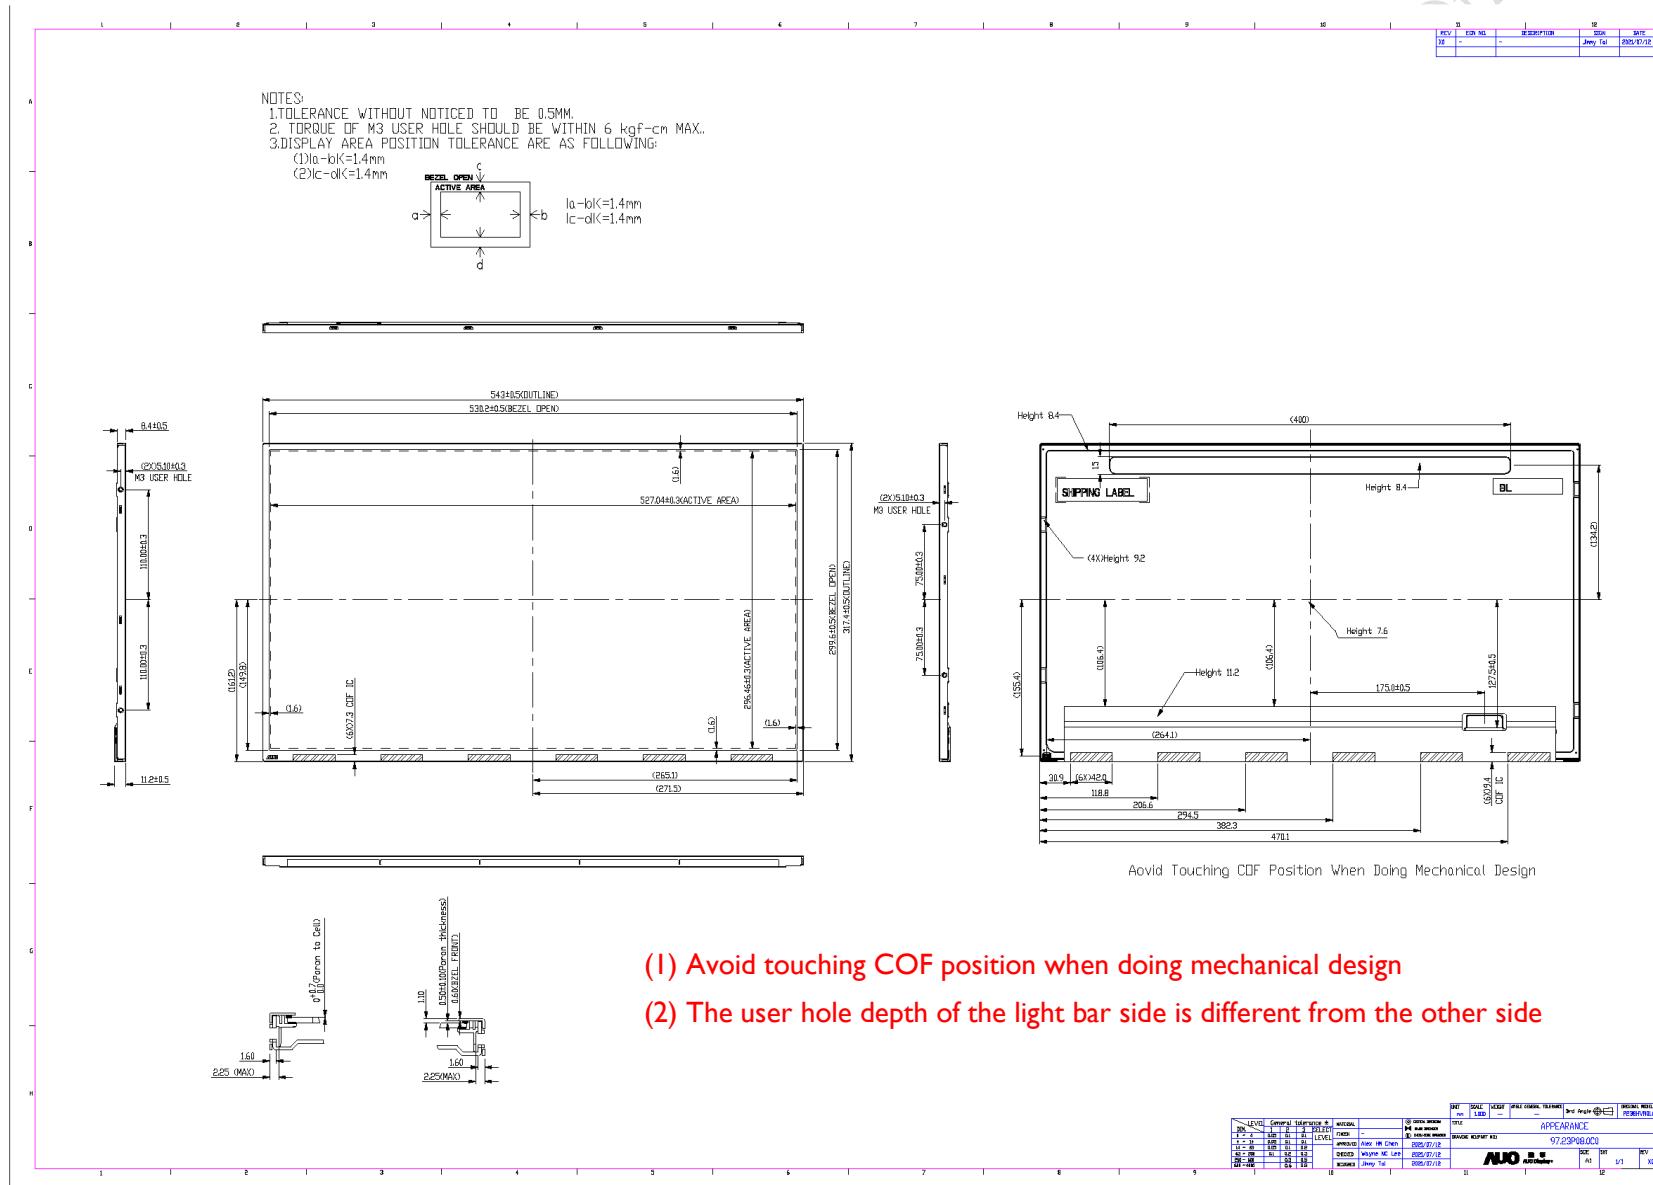


| PCB | PCB NO. | DESCRIPTION | REV. |
|-----|---------|-------------|-----------|
| 18 | - | Jerry Tel | V01 01/18 |

NOTES:


1. TOLERANCE WITHOUT NOTICED TO BE 0.5MM.
2. TORQUE OF M3 USER HOLE SHOULD BE WITHIN 6 kgf-cm MAX..
3. DISPLAY AREA POSITION TOLERANCE ARE AS FOLLOWING:

$$\begin{array}{l} (1)a-b=1.4\text{mm} \\ (2)c-d=1.4\text{mm} \end{array}$$

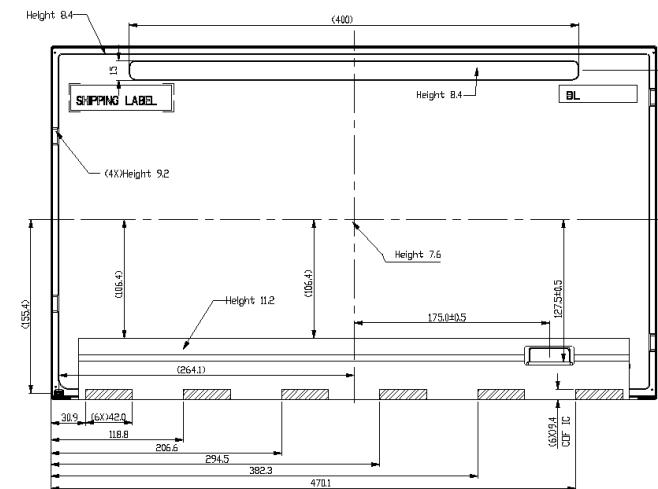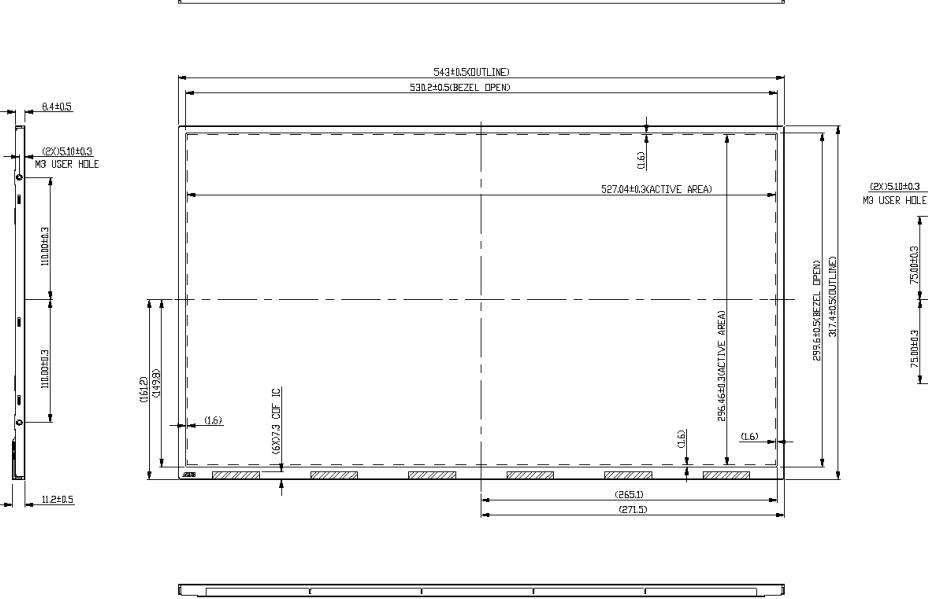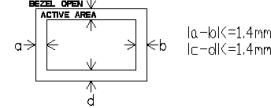

Avoid Touching COF Position When Doing Mechanical Design

- (1) Avoid touching COF position when doing mechanical design
- (2) The user hole depth of the light bar side is different from the other side


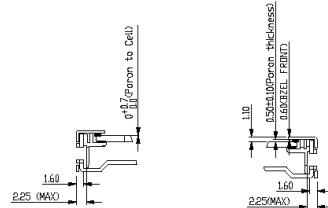


| LEVEL | | General Tolerance +/ - | | TOLER. | MATERIAL | APPEARANCE | SPECIFIED COLOR | PRINTED COLOR | MANUFACTURER |
|-----------|-----|------------------------|----|--------|----------|------------|-----------------|---------------|--------------|
| 1 | 2 | 3 | 4 | | | | | | |
| 1.5 ~ 2.0 | 0.5 | SL | BL | - | - | - | - | - | - |
| 2.0 ~ 2.5 | 0.5 | SL | BL | - | - | - | - | - | - |
| 2.5 ~ 3.0 | 0.5 | SL | BL | - | - | - | - | - | - |
| 3.0 ~ 3.5 | 0.5 | SL | BL | - | - | - | - | - | - |
| 3.5 ~ 4.0 | 0.5 | SL | BL | - | - | - | - | - | - |

AUO

8 Packing Specification

8.1 Packing Flow

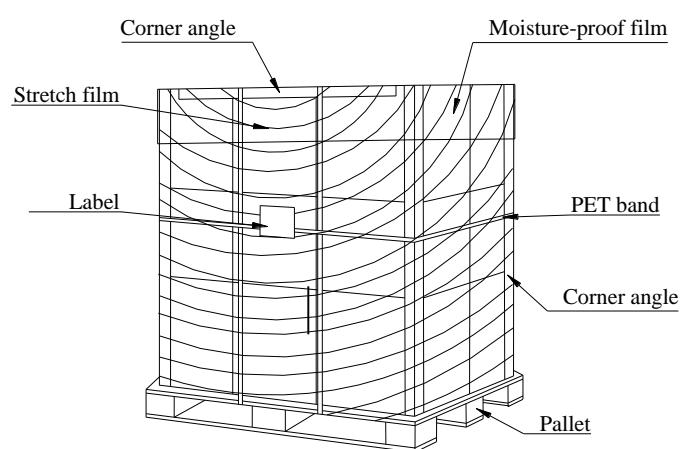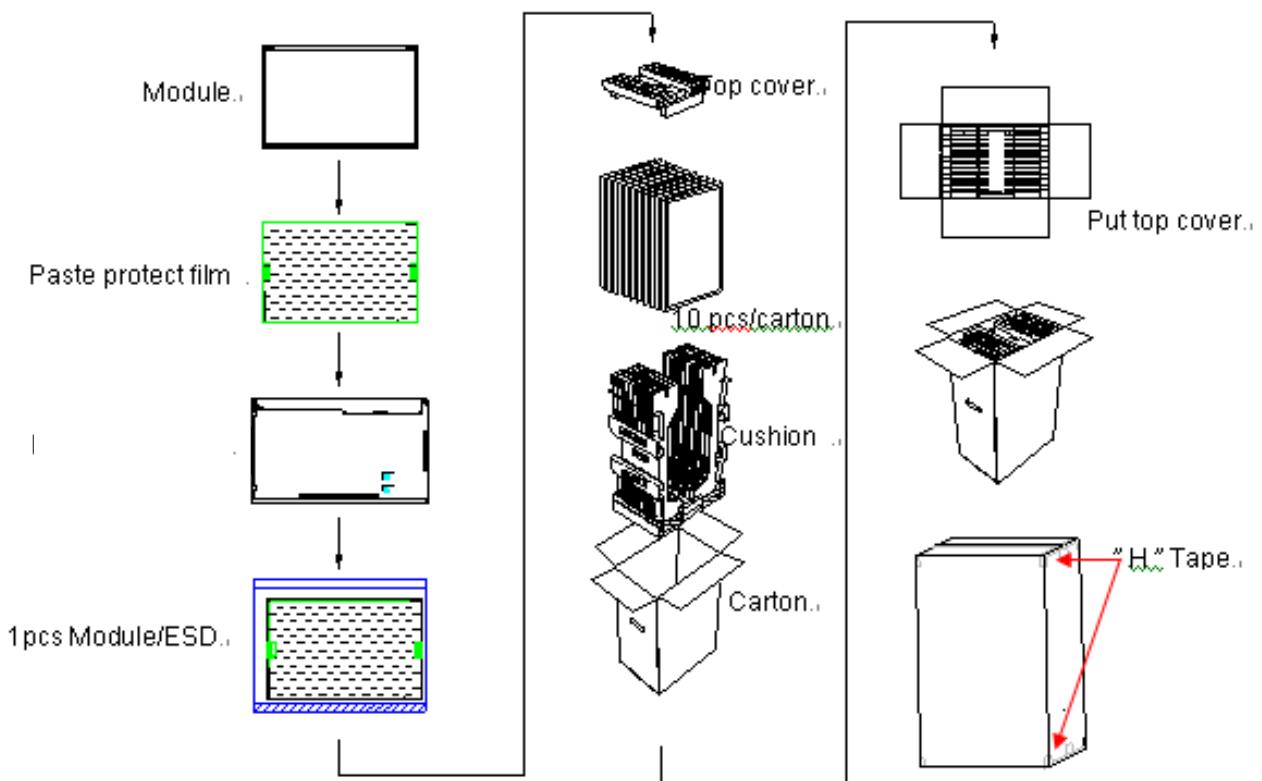

8.2 Pallet and shipment information

| Item | Specification | | | Remark |
|----------------------|-----------------|--------------------------------------|------------|-------------------------|
| | Q'ty | Dimension | Weight(kg) | |
| Panel | 1 | 543.0(H) x 317.4(V) x 11.2(D) (Typ.) | 2.28 | |
| Cushion | 1 | - | 1.7 | |
| Box | 1 | 412(L)mm x 281(W)mm x 650(H)mm | 1.2 | without Panel & cushion |
| Packing Box | 10 pcs/Box | 412(L)mm x 281(W)mm x 650(H)mm | 25.7 | with panel & cushion |
| Pallet | 1 | 1150(L)mm x 840(W)mm x 132(H)mm | 13.6 | |
| Pallet after Packing | 16 boxes/pallet | 1150(L)mm x 840(W)mm x 1432(H)mm | 424.8 | |