

Molded Case Circuit Breakers

G-TWIN series

External accessories

N type handles


MCCB	N type handle
BW32	BZ6N10D
BW50	
BW63	
BW100	
BW125	BW9N0CA
BW160	BW9N0GA
BW250	
BW400	BW9N0HA
BW630	BW9N0JA
BW800	

V type handles


MCCB	V type handle
BW32	BZ6V10D
BW50	
BW63	
BW100	
BW125	BW9V0CA
BW160	BW9V0GA
BW250	
BW400	BW9V0HA
BW630	BW9V0JA
BW800	

■ Type number nomenclature

• N type handle

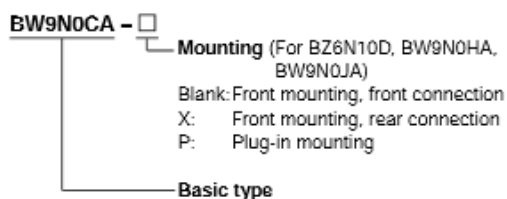

• V type handle

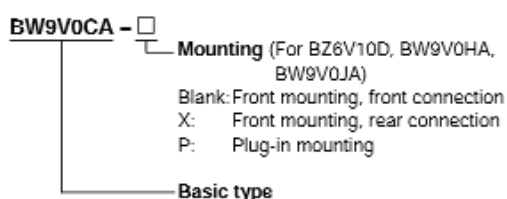


Note:
To order a V handle for front-mounting rear connection breakers, add "-X" to the type number; for plug-in mounting breakers, add "-P" to the type number.


F type handles

MCCB	N type handle
BW125	BW9F0CA
BW250	BW9F0GA
BW400	BW9F0HA


• F type handle



Cable (For F type)



Terminal cover (For F type)



Molded Case Circuit Breakers


G-TWIN series

External accessories

■ Dimensions, mm


N type handle

• BZ6N10D

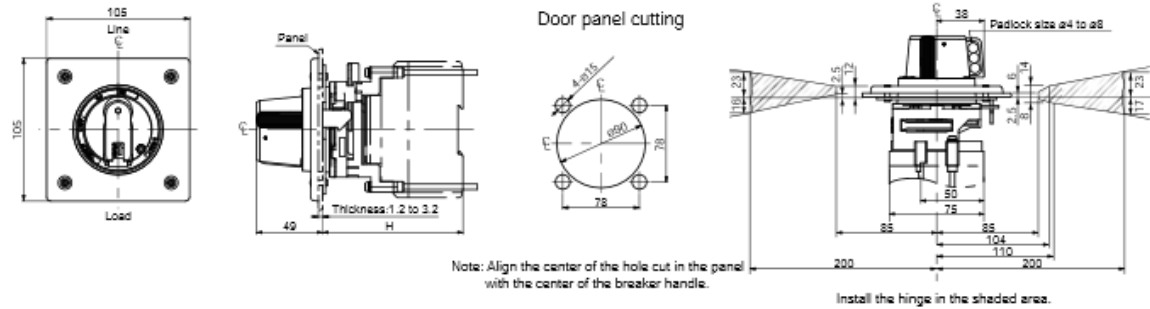

MCCB	Handle type	Dust proof packing	Mounting screw	H (mm)	Mass (kg)
BW32	BZ6N10D	Provided	M4 x 85	103	0.47
BW50	BZ6N10D-X	Provided	Contact FUJI	111	
BW63	BZ6N10D-P			111	
BW100					

• BW9N0CA, BW9N0GA

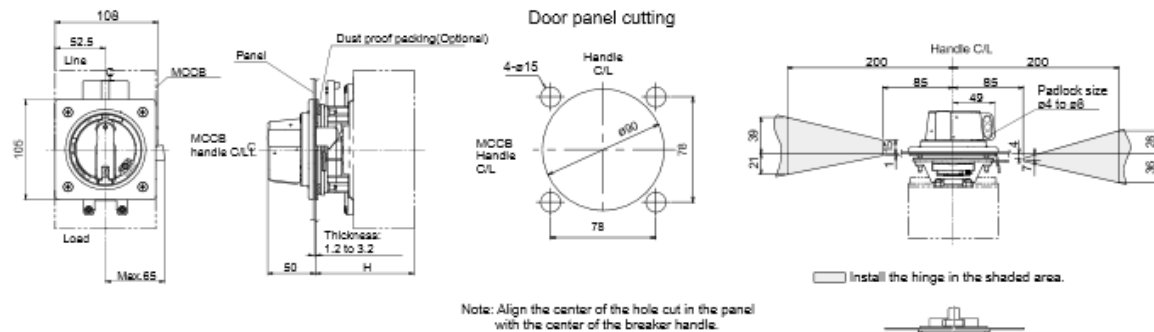

MCCB	Handle type	Dust proof packing	Mounting screw	H (mm)	Mass (kg)
BW125	BW9N0CA^{*1}	BZ-NP-1C	M4 x 85	103±2	0.56
BW160	BW9N0GA^{*2}	BZ-NP-1C	M4 x 85	103±2	0.56
BW250					

- Notes:
- The handle lock bars do not hold the entire door. Obtain a support bracket for the panel separately.
 - Remove the handle lock bar before opening the door. (Turn the handle in the open direction.)
The lock bar will be damaged if the door is opened with force while the lock bar is engaged.
 - Engage the door interlock securely before turning ON the power.
 - ^{*1} The Terminal Cover and Handle cannot be attached at the same time for the BW125JAG-2P or BW125RAGU-2P. Select the BW125JAG-3P or BW125RAGU-3P to use a Handle.
 - ^{*2} The terminal cover will cover the mounting screws for the Breaker. When attaching the terminal cover, a portion of the terminal cover will need to be removed.
Remove portion A in the following diagram.

