


# Catalogue No: 1734-OB8E

## POINT I/O 8DO 24V DC ELECTROINCALLY FUSED SOURCE MODULE

Automation Systems > Distributed I/O and Signal Converters > Fieldbus I/O Systems > Allen-Bradley Point I/O™ > POINT I/O™ Modules > POINT I/O™ Digital I/O Modules

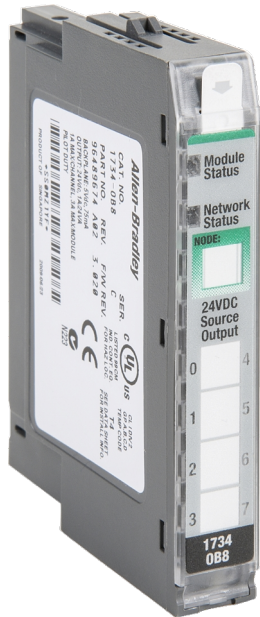

### Point I/O 8 Channel Source Output Module, 24V DC, Electronically Protected

- Input, output, and relay output modules
- Wide variety of voltages
- Point-level output fault states for short-circuit and wire-off diagnostics
- Field-side diagnostics on select modules
- Choice of direct-connect or rack-optimised communications
- POINT Guard I/O™ modules for safety applications
- Configurable modules - each point can be configured as a DC input or output
- DeviceLogix™ technology available

Representative Photo Only  
(actual product may vary based on configuration selections)

#### SPECIFICATIONS

Product Series	Point I/O (Bul. 1734)
Component Type Fieldbus I/O	Digital Output Module
Number of Digital Outputs	8 qty
Digital Output Type	24V DC Sourcing (NPN) Electronically Protected type
Digital Output Range	10 ... 28.8V DC
Rated Current per Digital Output, Max	3 A max, per DO
Rated Current per Module, Max	1 A max, per module
Power Supply	24V DC
Operating Temperature, Max	55 °C max
Operating Temperature, Min	-20 °C min
Storage Temperature, Max	85 °C max
Storage Temperature, Min	-40 °C min
Relative Humidity, Max	95 %RH
Humidity Type	Non-condensing

#### REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-