



I-SYSTEM MOTION DET. RELAY INSERT 230V 50/60HZ
MAX. 2300W 3-WIRE CONNECTION SYSTEM

Similar to image

Technical data:		
Design type		device inserts
Type, explanations		motion detector relay insert
Type, explanations / additionally		flush-mounting device insert for motion detector attachments for switching wide-ranging light sources and electrical consumers of up to max. 10 A / 230 V
Design, description / additional supplementary		for claw and screw fixing, screw-type terminals
Switching capacity real power	W	2,300
Breaking capacity current	A	10
Operating voltage / nominal value	V	230
Type of mounting		flush mounted
Suitability for interaction		
• 230 V incandescent lamp/halogen lamp		Yes
• electronic transformer		Yes
• conventional transformer		Yes
• Fluorescent Lamp		Yes
• Staircase time switch		No
Suitability for use / only extension		No
Product function / positive opening		No
Product component / Extension input		No

Ambient temperature / during operating		
	• minimum	°C 5
	• maximum	°C 40
Protection class IP		IP20

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
 GOST	 VDE	 EG-Konf.
		Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/5TC1500/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TC1500

CAX-Online-Generator

<http://www.siemens.com/cax>

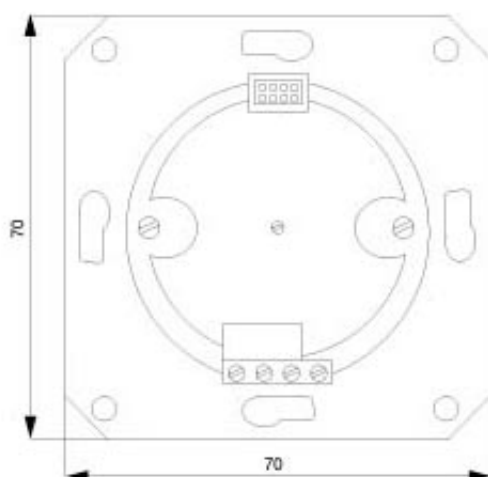

last change:

Jul 1, 2013