



ASISAFE BASIC SAFETY MONITOR 2 F-RO,
2 ENABLING CIRCUITS, IP20,
WITH SCREW-TYPE TERMINALS (REMOVABLE),
SAFE OUTPUT RELAY RESPONSE TIME MAX. 40 MS,
MONITOR TYPE 2, VERSION 3,
APPLICABLE UP TO CATEGORY 4 (EN 954-1),
UP TO PL E (EN ISO 13849-1),
UP TO SIL 3 (IEC 61508),
FOR AS-INTERFACE / AS-I SAFETY AT WORK

General technical data:

Design of the product		safety monitor
Protocol / is supported / AS interface protocol		Yes
Type		2 enabling circuits
Number of release circuits		2
Response time / max.	ms	40
Design of the electrical connection / of the inputs and outputs		screw terminal
Rated operational current Ie		
<ul style="list-style-type: none"> AC-12, 50/60 Hz / 250 V 	A	3
<ul style="list-style-type: none"> AC-15, 50/60 Hz 	A	3
<ul style="list-style-type: none"> 115 V 	A	3
<ul style="list-style-type: none"> 230 V 	A	3
<ul style="list-style-type: none"> DC-12 (DC-1) / 24 V 	A	3
<ul style="list-style-type: none"> DC-13 (DC-11) 	A	1
<ul style="list-style-type: none"> 24 V 	A	0.1
<ul style="list-style-type: none"> 115 V 	A	0.05
<ul style="list-style-type: none"> 230 V 	A	0.05
Reference code		
<ul style="list-style-type: none"> according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 	A	
<ul style="list-style-type: none"> according to DIN EN 61346-2 	F	

Ambient conditions:

Ambient temperature

- during operating
- during storage

°C	60 ... -20
°C	70 ... -30

Protection class IP

IP20

Mechanical design:

Width

mm 45

Height

mm 108

Depth

mm 120

Mounting type

screws / standard rail

Certificates/approvals:

General Product Approval

Functional Safety / Safety of Machinery



Declaration of Conformity



EG-Konf.

Shipping Approval



Shipping Approval

other



[Confirmation](#)

[Declaration of
Conformity](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator



<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1105-1BE04-0CA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1105-1BE04-0CA0

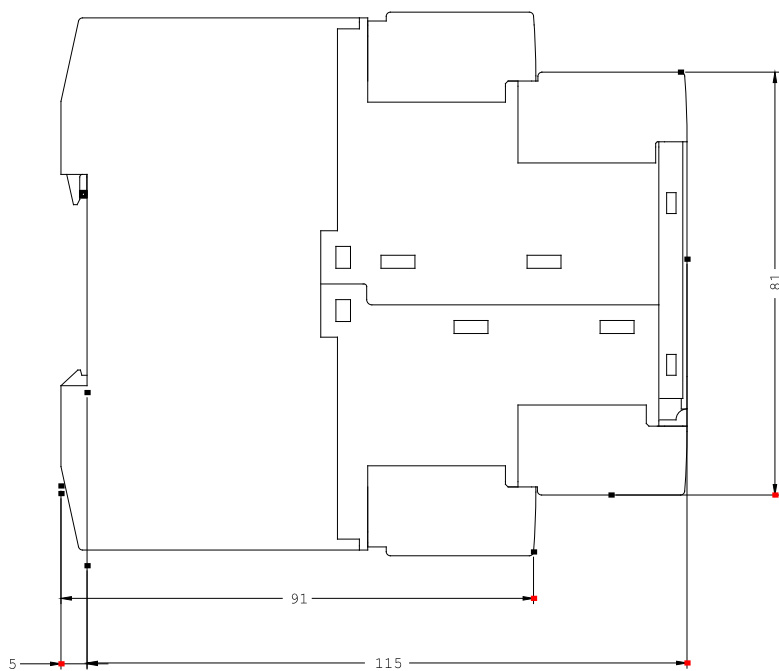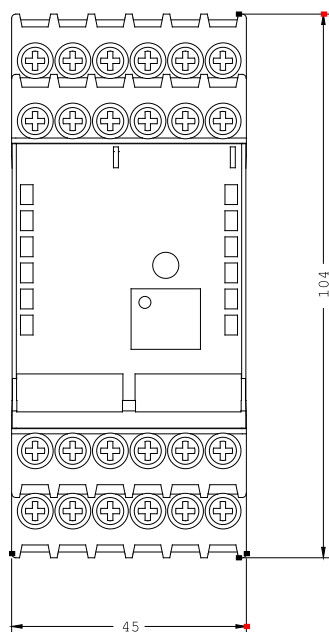

last change:

Jul 7, 2014