



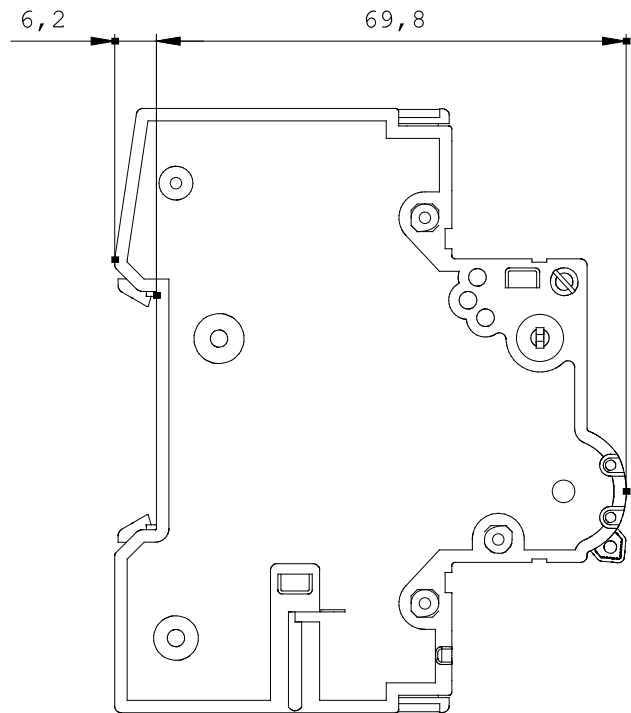
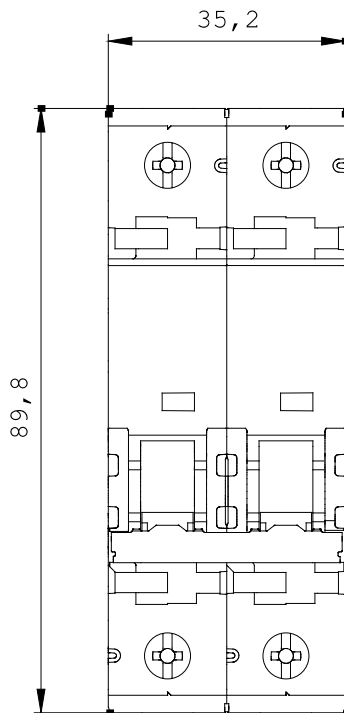
CIRCUIT BREAKER CURR. SENS DC 440V AC 400V
10KA,
2-POLE, C, 16A

Similar to image

Technical data:		
Type of mounting		Quick assembly system
type of voltage		AC/DC
Height	mm	90
Width	mm	36
Depth	mm	76
mounting position		any
Mounting depth	mm	70
Current / for AC / rated value	A	16
Tripping characteristic class		C
Supply voltage		
• for AC / rated value	V	400
• with multi-phase operation / with AC / rated value	V	400
Switching capacity current		
• with DC / in accordance with IEC 60947-2 / rated value	kA	15
• acc. to EN 60898 / rated value	kA	10
Breaking capacity short-circuit current (Icn)		
• with DC / in accordance with EN 60898-2	kA	10

Active power loss / at rated value current / with AC / in warm operating state / per pole	W	3.4
Number of pitch units for width		2
Product feature / sealable		Yes
Degree of pollution		3
Ambient temperature	°C	-25 ... +55
Ambient temperature <ul style="list-style-type: none"> during storage 	°C	-40 ... +75
Position / of power supply cord		Any
Product property / properties for main switches in accordance with EN 60204-1		Yes
Mechanical operating cycles as operating time / typical		20,000
Overvoltage class		3
Product equipment / touch-protection		Yes
Resistance against shock / according to IEC 60068-2-27		150m/s² at 11ms half-sine
Insulation voltage <ul style="list-style-type: none"> with multi-phase operation / with AC / rated value for DC / rated value 	V V	440 250
AWG number <ul style="list-style-type: none"> as encoded connectable conductor cross-section 		14 ... 4
Section de conducteur raccordable <ul style="list-style-type: none"> solid multibrin finely stranded with wire end processing 	mm² mm² mm²	0.75 ... 35 0.75 ... 35 0.75 ... 25
Product component <ul style="list-style-type: none"> combined terminal top combined terminal bottom 		Yes Yes
Tightening torque <ul style="list-style-type: none"> with screw-type terminals 	N·m	2.5 ... 3
Tightening torque (lbf·in) <ul style="list-style-type: none"> with screw connection 	lbf·in	22 ... 26
Product feature <ul style="list-style-type: none"> [not supplied - silicon-free] halogen-free 		Yes Yes
Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30		6
Item designation / according to DIN EN 61346-2		F

Certificates/approvals:

General Product Approval**Declaration of
Conformity****other**[other](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/lowvoltage/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/lowvoltage/mall>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/5SY5216-7/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY5216-7**CAX-Online-Generator**<http://www.siemens.com/cax>**last change:**

Dec 31, 2012